

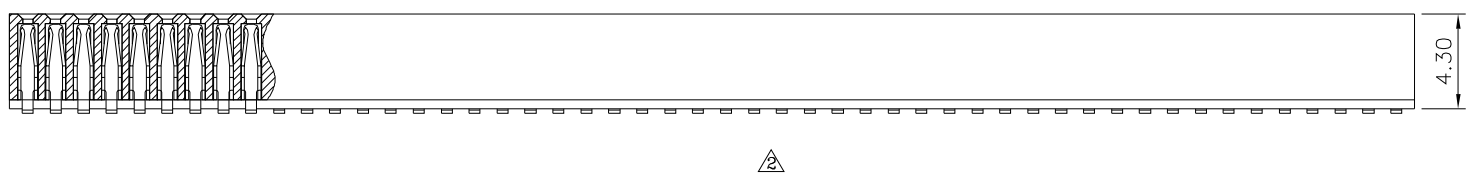
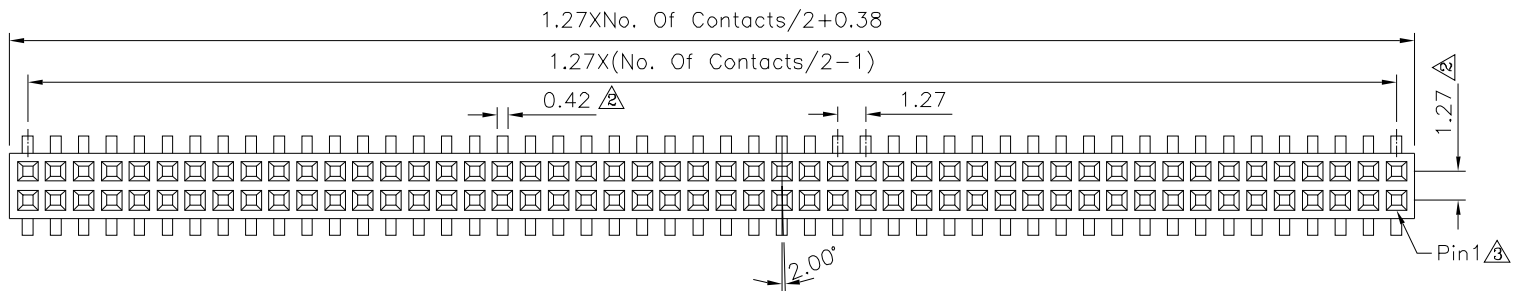


△ SPECIFICATION
 Current Rating:1 Amp
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Withstanding:500V AC
 Operating Temperature:-40°C~+105°C
 Max. Processing Temperature:
 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
△ Housing:LCP(UL94V-0),Black
 RoHS Compliant

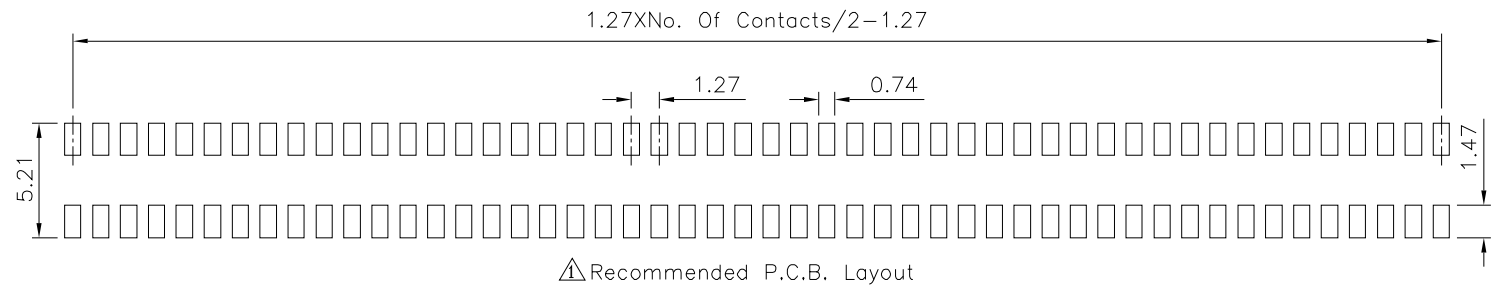

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
 18472

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 YBL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ X. ±0.20
 △ .X ±0.15
 △ .XX ±0.10
 △ .XXX ±0.05

SCALE NONE REV. A3 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	09/26/2013
△ A2		Modify Data	HZF	04/29/2010
△ A1		Modify Data	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005