

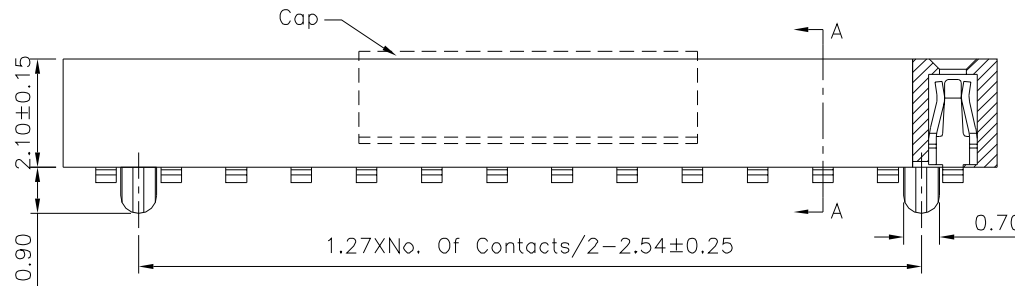

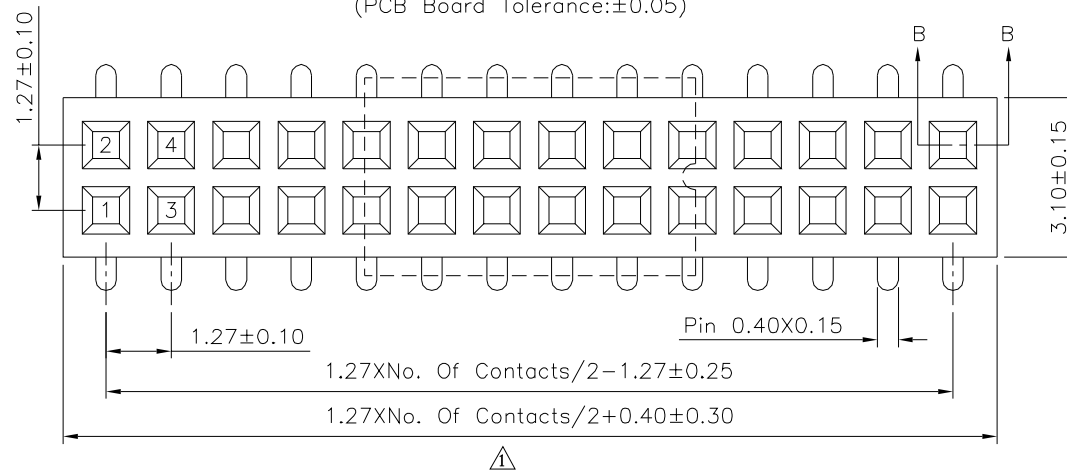


SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contacts:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

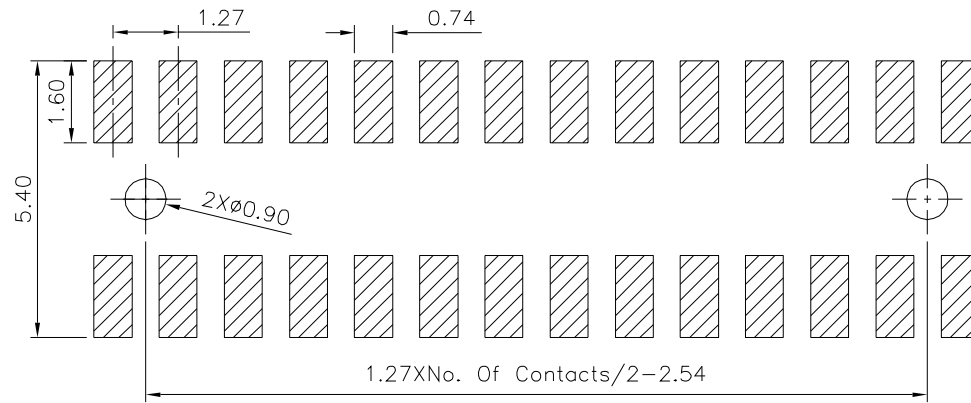

Section B-B

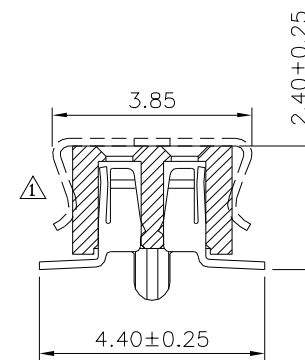

Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18493

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

B1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



NO.

REV.

REVISIONS

CHK

DATE

B1 Modify Data

B0 NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

04/14/2015

12/08/2014

0