

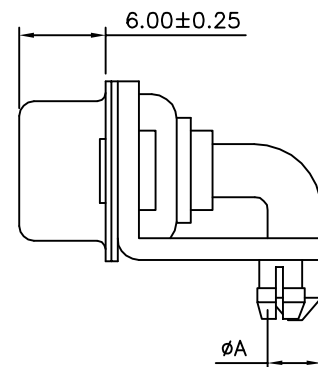
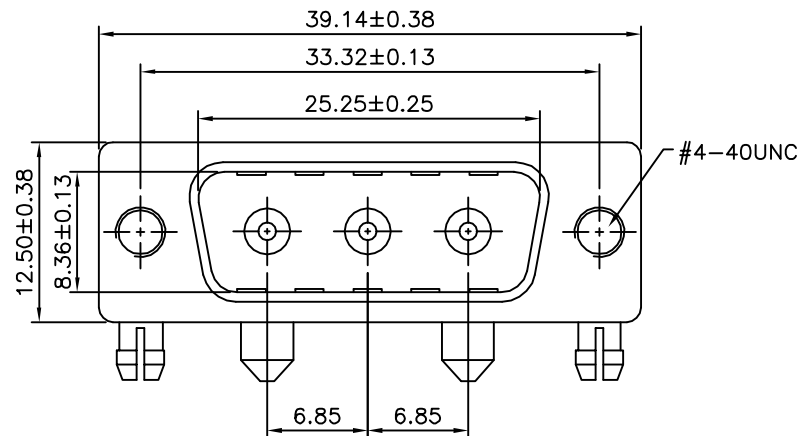


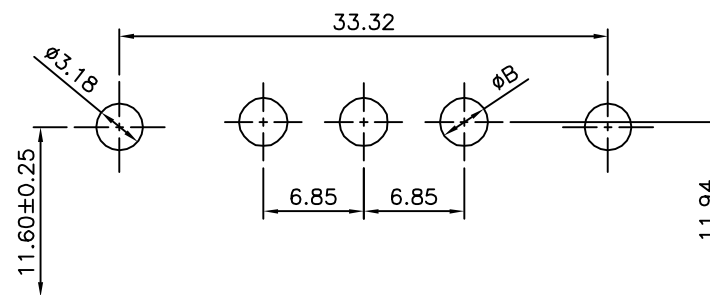

SPECIFICATION

Signal Contact Current Rating:5 Amp
 Power Contact Current Rating:10~40 Amp
 Dielectric Withstanding Voltage:1000V AC Per Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+125°C
 Insulator:PBT+30%G.F.(UL94V-0)
 Signal Contact:Brass,Gold Plated Over Nickel
 Power Contact:Brass,Gold Plated Over Nickel
 Metal Shell:Steel,Tin Plated
 Metal Bracket:Steel,Nickel Plated
 Boardlock:Brass,Nickel Plated
 RoHS Compliant

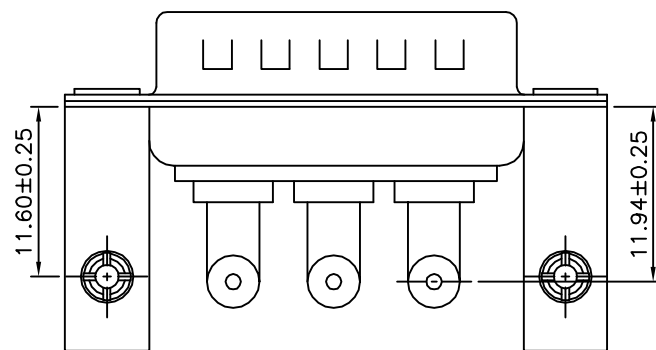

Recommended P.C.B. Layout

Item No.	Current Rating	ØA	ØB
20017	20 Amps	2.80	3.28
18498	30 Amps	3.20	3.65

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18498

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.3

.XX ±0.3

ANG. ±2°


SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

08/01/2012

CHK

DATE