

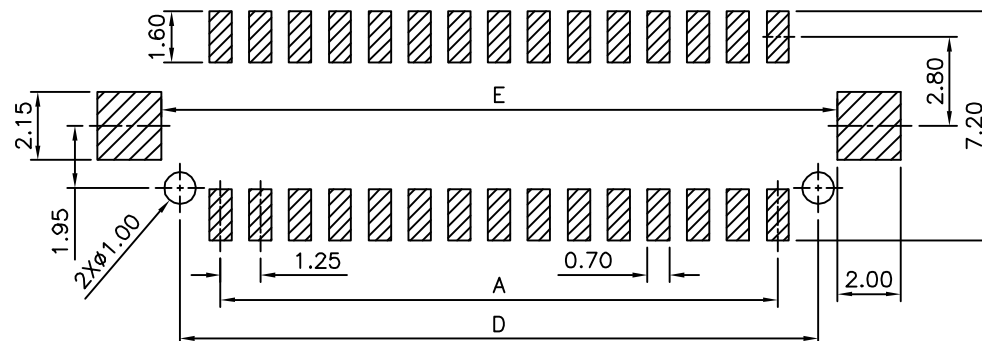
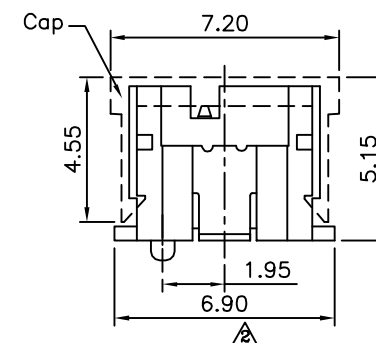


△ SPECIFICATION

Current Rating:1.0 Amp
Voltage Rating:250V AC/DC
Withstand Voltage:250V AC/DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Operation Temperature:-25°C~+85°C
Insulator:PA9T+30%G.F.(UL94V-0)
Contact:Brass,Gold Flash Over All,Over Nickel
Fixing Material:Brass,Gold Plated Over Nickel
RoHS Compliant

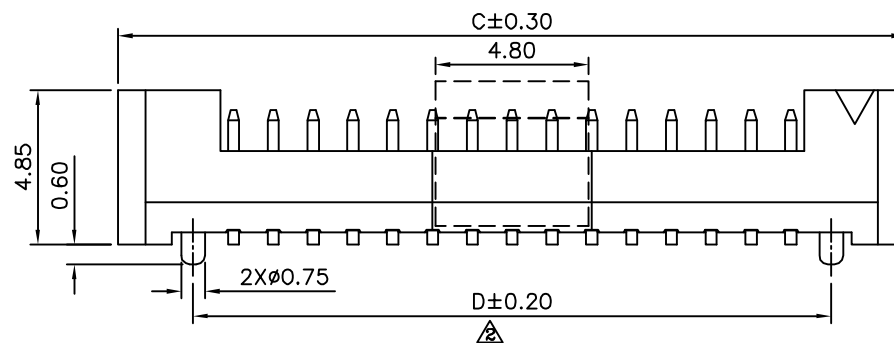

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05) △

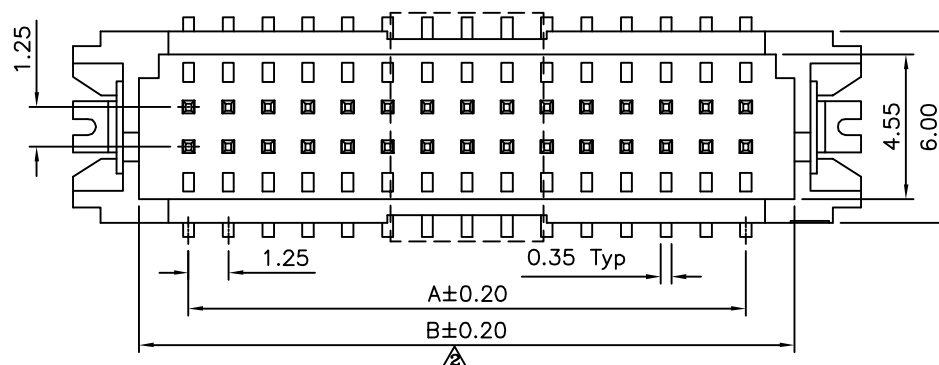

Pin	A	B	C	D	E
10	5.00	8.10	12.25	7.55	8.75
20	11.25	14.35	18.50	13.80	15.00
30	17.50	20.60	24.75	20.05	21.25
40	23.75	26.85	31.00	26.30	27.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18591

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/11/2015
△ A1		Modify Data	HZF	12/05/2012
△ A0		NEW RELEASE	HZF	02/18/2012