
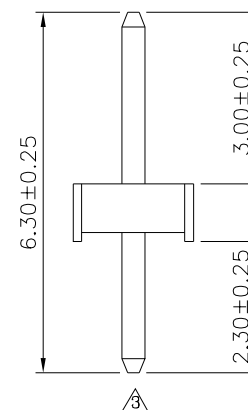
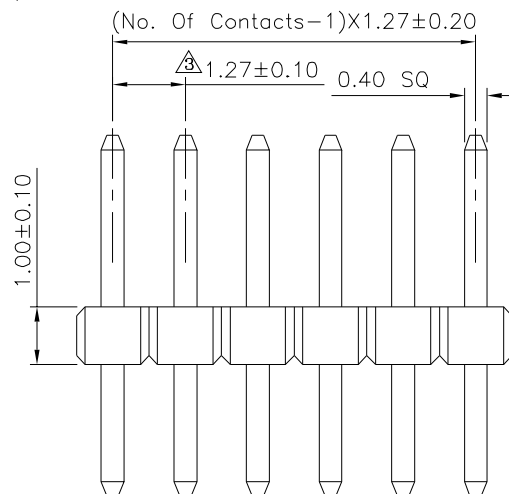


Recommended P.C.B Layout

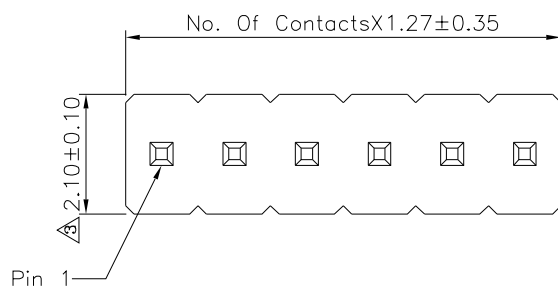

△ SPECIFICATION

Current:1A

Withstanding Voltage:1000V AC Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:5000 Megaohms Min.

Operation Temperature:-55°C~+105°C

Housing:PA6T(UL94V-0),Black

△ Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18624

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	11/29/2013
△2	B2	Modify Data	HZF	08/25/2010
△1	B1	Modify Data	HZF	08/15/2009
△0	B0	NEW RELEASE	HZF	07/07/2009

SCALE NONE

REV.

B3