


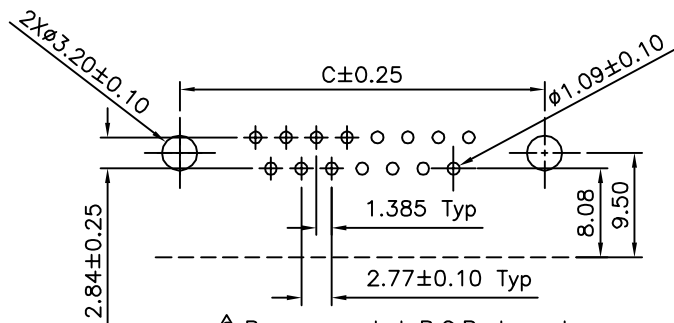

△ Recommended P.C.B. Layout

△△ SPECIFICATION

Current Rating: 5 Amps
Withstanding Voltage: 1000V(One Minute)
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
At 500V DC

Operating Temperature: -50°C~+105°C

Insulator: PBT+30%G.F.(UL94V-0), Black

Shell: SPCC, Nickel Plated

Contact: Brass





Gold Flash On Contact Area

Tin Plated On Solder Tail, Over Nickel

Z Flake: SPCC, Tin Plated

Rivet: Copper Alloy, Nickel Plated

RoHS Compliant

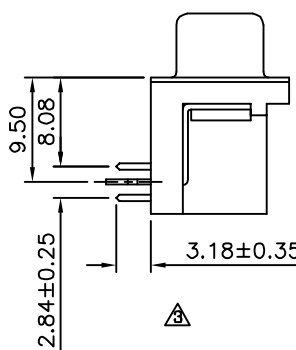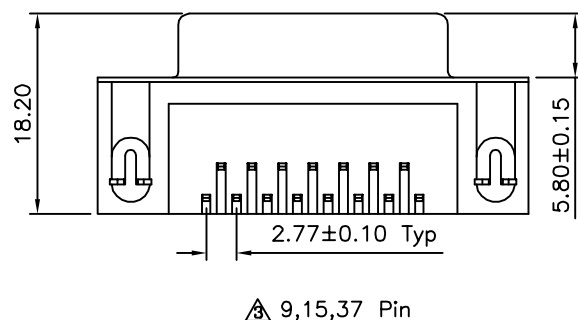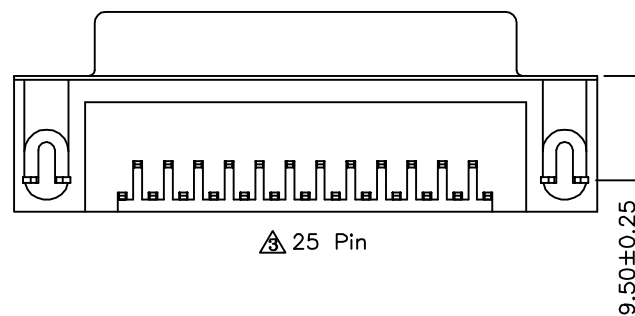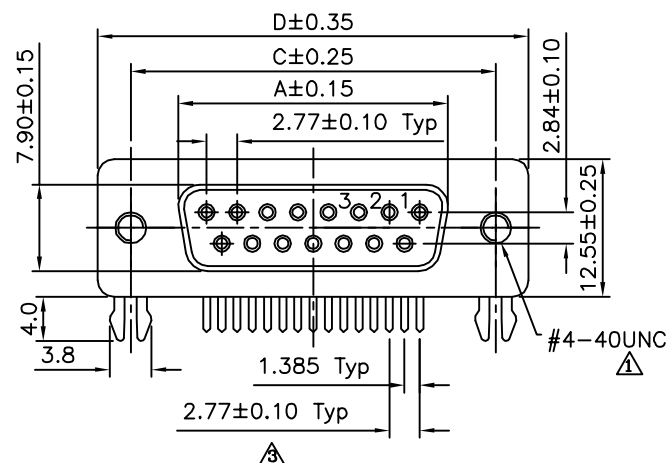

△ Pin	A	C	D
09	16.33	24.99	30.81
15	24.80	33.32	39.20
25	38.38	47.04	53.04
37	54.84	63.50	69.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18743

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WSS


REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△.X ±0.38 .X" ±3°
.XX ±0.25 .XX" ±1°
.XXX ±0.05 .XXX" ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	07/11/2011
△	A2	Modify Data	HZF	10/10/2009
△	A1	Add Aperture #4-40UNC	HZF	06/08/2007
△	A0	NEW RELEASE	HZF	11/28/2006