





SPECIFICATION

Current Rating:3Amps/Contact Max.
 Contact Resistance:4Milliohms Max/Contact
 Insulation Resistance:1000Megohms Max At 100V
 Operating Voltage:60VAC/DC
 Average Insertion Force With Steel Pin Of 0.30mm SQ:<80g
 Average Withdrawal Force With Steel Pin Of 0.30mm SQ:>15g Min
 Mechanical Life Cycle:Min.200
 Operating Temperatures:Tin Plated:-40°C~+105°C
 Soldering Temperature:+260°C,10s Max
 Insulator Black(Housing):PPS(UL94V-0)
 Pin(Outer Sleeve):Brass,Machined CuZn38Pb2
 Plating(Outer Sleeve):Tin Plated Over Nickel
 Clip(Contact 4 Finger):Beryllium Copper,Heat Treated
 Plating(Contact):Gold Plated Over Nickel

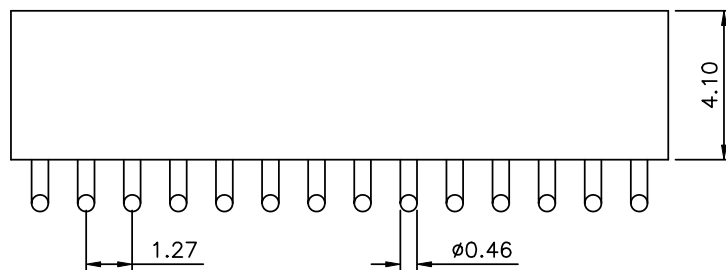

P.C.B Layout

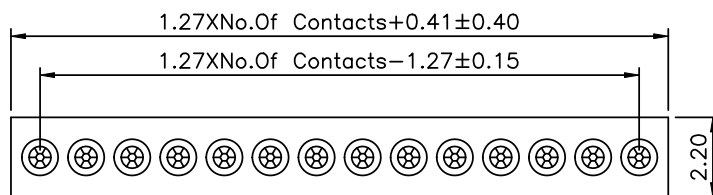

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19034

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


LXX

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.20
 XX ±0.15
 XXX ±0.10
 .XXX ±0.05
 ANG ±5°

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

10/12/2007

DATE