





△ SPECIFICATION
 Current: 3A
 Withstanding Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -55°C~+105°C
 Housing: PBT(UL94V-0), Black
 Contact: Copper Alloys, Gold Plated
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

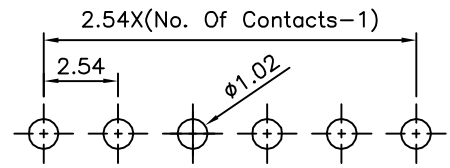

Recommended P.C.B. Layout

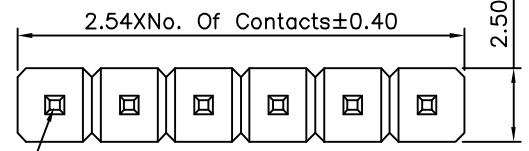

Pin 1

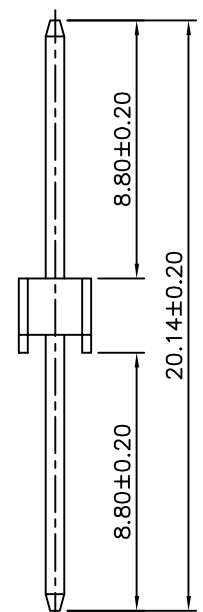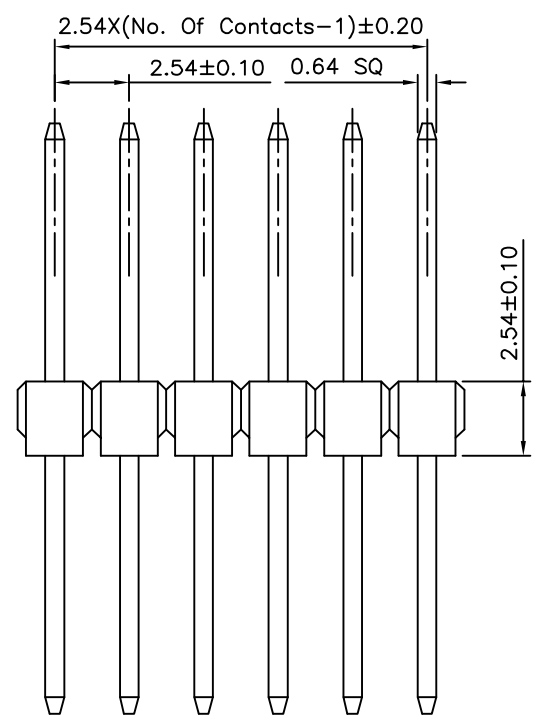

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
19124		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	08/08/2011
△ A0		NEW RELEASE	HZF	02/05/2008