

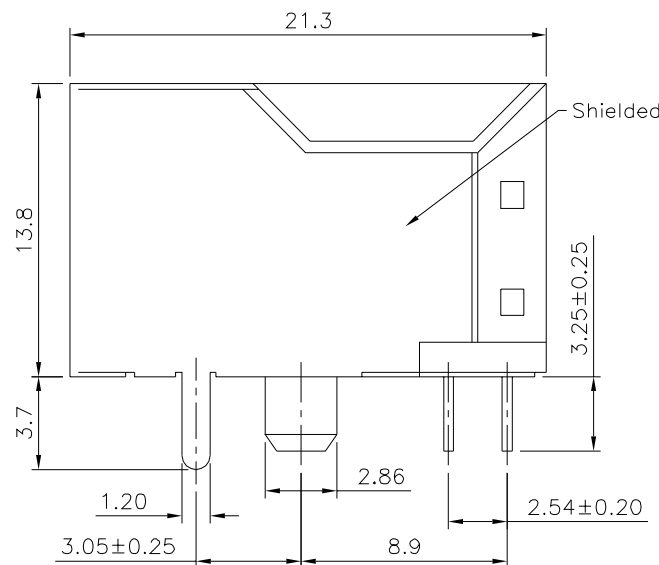
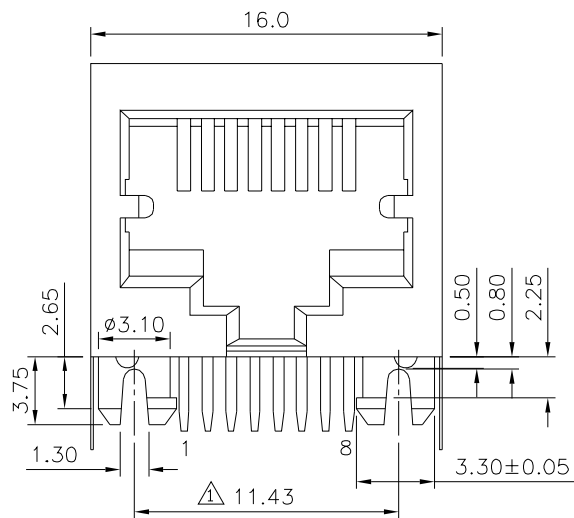


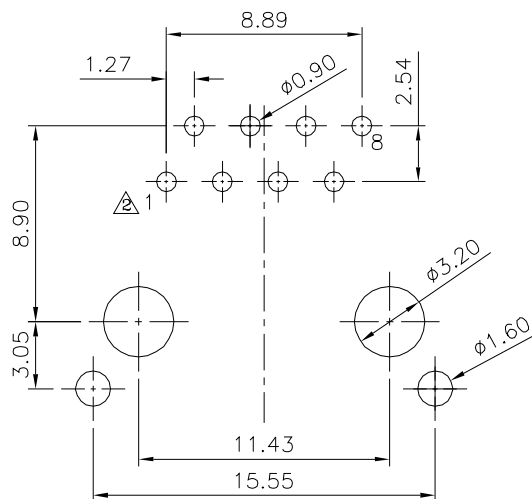

3.1 SPECIFICATION

Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature: -40°C~+85°C
 Relative Humidity:70% ±10%RH
 Insulation Resistance:500 Megaohms Min. Initial
 At 500V DC
 Contact Resistance:20 Milliohms Max. Initial
 30 Milliohms Max. Final
 Durability:750 Cycles
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz,1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz,1 Minute Between
 Shield And Contacts
 Housing:PBT+G.F.(UL94V-0),Black
 Contacts:Phosphor Bronze Ø0.45mm
 Gold Flash Over All,Over Nickel
 Shield:Brass,Nickel Plated
 Cavity Confirms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

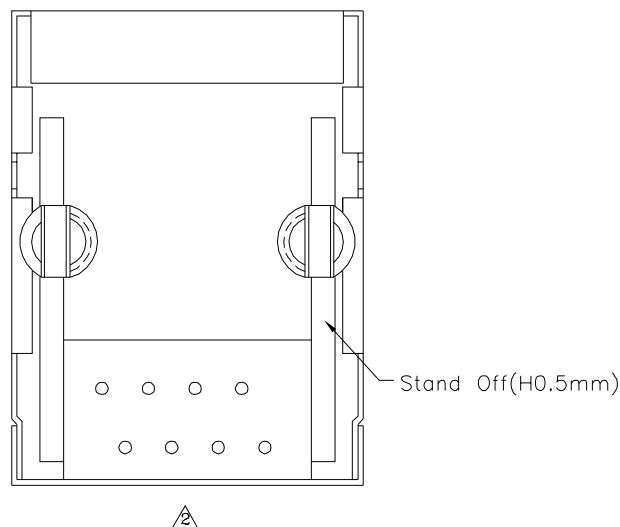

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19125

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05
 ANG.

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	02/22/2017
2	A2	Modify Data	HZF	09/13/2013
1	A1	Modify Data	HZF	01/28/2010
0	A0	NEW RELEASE	BECKY	09/13/2005