

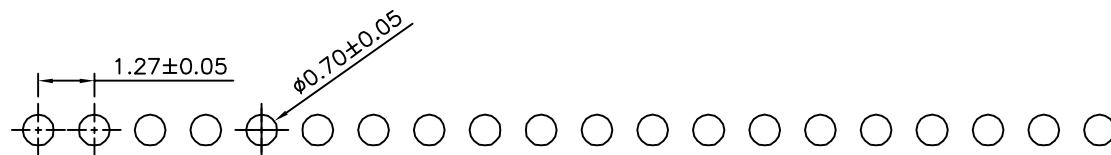



SPECIFICATION

Current Rating:1.0 Amps/Contact Max.
 Withstand Voltage:300V AC/Minute
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:500 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

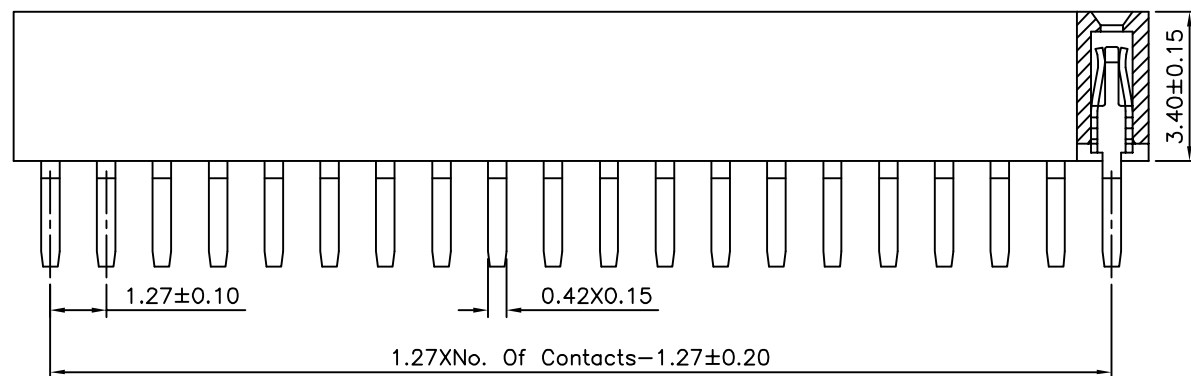

Recommended P.C.B. Layout

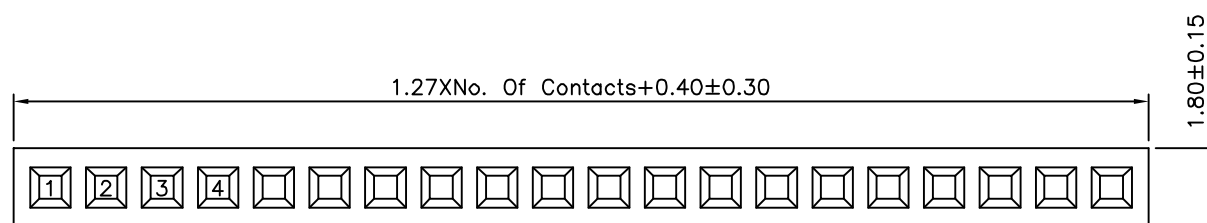

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19372

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

AO

NEW RELEASE

HZF

07/26/2012