

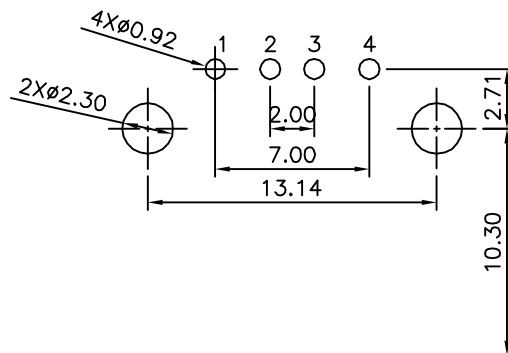
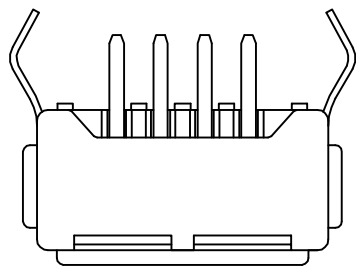
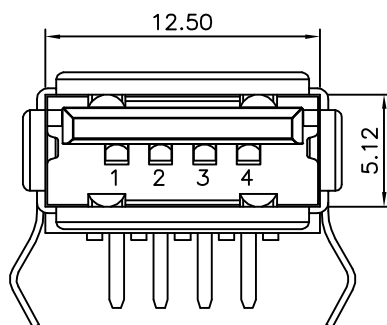
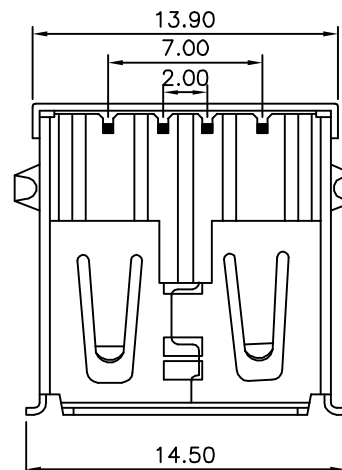


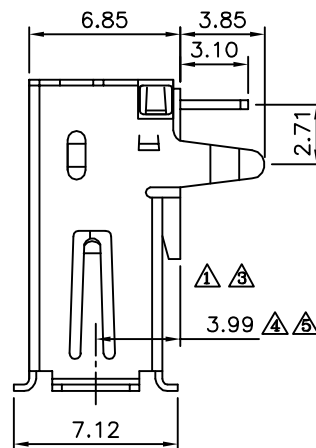

⚠ Recommended P.C.B. Layout

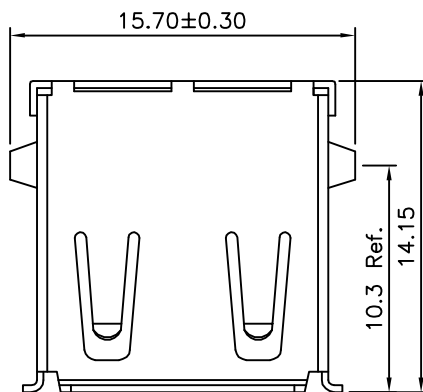

SPECIFICATION

Current:1.5A Max.
Voltage:30V Max.
Withstanding Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-55°C~+85°C
Mating Force:35N Max.
Withdrawal Force:10N Min.
Durability:1500 Cycles Min.
Insulator:LCP+30%G.F.(UL94V-0),Natural Color
⚠ Contact:Brass

Gold Plated 30u" On Contact Area

Tin Plated On Solder Tail,Under Nickel

Shell:Brass,Nickel Plated Over All

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19377

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WZL


REV.

A5

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±2*
.XX ±0.25 .XX* ±1*
.XXX ±0.13 .XXX* ±0.5*

UNIT
mm



⚠ A5	Modify Dim. 4.10-->3.99	HZF	04/27/2011
⚠ A4	Add Dim. 4.10	HZF	02/15/2011
⚠ A3	Modify Data	HZF	12/24/2010
⚠ A2	Modify P/N Code	HZF	09/21/2010
⚠ A1	Modify Data	HZF	09/17/2010
⚠ A0	NEW RELEASE	HZF	09/09/2009
NO. REV.	REVISIONS	CHK	DATE