
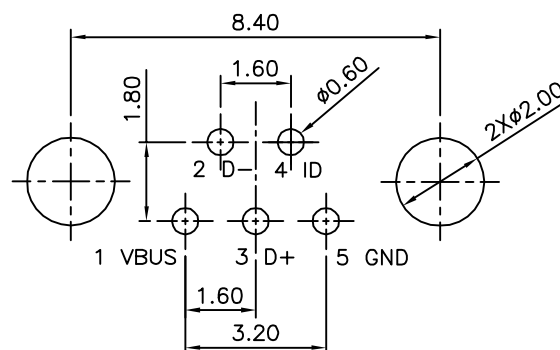
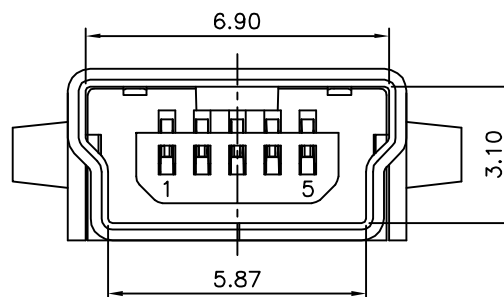
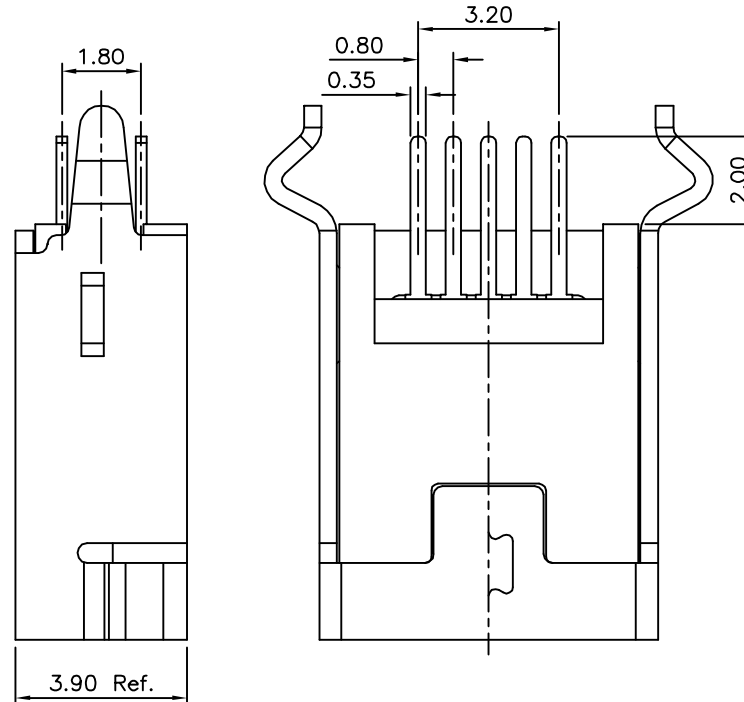


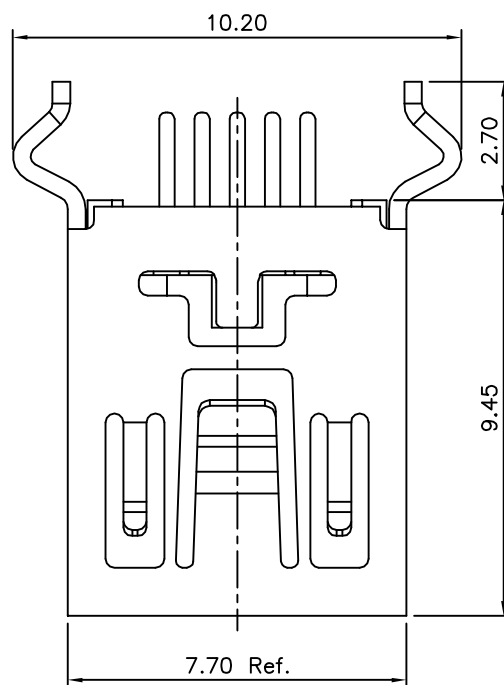

Recommended P.C.B. Layout
(Thickness=1.00mm)

SPECIFICATION

Current Rating:1.0A Max.
Voltage Rating:30V Max.
Withstanding Voltage:100V AC
Contact Resistance:50 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:-55°C~+85°C
Mating Force:35N Max.
Withdrawal Force:7N Min.
Durability:5000 Cycles,0.3 Kg Min.
Contacts:Phosphor Bronze
Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Insulator:LCP+30%G.F.(UL94V-0),Black
Shell:Phosphor Bronze,Nickel Plated Over All
RoHS Compliant

Pin	Function
1	VBUS
2	D-
3	D+
4	ID
5	GND

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19378

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±1.0*

.XX ±0.25 .XX* ±0.5*

.XXX ±0.15 .XXX* ±0.2*

UNIT
mm



NO. REV.



REVISIONS

Modify Data

NEW RELEASE

CHK

HZF

HZF

DATE

09/15/2013

09/15/2013

DATE