




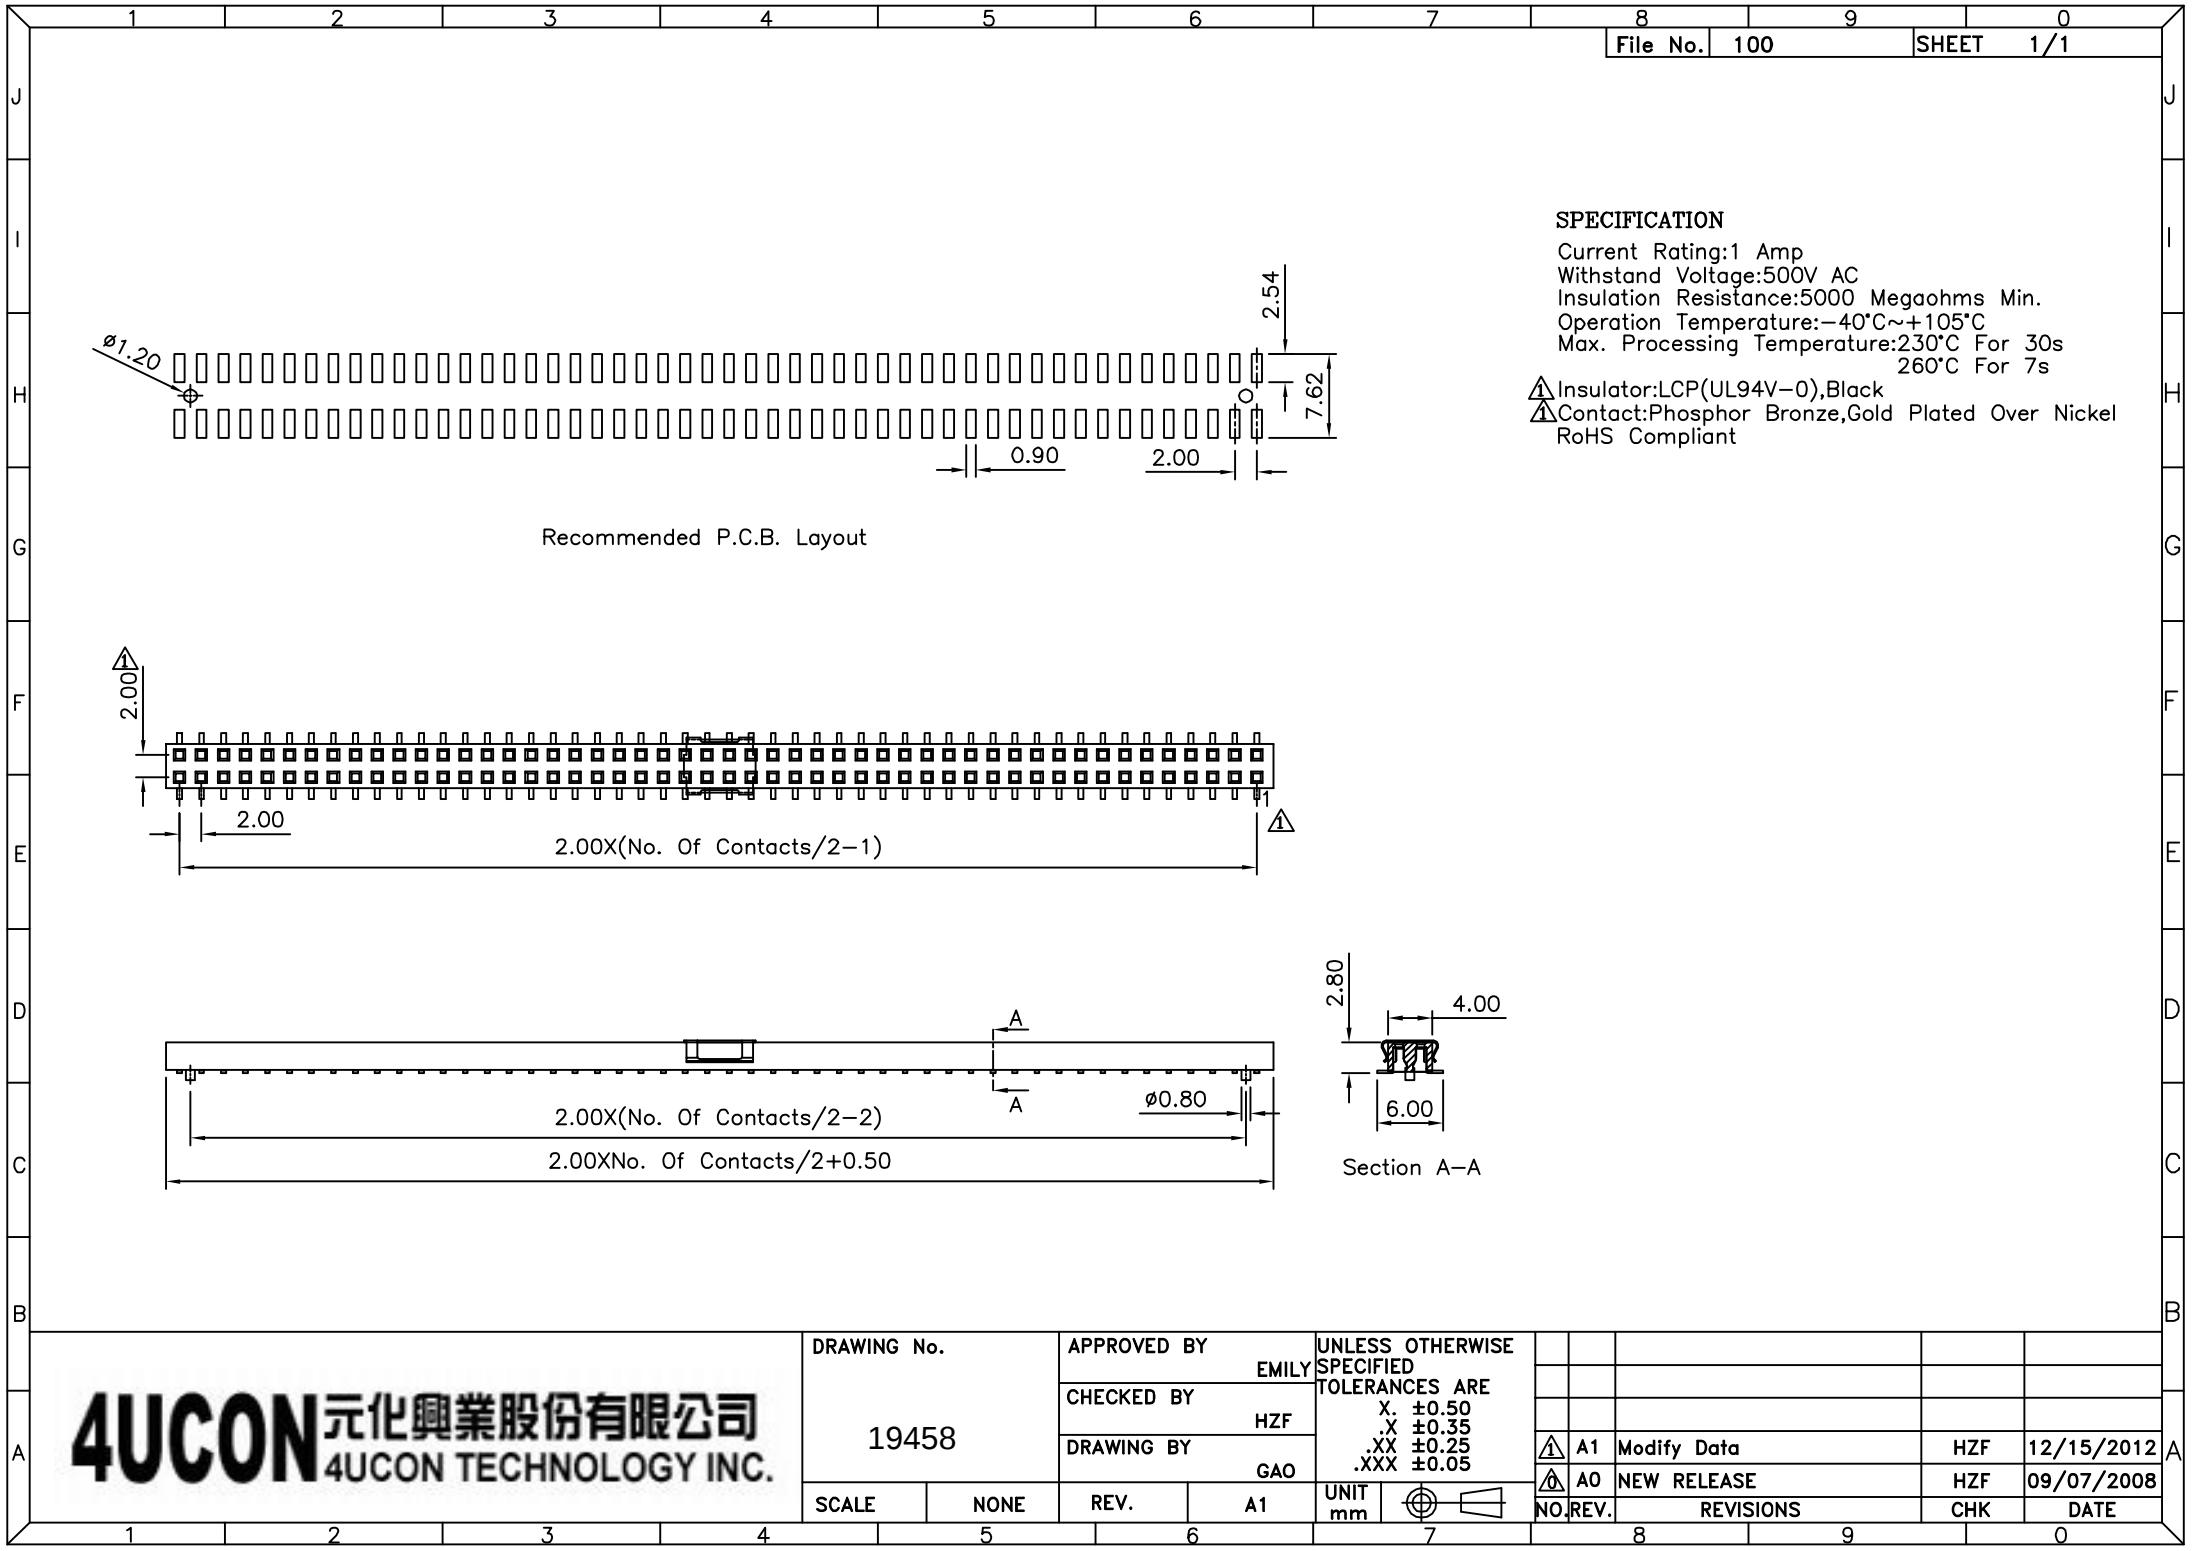


SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Max. Processing Temperature:230°C For 30s
260°C For 7s

⚠ Insulator:LCP(UL94V-0),Black
⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

Recommended P.C.B. Layout

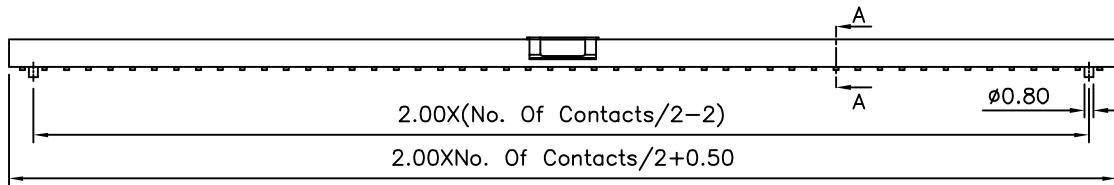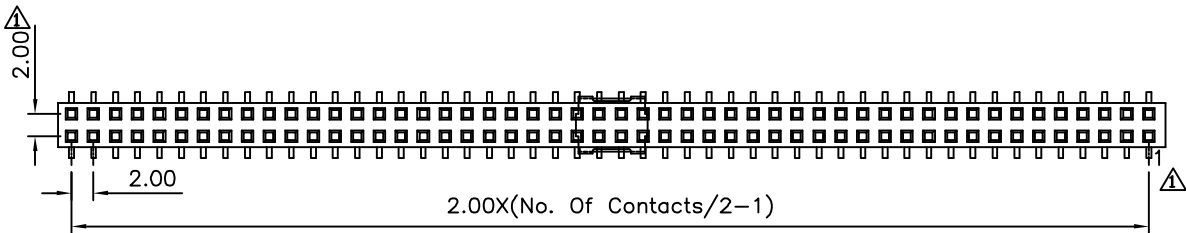

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19458

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.35
.XX ±0.25
.XXX ±0.05

SCALE

NONE

REV.

A1

UNIT

mm

NO.

REV.

REVISIONS

CHK

DATE