
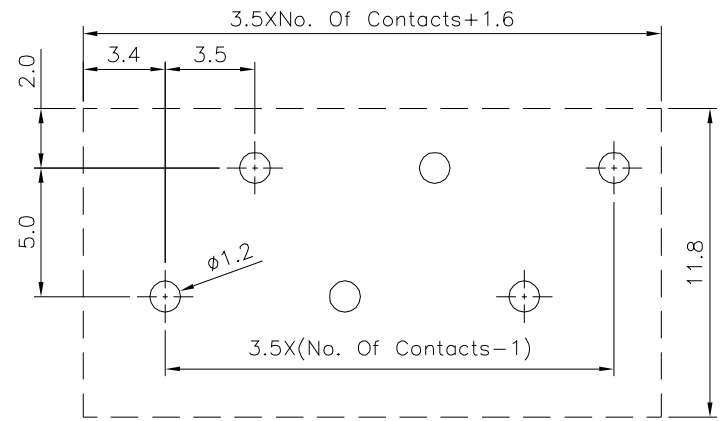


SPECIFICATION


Current Rating:5 Amp/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Withsanding Voltage:2500V AC(1 Minute)
 Test Time=60s/1 PCS
 Wire Range:16~20 AWG
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:
 250°C±10°C/5s Max.
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Gray
 Surface Of Solder Tails:Copper Alloy,Tin Plated
 RoHS Compliant

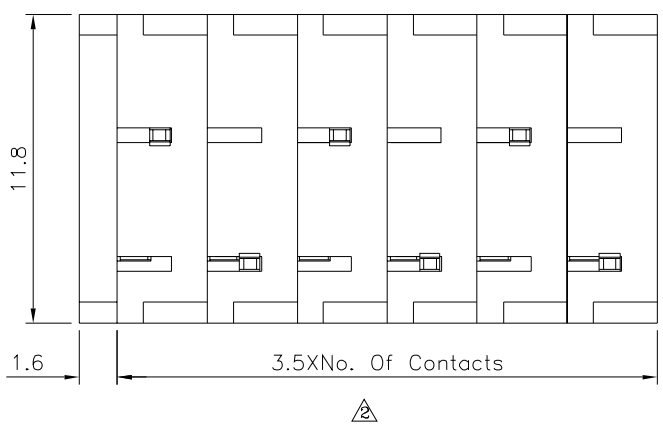

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°	A4	Modify Data	HZF	05/21/2015
19459		EMILY			A3	Modify Data	HZF	01/16/2014
		CHECKED BY			A2	Modify Data	HZF	07/20/2013
		HAO		A1	Modify Data	HZF	03/01/2011	
		DRAWING BY		A0	NEW RELEASE	HZF	01/15/2010	
SCALE	NONE	REV.	A4	UNIT	NO. REV.		REVISIONS	CHK DATE
				mm				



NO. REV.	REVISIONS	CHK	DATE