
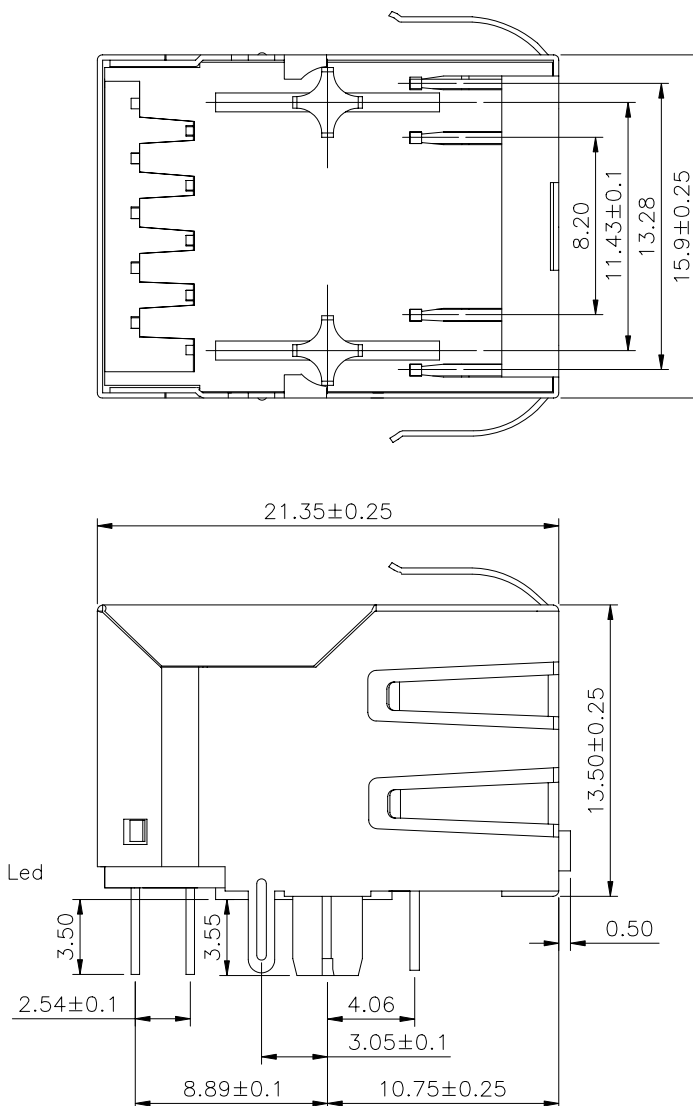


Code	Forward	Reverse
X	Without LED	
G	Green	—
Y	Yellow	—
R	Red	—
A	Green	Red
C	Green	Yellow(Amber)
D	Yellow	Red
E	Yellow	Green
F	Red	Green
H	Red	Yellow
I	Beige	—
J	Green	Orange
K	Black	—
L	Lime	—
M	Orange	Green

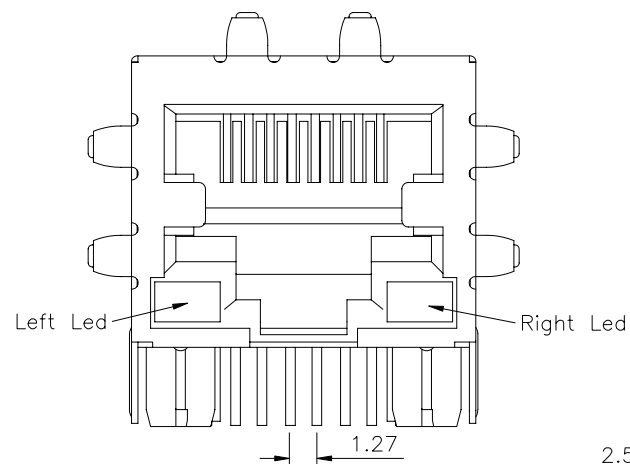

SPECIFICATION

Housing:Thermoplastic UL94V-0

Contact:Copper Alloy

Selective Gold Plated 6u" In Contact Area

Shield:Copper Alloy,Nickel Plated


Pin Not Electrically Connected Maybe Omitted See

Electrical Drawing For Omitted Pins

Tolerances Comply With F.C.C Dimension Requirements

Wave Solder Compatible—Preheat 125°C/90Secs

RoHS Compliant

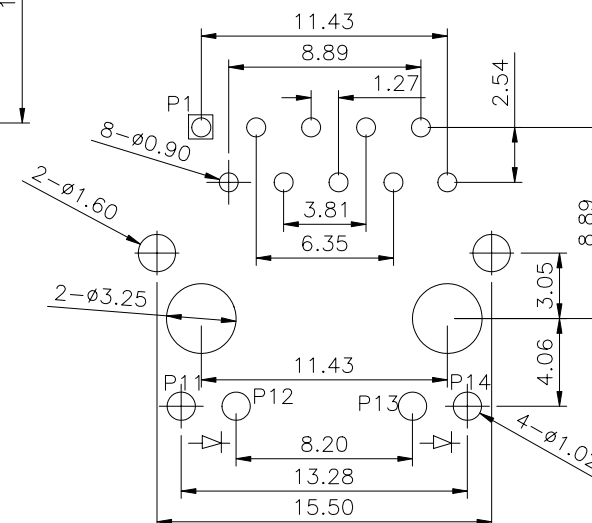

Recommended P.C.B Layout Seen From Component Side

All Centerline Dimensions Are Basic

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19518

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HYY


REV.

BO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.XX ±0.10

UNIT
mm



NO. REV.

BO NEW RELEASE
REVISIONS

HZF
CHK

04/23/2009
DATE

