

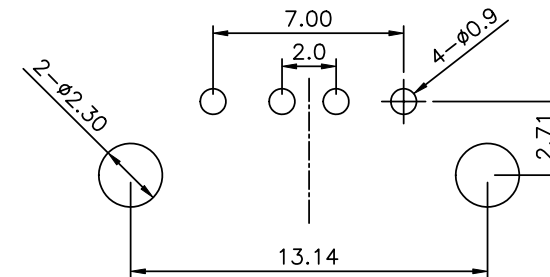
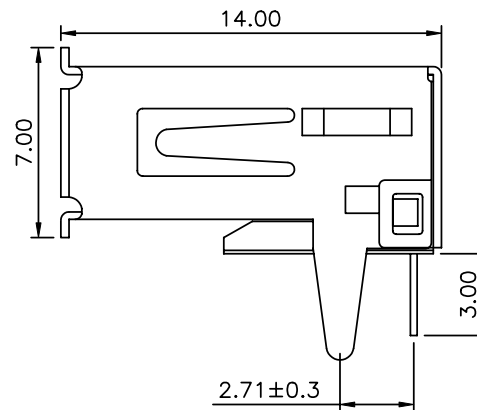


# SPECIFICATION

Dielectric Withstanding Voltage:500V AC At Sea Level  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Mating Force:3.5Kg Max.  
 Unmating Force:0.7Kg Min.  
 RoHS Compliant

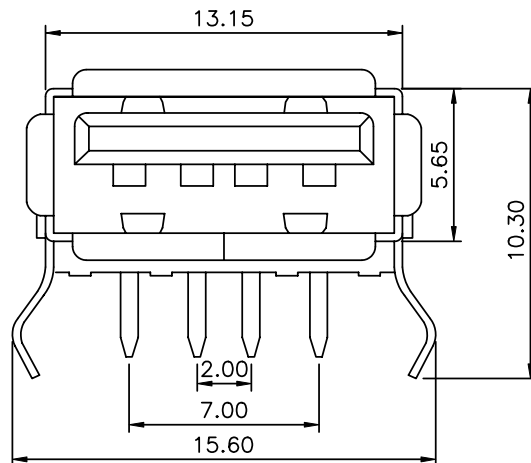

PCB Layout

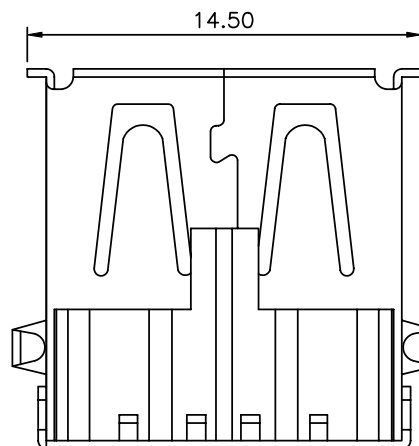

3	Housing	PBT	1	UL94V-0,Black
2	Shell	Brass	1	Nickel Plated
1	Terminal	Brass	4	Gold Plated In Mating Area Tin Plated On Solder Tails
No	Parts	Material	Q'ty	Finishing

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

19609

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

PEGA

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE  
 .X ±0.35  
 .XX ±0.25  
 .XXX ±0.15  
 ANG: ±2.00°

UNIT  
 mm



△

BO

NEW RELEASE

HZF

02/14/2009

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

BO