

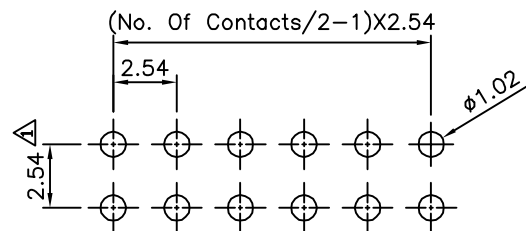



SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 ⚠ Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 ⚠ Contact:Brass,Gold Flash Over Nickel
 ⚠ No. Of Contacts:04~80 Contacts
 RoHS Compliant

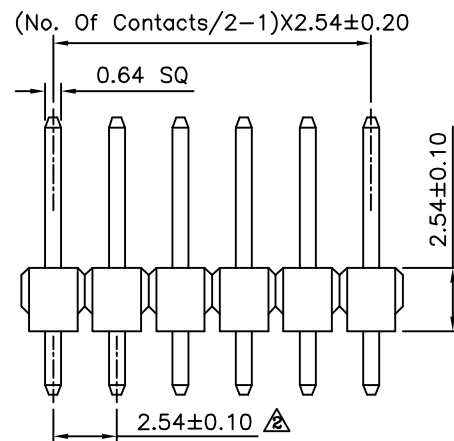

Recommended P.C.B Layout

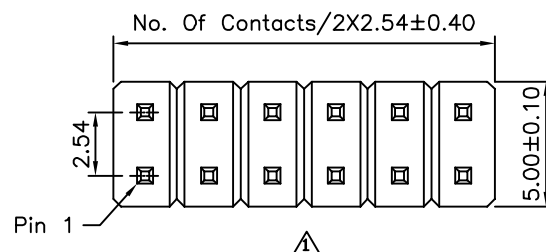

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19636

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



	A2	Modify Data	HZF	02/13/2014
	A1	Modify Data	HZF	12/04/2009
	A0	NEW RELEASE	SHIN	06/17/2007
NO	REV	REVISIONS	CHK	DATE