



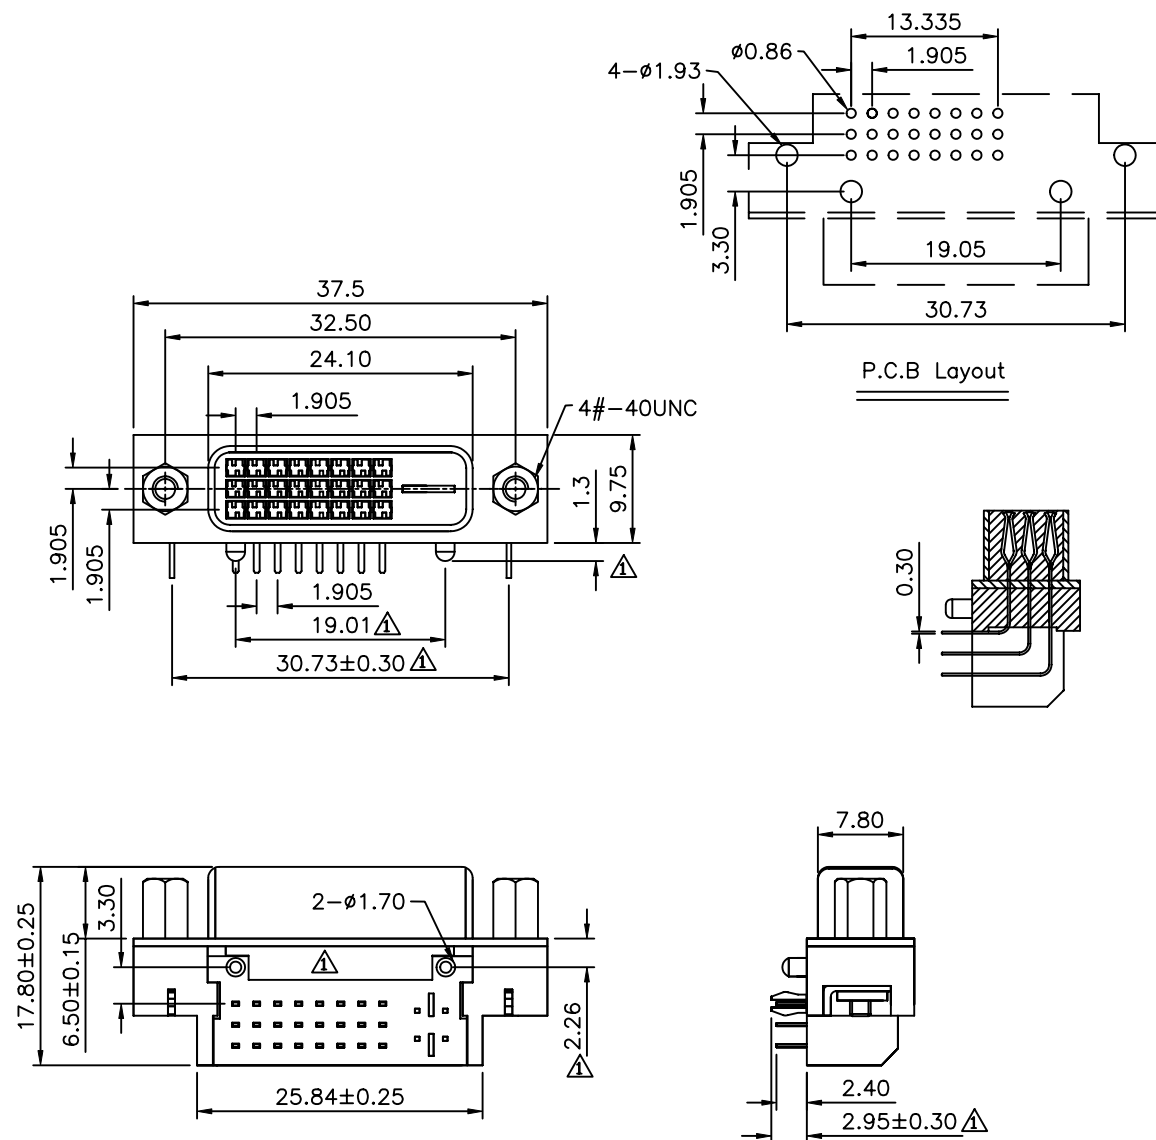

SPECIFICATION

Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:30 Milliohms Max.
 Dielectric Voltage:500V DC
 Temperature Range:-20°C~+85°C
 Housing:PBT+30%GF,White
 Cover:PA66+30%GF,White
 Contact:Bronze
 Gold Plated On Contact Area
 Tin Plated on Solder Area
 Nickel UnderPlated
 Shell:SPCC,Nickel Plated Over Copper
 Boardlock:SPCC,Tin Plated
 Screw:Zinc Alloy
 RoHS Compliant

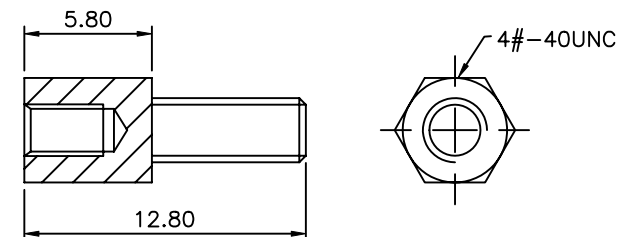

P/N	
09400	Without Screw
19637	With Jackscrew
09402	Front Jackscrew

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19637

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


XYH

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 .X ±0.20
 .XX ±0.15
 .XXX ±0.10
 ANG:

UNIT

mm



NO.

REV.

Modify Data

NEW RELEASE

REVISIONS

CHK

08/20/2009

02/22/2008

DATE

DATE