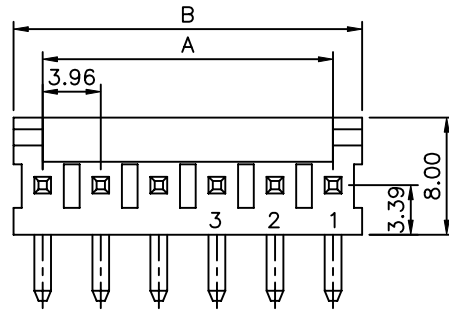


Recommended P.C.B. Layout

SPECIFICATION






Electrical Rating:UL 250V 4A,AC/DC

CSA 125V 5A,AC/DC

Contact:Brass,Gold Flash

Insulator:PA66 UL94V-2,White

RoHS Compliant

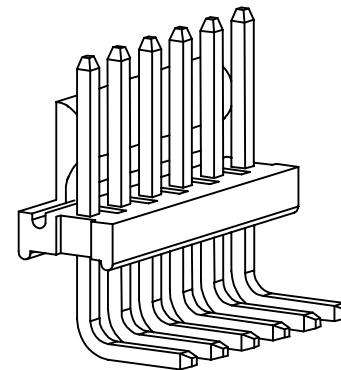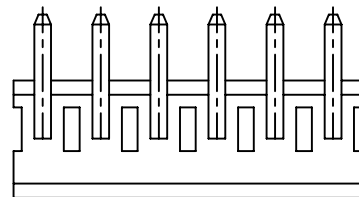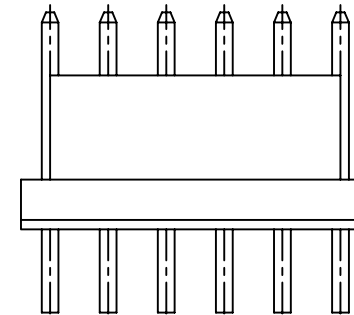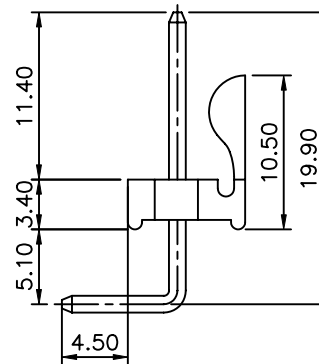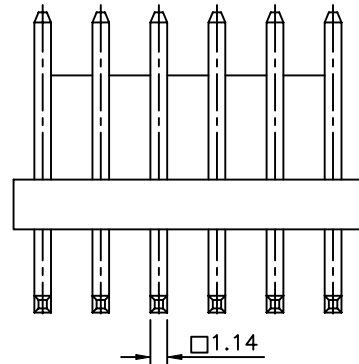

Circuits	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20
21	79.20	83.16
22	83.16	87.12
23	87.12	91.08
24	91.08	95.04
25	95.04	99.00
26	99.00	102.96
27	102.96	106.92
28	106.92	110.88

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19655

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.30

.XX ±0.20

.XXX ±0.10

ANG. ±2°

UNIT

mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

05/09/2009

SCALE

NONE

REV.

A0