

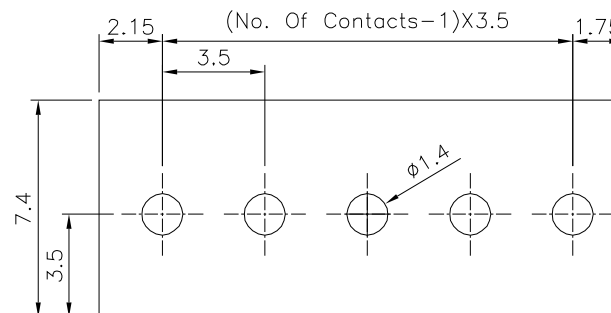
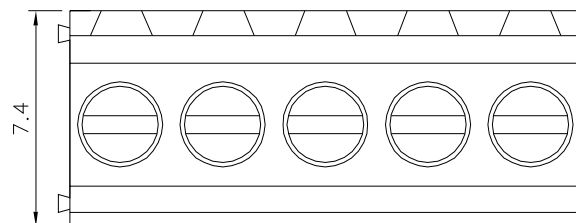


SPECIFICATION

Voltage Rating:300V AC
 Current Rating:10A/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC For 1 Minute
 Test Time=60 Sec./1 Pcs
 Wire Range:16~30AWG
 Torque:2 Kgf.cm/M2
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.
 Contact(Metal Housing):Copper Alloy,Nickel Plated
 Solder Pin:Copper Alloy,Tin Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Insulator Body(Housing):Polyamide(UL94V-0),Green
 RoHS Compliant

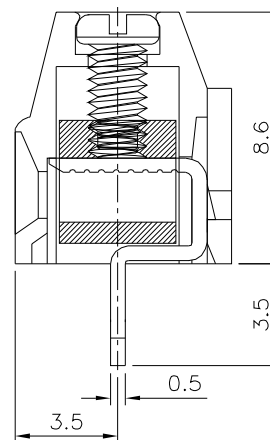

Recommended P.C.B. Layout

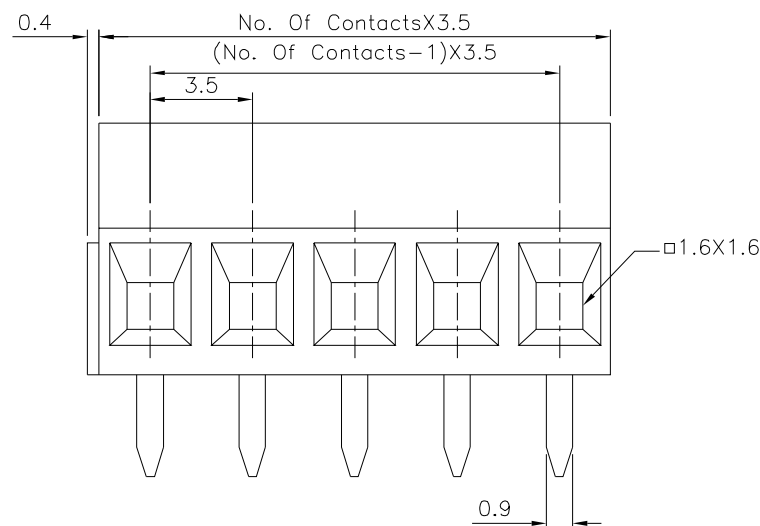

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 19711		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X. ±0.50 .X ±0.30 .XX ±0.20 X* ±1*						
		CHECKED BY HZF								
		DRAWING BY CYP								
		SCALE NONE								
REV.		BO		UNIT mm		NO.	REV.	REVISIONS	CHK	DATE
						△	BO	Modify Data	HZF	09/21/2023
						△	BO	NEW RELEASE	HZF	09/21/2023