

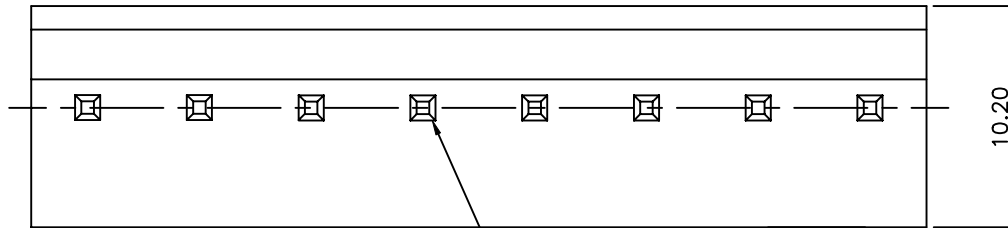


Recommended P.C.B. Layout

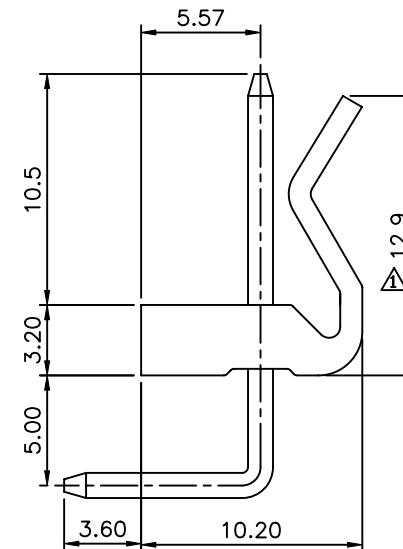

1.14 SQ

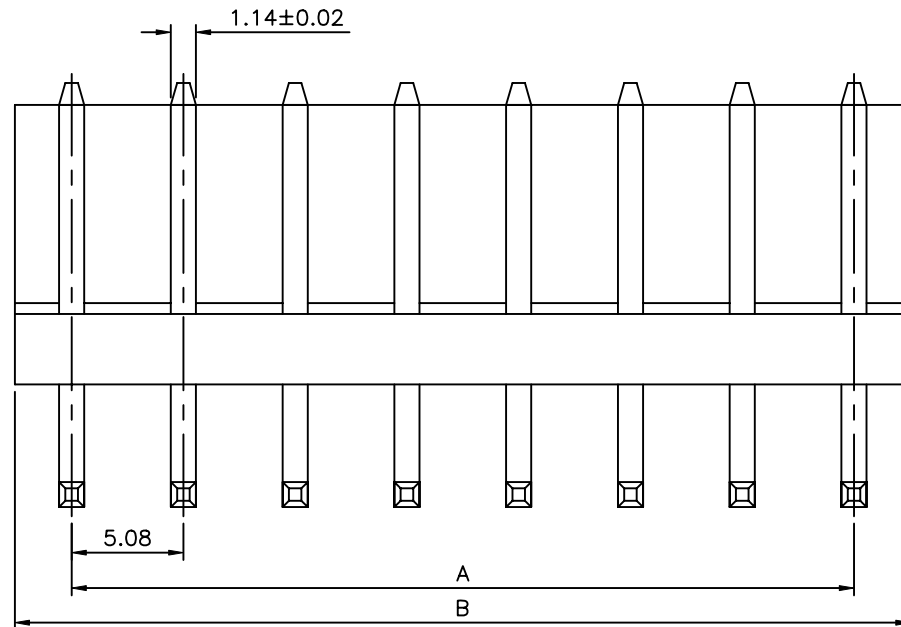

△ SPECIFICATION

Voltage Rating:250V(AC)
Current Rating:7A
Contact Resistance:20 Milliohms Max.
Dielectric Withstanding Voltage:1500V AC/1 Minute
Insulation Resistance:1000 Megaohms Min.
Insulator:PA66(UL94V-2),Natural
Contact:Brass,Tin Plated
Temperature Range:-25°C~+85°C
RoHS Compliant

△ Pin	A	B
2	5.08	10.22
3	10.16	15.30
4	15.24	20.38
5	20.32	25.46
6	25.40	30.54
7	30.48	35.62
8	35.56	40.70
9	40.64	45.78
10	45.72	50.86
12	55.88	60.96

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19719

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.5

.XX ±0.3

UNIT
mm



△ A1

Modify Data

HZF

03/17/2011

△ A0

NEW RELEASE

BECKY

NO. REV.

REVISIONS

CHK

DATE