
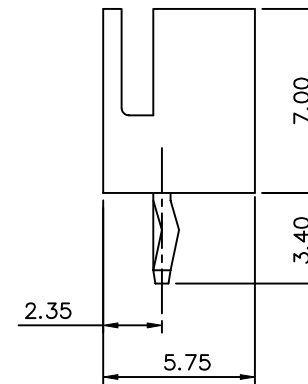
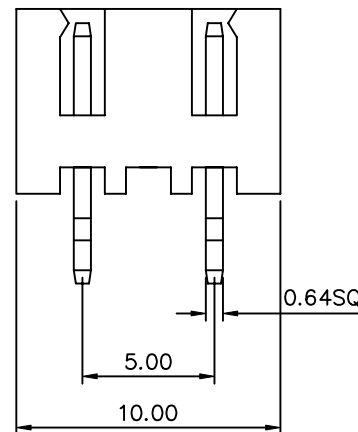


SPECIFICATION

Current Rating: 3A AC/DC
 Voltage Rating: 250V AC Max.
 Operation Temperature: -25°C To +85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Contact: Brass, Tin Plated
 Insulator: PA66 UL94V-0, White
 RoHS Compliant

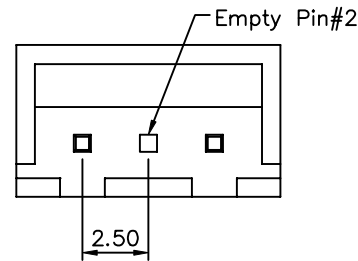

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19730

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QJJ

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.35

.XX ±0.25

SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

A0

NEW RELEASE

REVISIONS

CHK

HZF

08/09/2009

DATE