


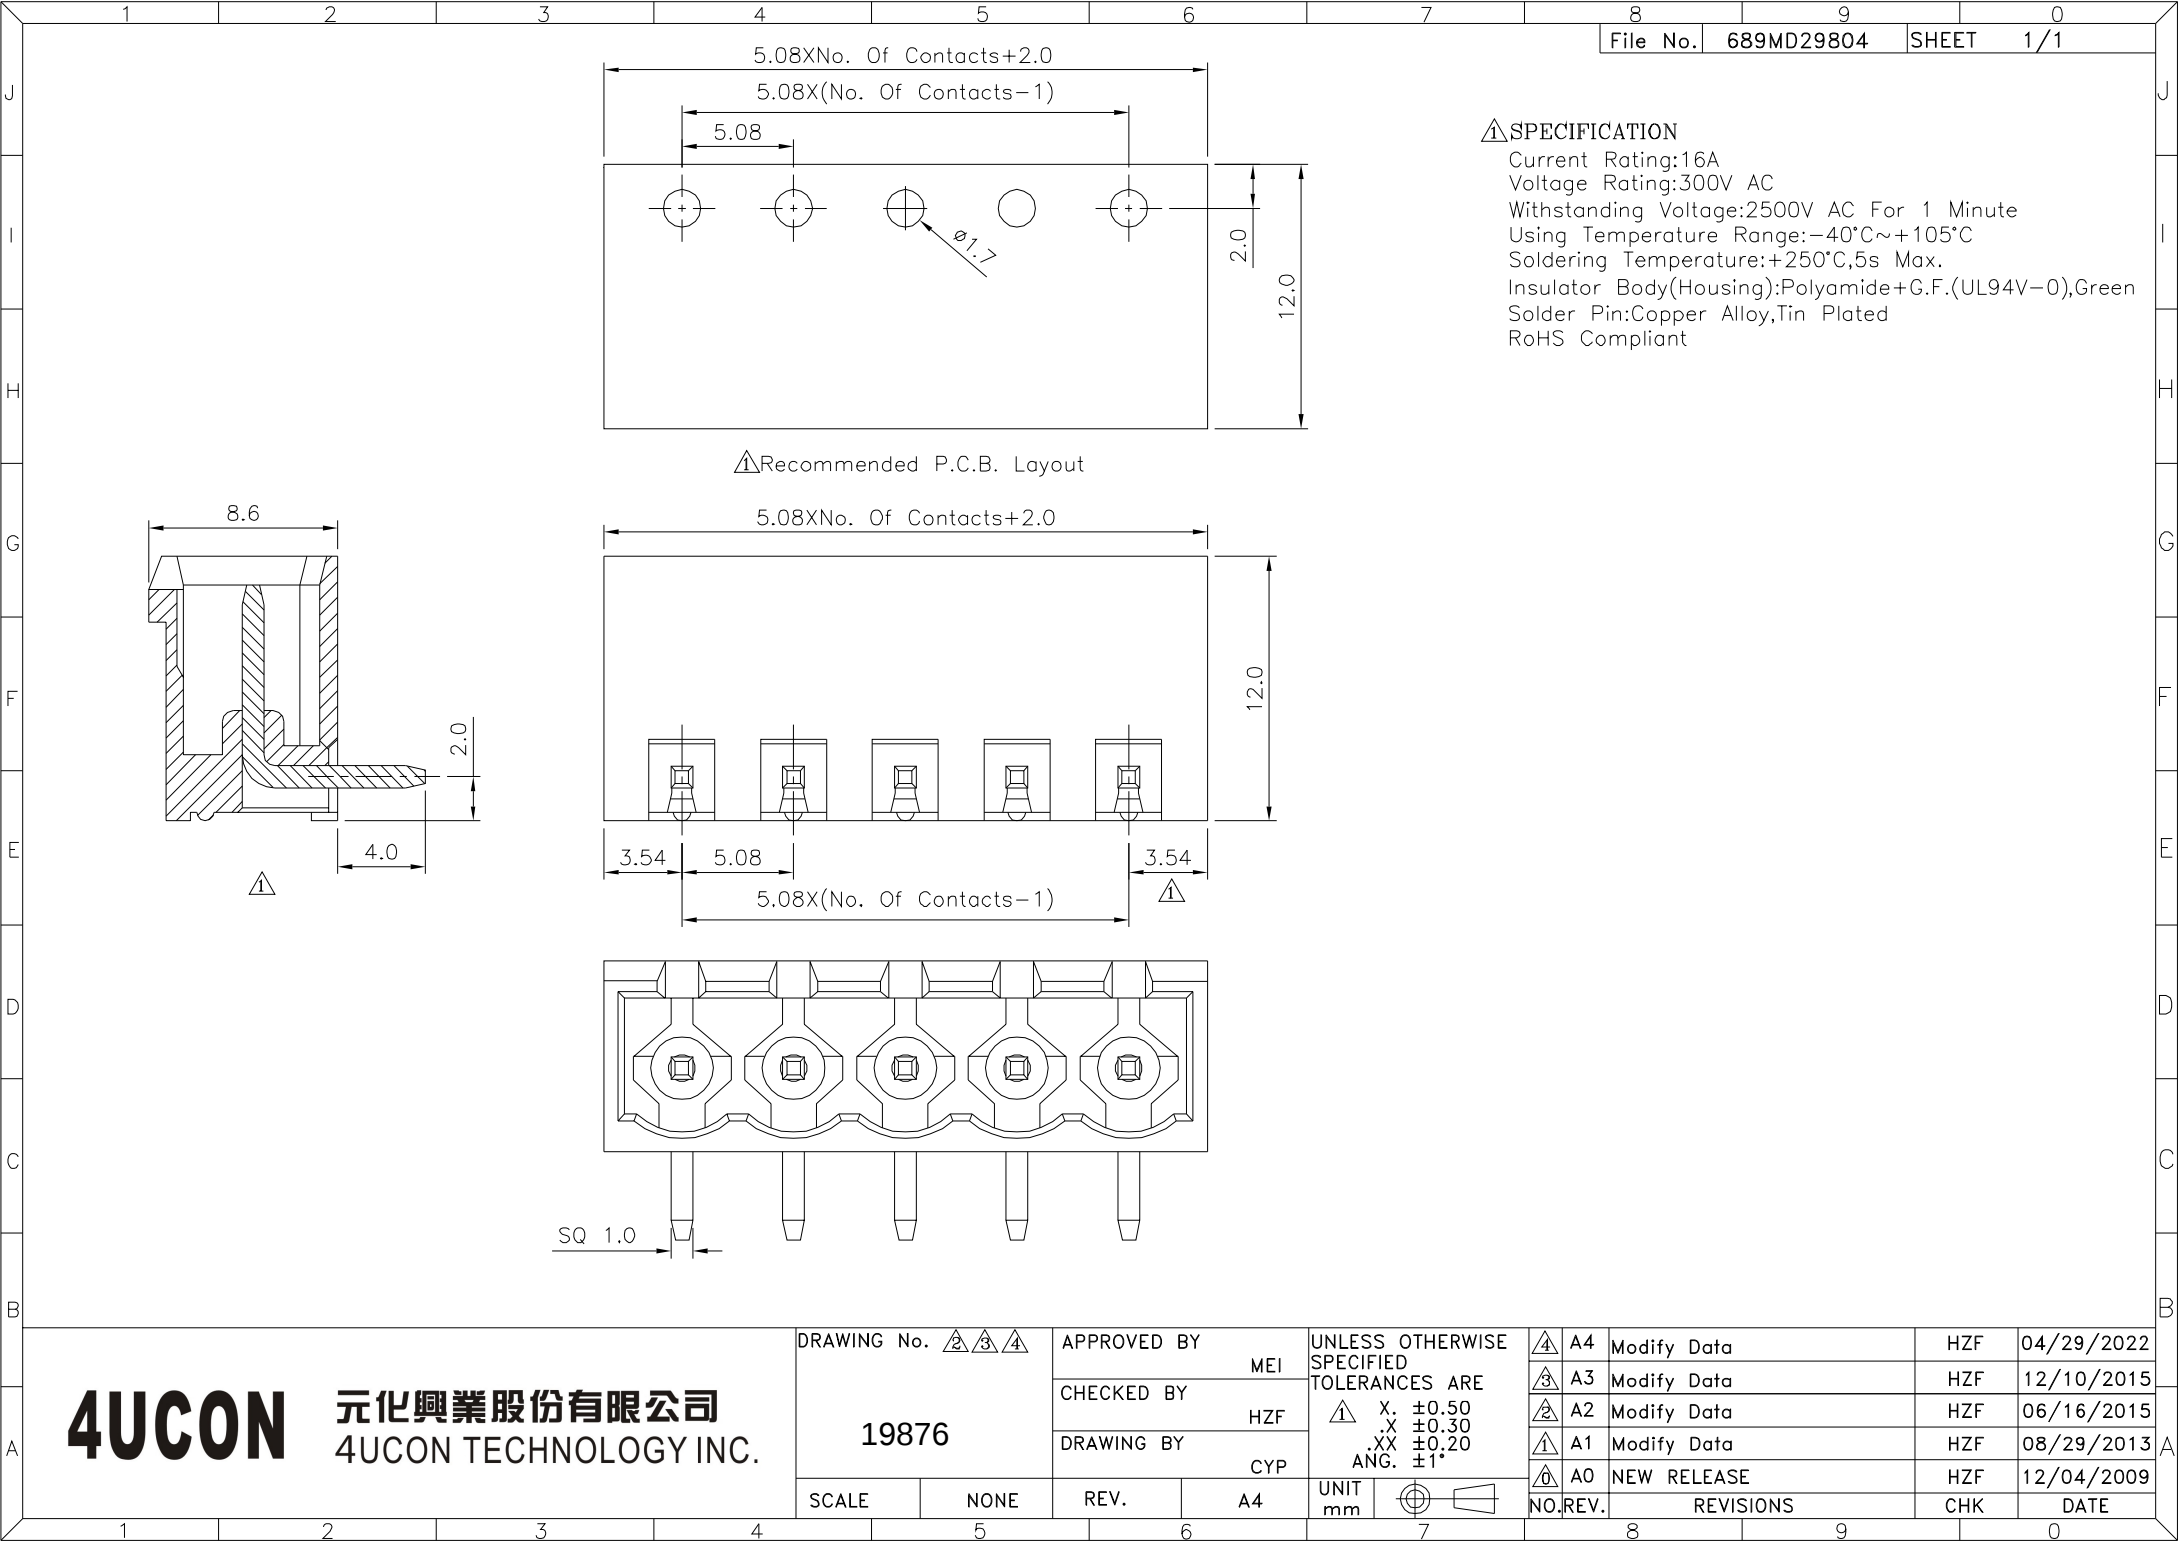

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

DRAWING No. △ △ △ 19876		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°	△ A4	Modify Data	HZF	04/29/2022	
		CHECKED BY HZF			△ A3	Modify Data	HZF	12/10/2015	
		DRAWING BY CYP			△ A2	Modify Data	HZF	06/16/2015	
SCALE NONE	REV. A4	UNIT mm		NO. REV.	△ A1	Modify Data	HZF	08/29/2013	
					△ A0	NEW RELEASE	HZF	12/04/2009	
				REVISIONS	CHK	DATE			