
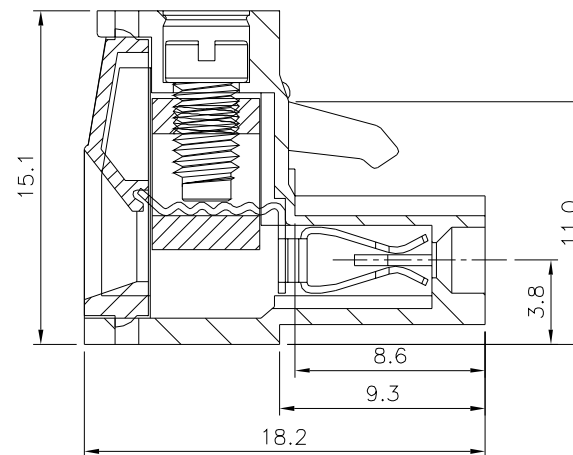
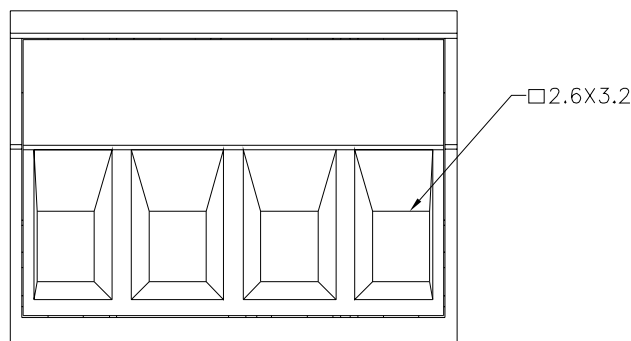


SPECIFICATION

Current Rating:16A/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Operation Temperature:-40°C~+105°C
Wire Range:12~26 AWG
Torque:5.0 Kgf.cm/M3
Insulator Body:Polyamide(UL94V-0),Green
Contact:Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
RoHS Compliant

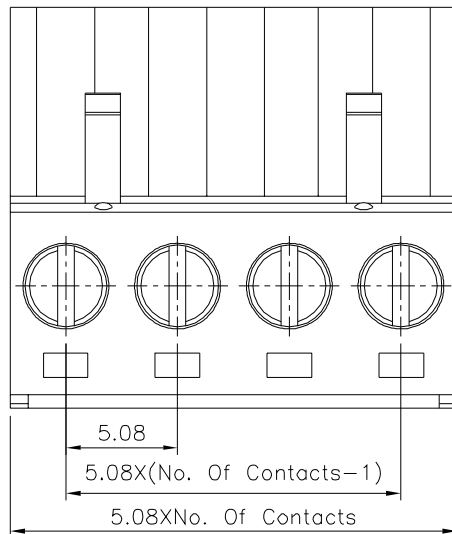

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19878

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY


Michelle Lee

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm



NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NEW RELEASE

REVISIONS

HZF

CHK

07/25/2024

DATE