


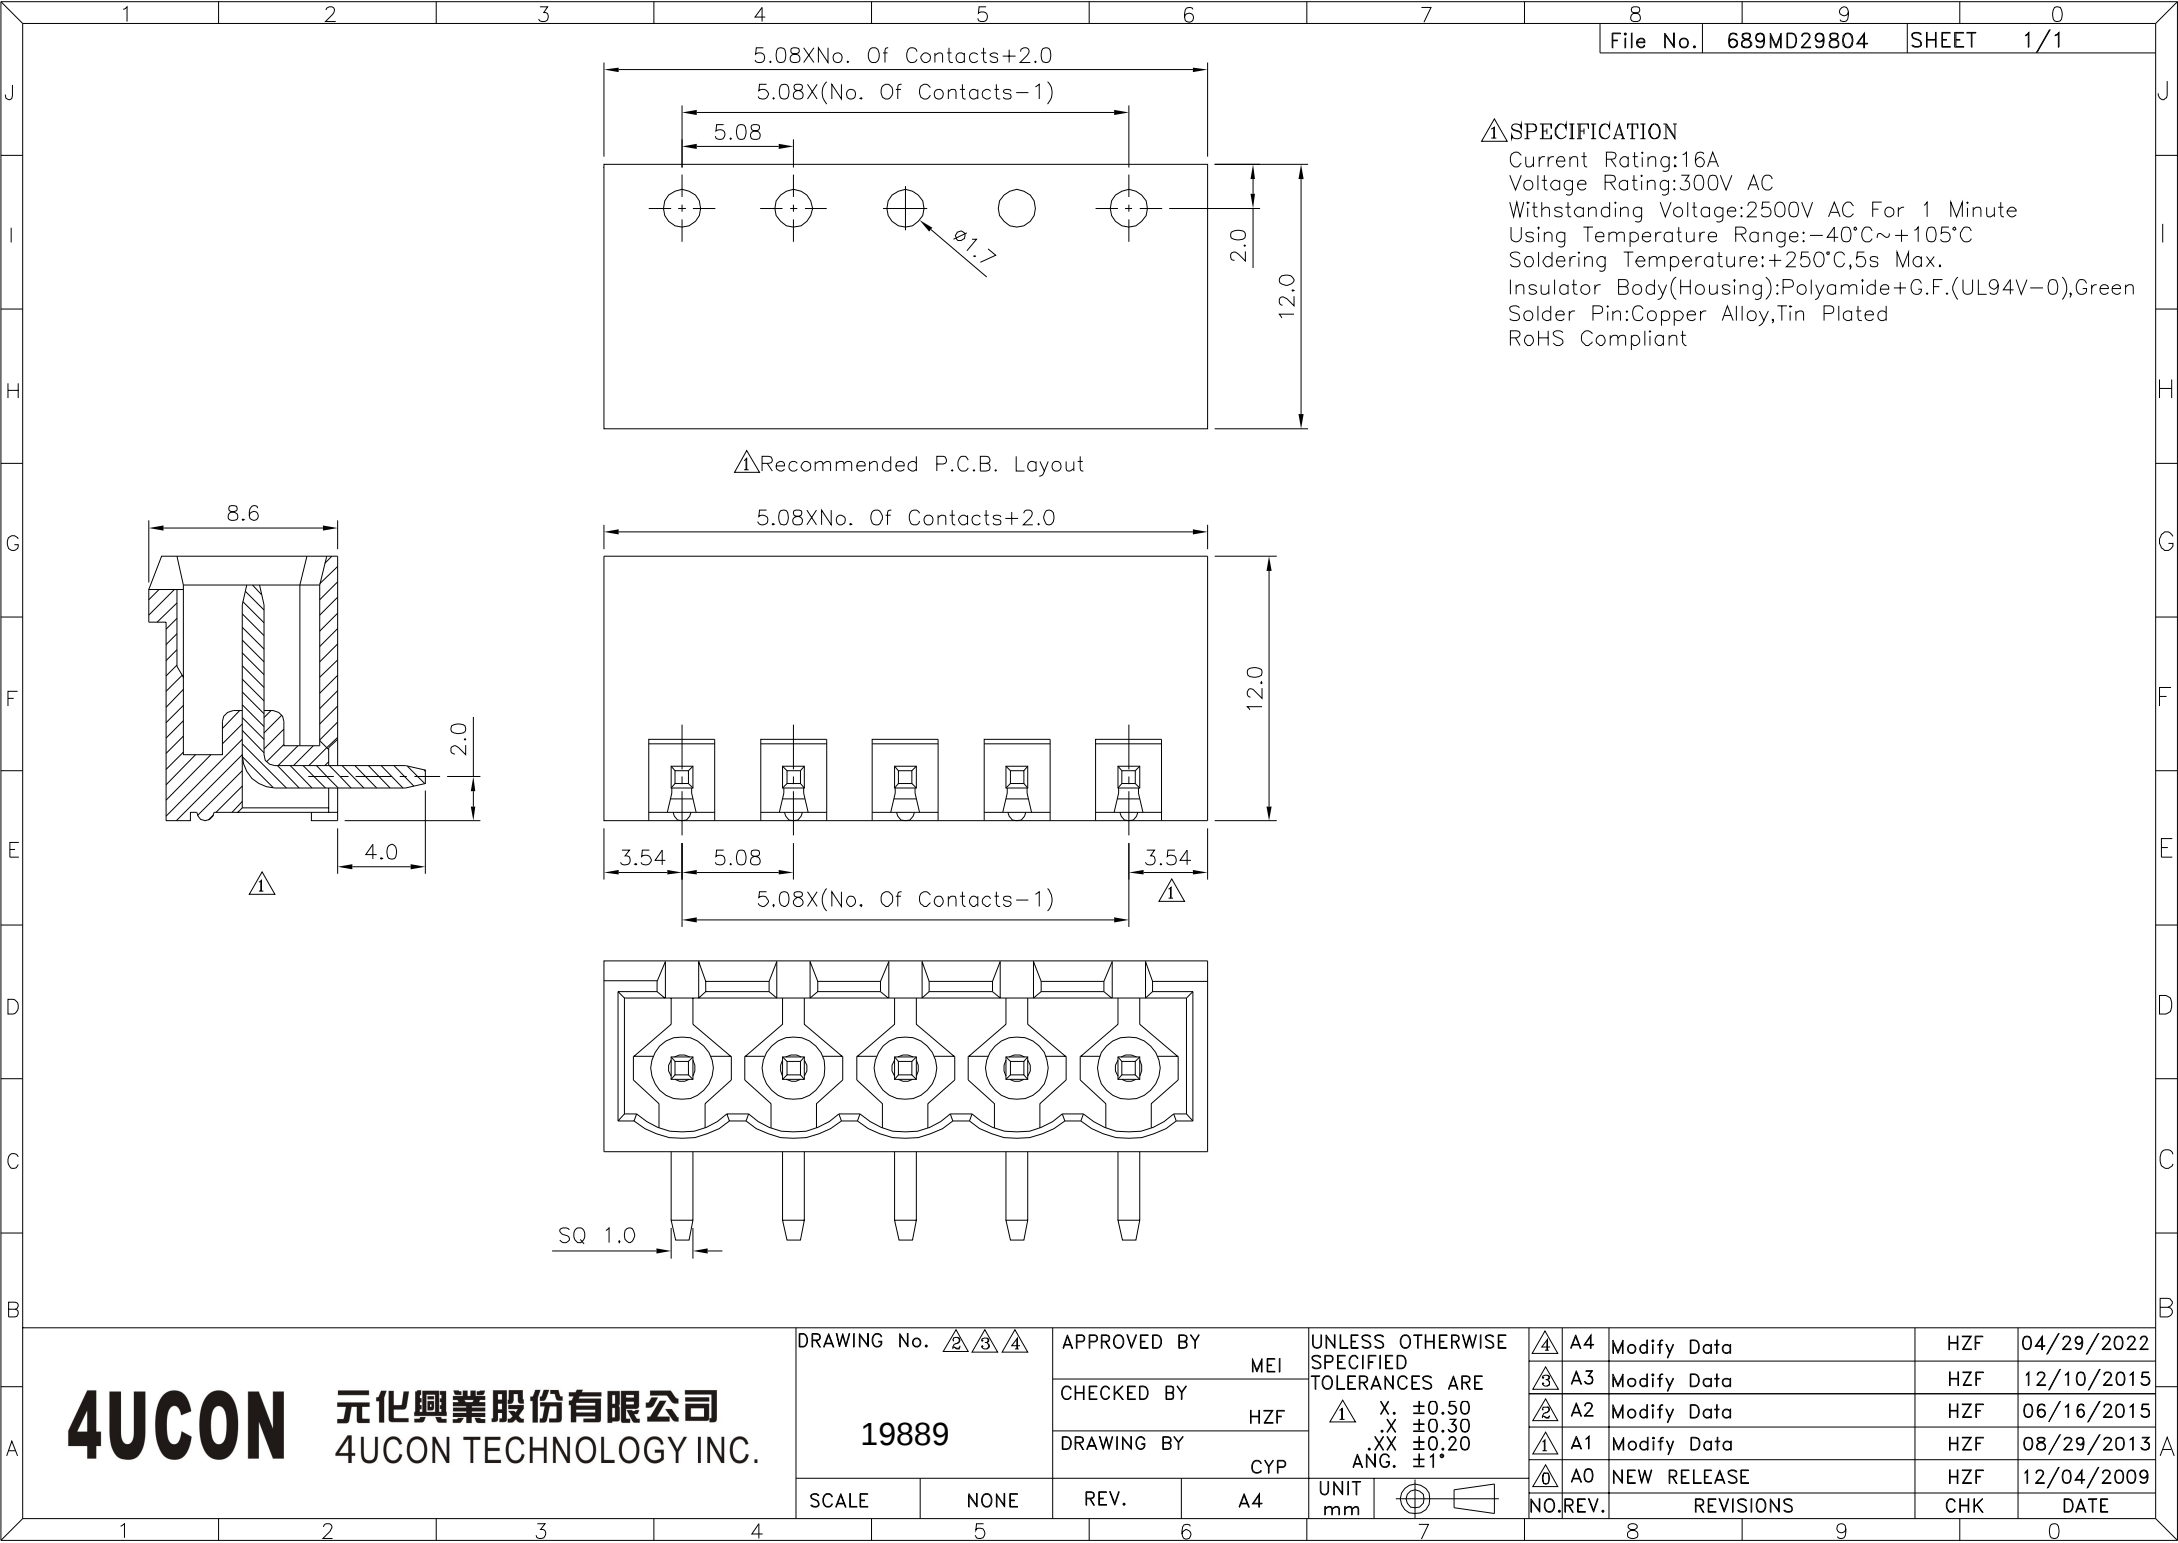

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

△ Recommended P.C.B. Layout

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. **△ 2 △ 3 △ 4**
19889
SCALE NONE

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP
REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△ X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$
UNIT mm

△ 4	A4	Modify Data	HZF	04/29/2022
△ 3	A3	Modify Data	HZF	12/10/2015
△ 2	A2	Modify Data	HZF	06/16/2015
△ 1	A1	Modify Data	HZF	08/29/2013
△ 0	A0	NEW RELEASE	HZF	12/04/2009
NO. REV.	REVISIONS		CHK	DATE