

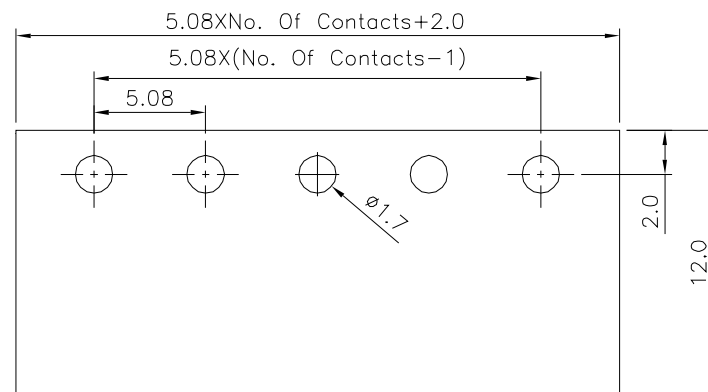
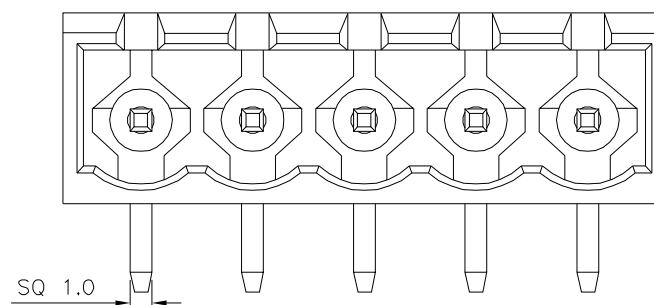


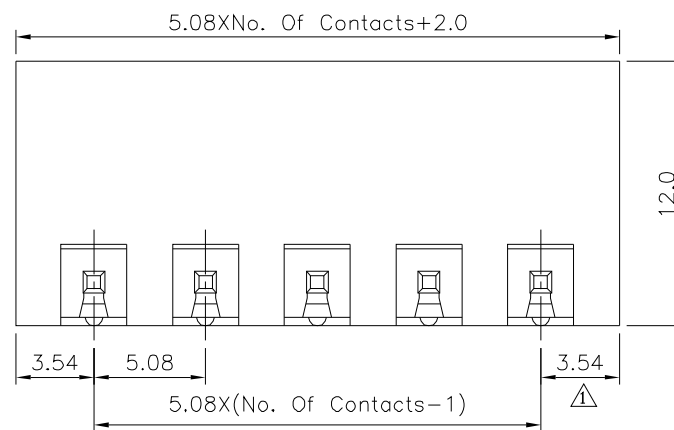

1 SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

① Recommended P.C.B. Layout

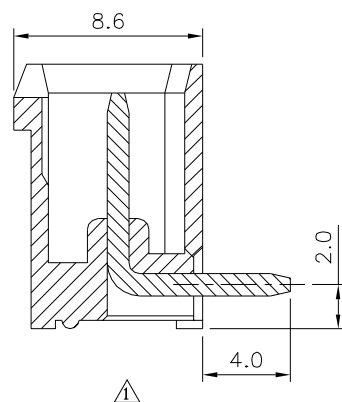

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 2 3 4

19891

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\triangle 1$	X.	± 0.50
	.X	± 0.30
	.XX	± 0.20
	ANG.	$\pm 1^\circ$

	UNIT
	mm



		A4
--	---	----

4	Modify Data
---	-------------

HZF

04/29/2022

	A3
---	----

	Modify Data
3	Modify Data

H7F

12/10/2015

$\triangle 3$	A3
$\triangle 2$	A2

2	Modify Data
---	-------------

H7F

12/16/2015	
06/16/2015	

$\triangleleft$	A2
$\triangleup$	A1

	Modify Data
1	Modify Data

H7F

00/10/2013
08/29/2013

	A1
	A0

	Monthly Data
D	NEW RELEASES

H7E

08/29/2013
13/04/2008

NO.	REV.
-----	------

NEW RELEASE
REVIEW

ПЗГ
CHK

12/04/2009
DATE