
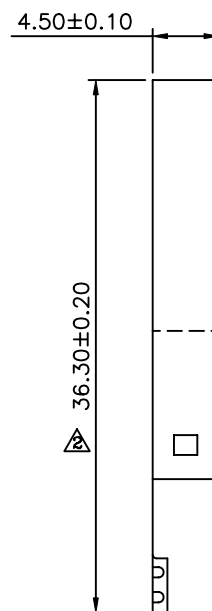
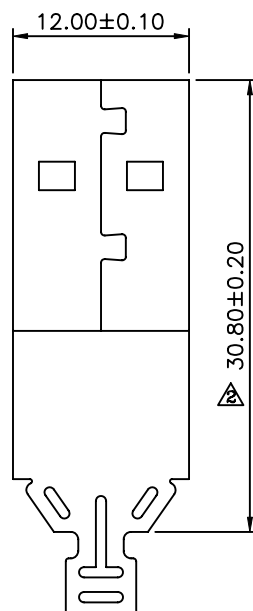
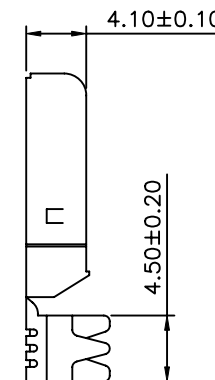
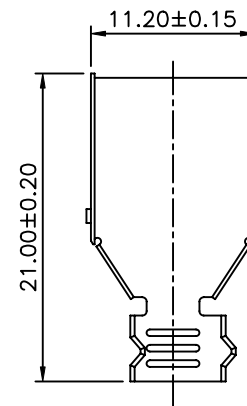
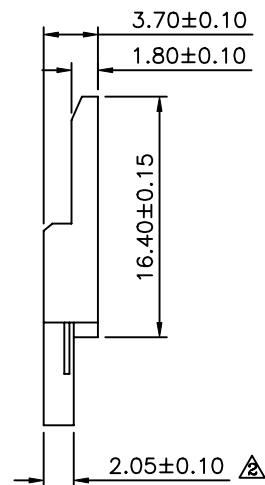


SPECIFICATION

Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 500V DC
Temperature Range:-55°C~+105°C
RoHS Compliant

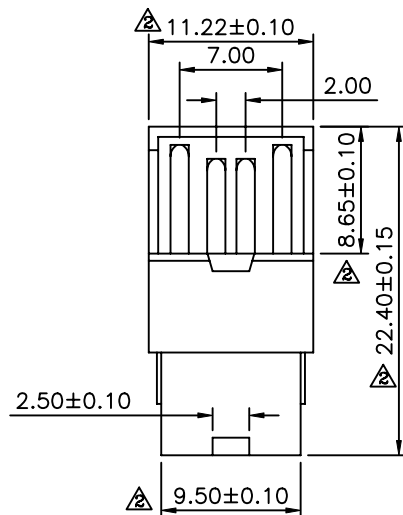

No.	Name	Q'ty	Material	Finish
1	Housing	2	PBT,UL94V-0	Black
2	Contact	4	Brass	Gold Flash
3	Front Shell	1	Cold Rolled Steel	Nickel Plated
4	Back Shell	1	Cold Rolled Steel	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19991

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

QQJ

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

UNIT
mm



SCALE

NONE

REV.

A3

NO. REV.

REVISIONS

CHK

DATE

A3	Modify Data	HZF	09/29/2010
A2	Modify Data	HZF	05/12/2009
A1	Modify Data	BECKY	06/07/2005
A0	NEW RELEASE	RAN	