




Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

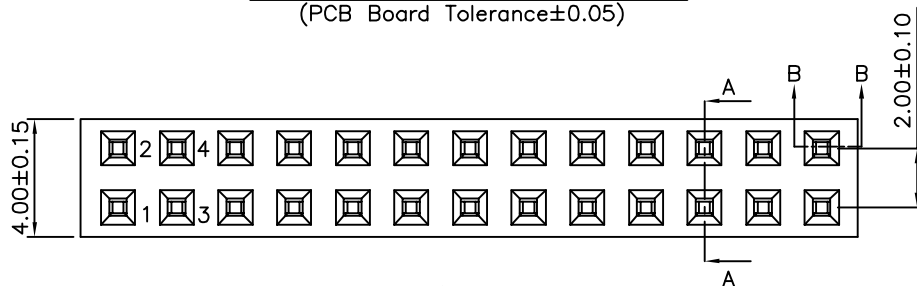

△

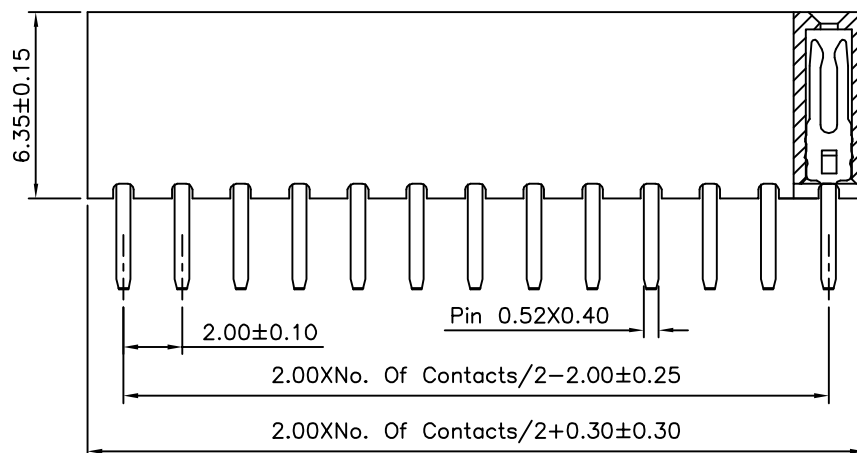

△ Section B-B



Section A-A

SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20022

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

12/28/2012

△ A0

NEW RELEASE

HZF

07/15/2008