

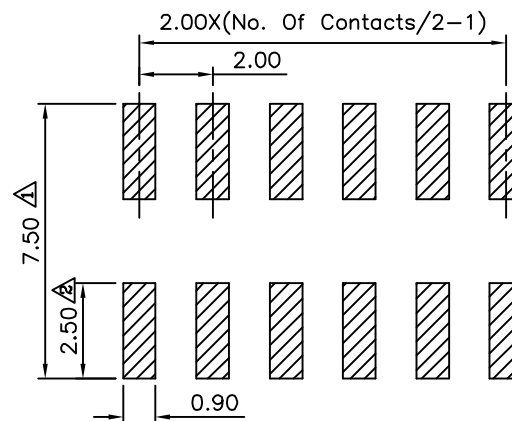
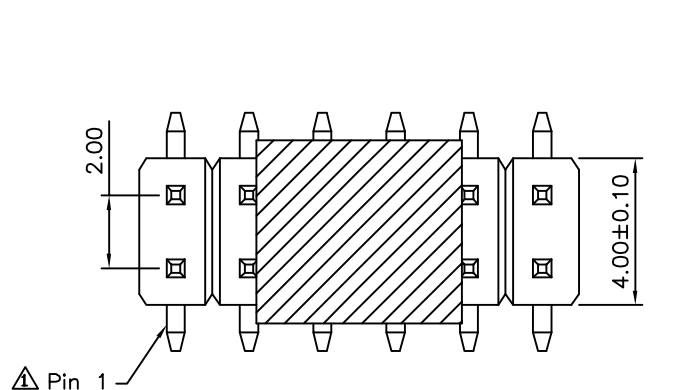


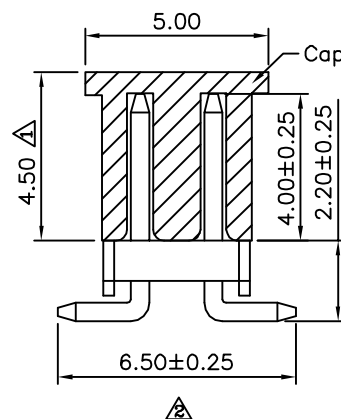

Recommended P.C.B. Layout

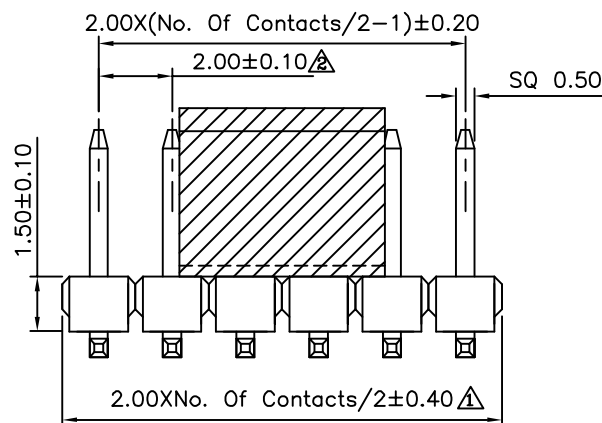

△ SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20038

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	01/26/2013
△ B1		Modify Data	HZF	10/20/2010
△ B0		NEW RELEASE	HZF	03/05/2009