
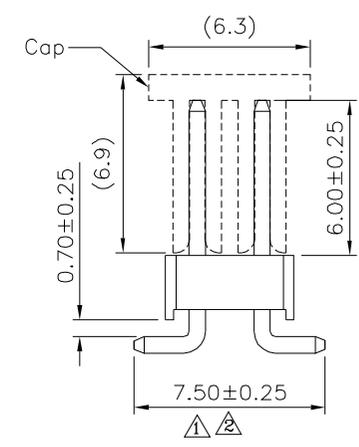
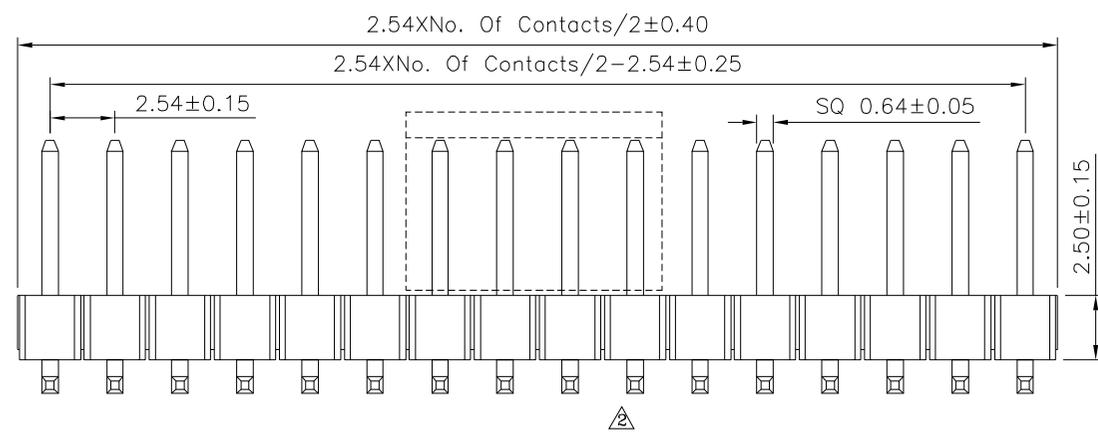


Recommended P.C.B. Layout
Tolerance: ±0.05

- △ SPECIFICATION**
- Current Rating: 3.0A/Contacts Max.
 - △ Withstand Voltage: 1000V AC/Minute
 - Contact Resistance: 20 Milliohms Max./Contacts
 - Insulation Resistance: 1000 Megaohms Min.
 - Operating Temperature: -40°C ~ +105°C
 - △ Housing: PA6T(UL94V-0), Black
 - Contact: Brass, Gold Flash Over Nickel
 - RoHS Compliant

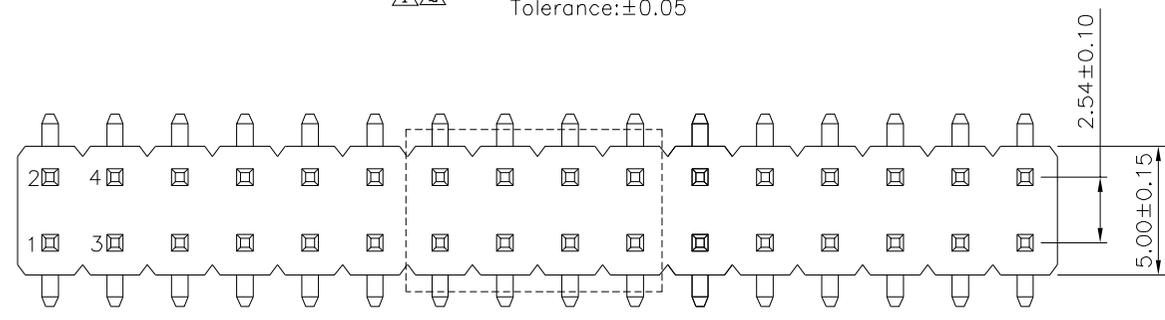

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| | | | |
|-------------|------|-------------|----|
| DRAWING No. | | APPROVED BY | |
| 20039 | | MEI | |
| | | CHECKED BY | |
| | | HZF | |
| DRAWING BY | | CYP | |
| SCALE | NONE | REV. | A1 |

| | | | |
|---|-------|-------------|----------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | | | |
| X. | ±0.50 | | |
| .X | ±0.40 | | |
| .XX | ±0.25 | | |
| .XXX | ±0.15 | | |
| ANG. | ±5° | | |
| UNIT | mm | | |
| NO. | REV. | REVISIONS | DATE |
| △ | A2 | Modify Data | HZF 12/22/2025 |
| △ | A1 | Modify Data | HZF 10/31/2014 |
| △ | A0 | NEW RELEASE | HZF 01/22/2016 |