

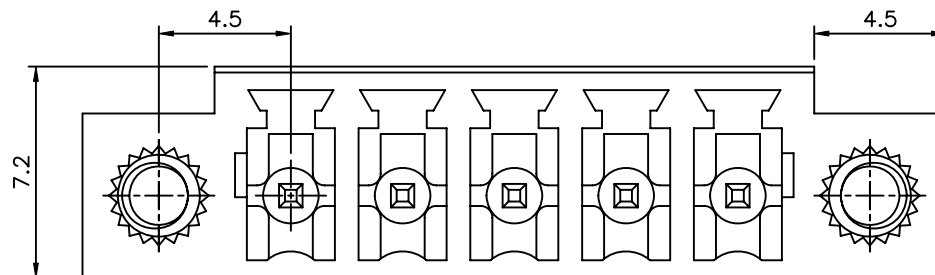


Recommended P.C.B. Layout

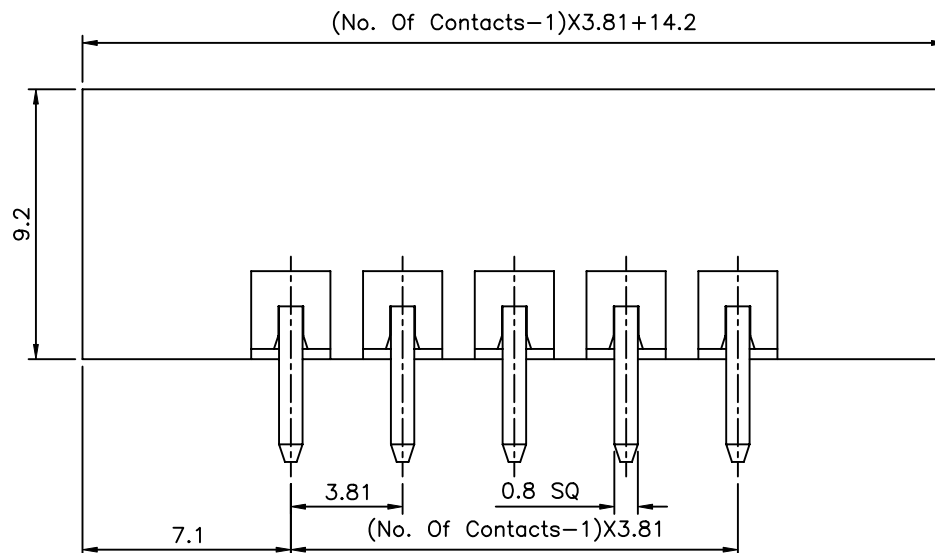

SPECIFICATION

Voltage Rating:250V AC
 Current Rating:8A
 Insulation Resistance:500 Megaohms At DC 500V
 Withstanding Voltage:1200V AC For 1 Minute
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5 Seconds Max.
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

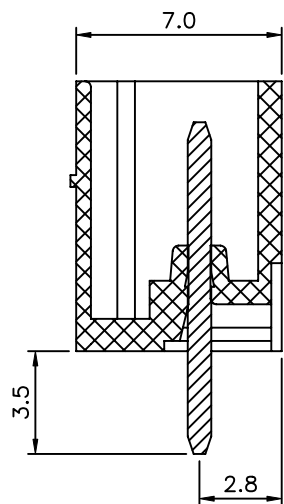

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20047

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X* ±1°


SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE