
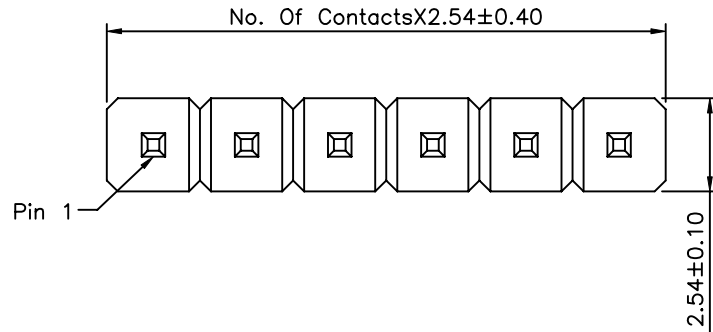
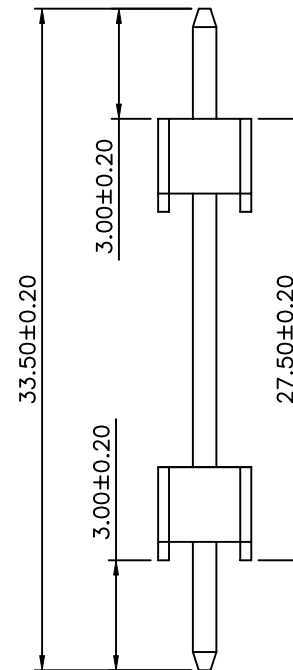


SPECIFICATION

Current:3A
 Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Housing:PBT(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contact:02~40 Contacts
 RoHS Compliant

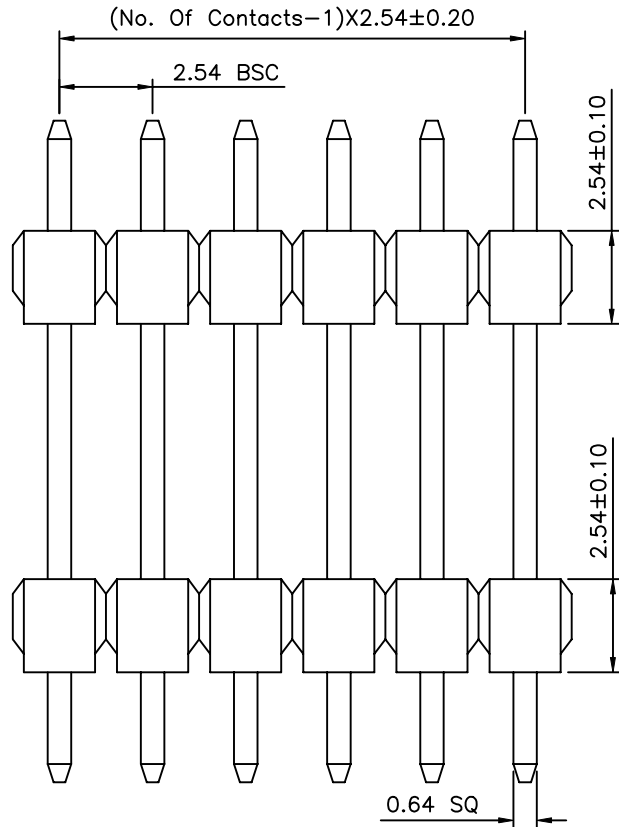

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20094

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^{\circ}$

SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

09/11/2010