

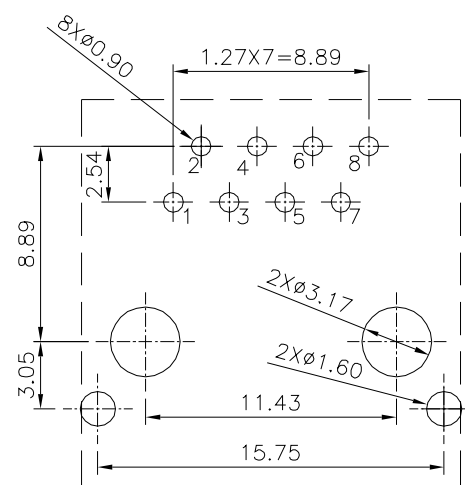
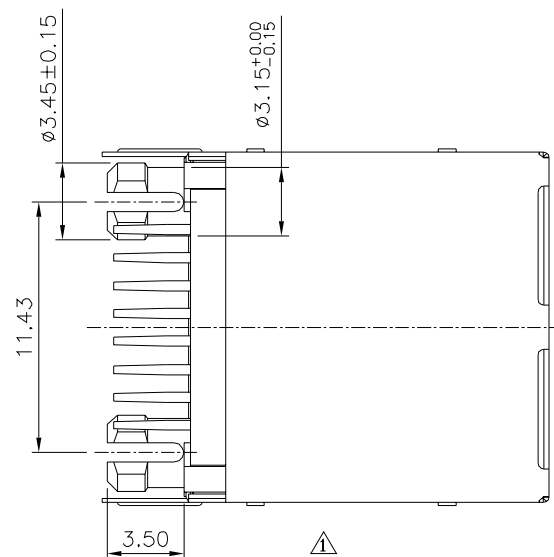
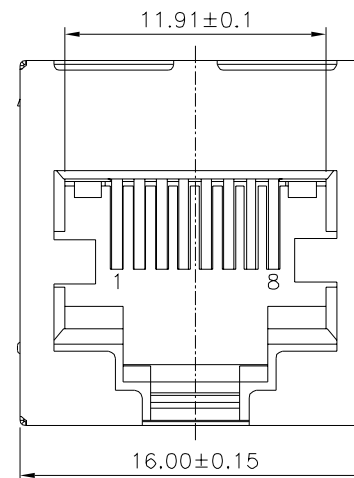


**△ SPECIFICATION**  
 Voltage Rating:125V AC RMS  
 Current Rating:1.5A  
 Dielectric Strength:1000V AC Or 1500V DC RMS  
 At 0.5mA 50Hz/60Hz For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 At 500V DC  
 Operation Temperature:-40°C~+85°C  
 Housing & Insert:PBT(UL94V-0),Black  
 Contact:Phosphor Bronze  
 Shield:Brass,Nickel Plated  
 Mates With Modular Plug Conforming To  
 FCC Part 68,Subpart F.  
 RoHS Compliant

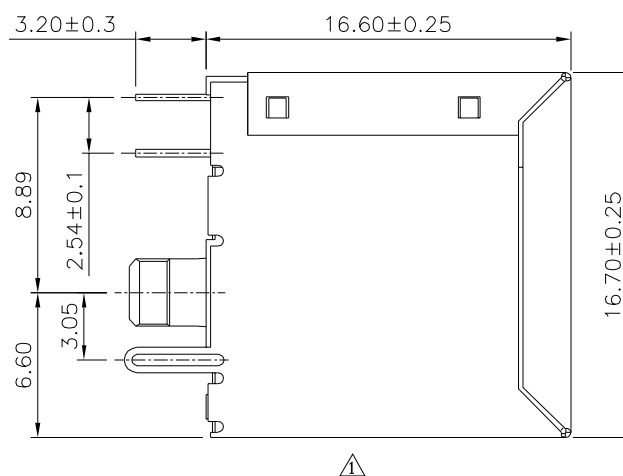

△ P.C.B. Layout Component Side  
 Tolerances±0.05(Thickness=1.6mm)

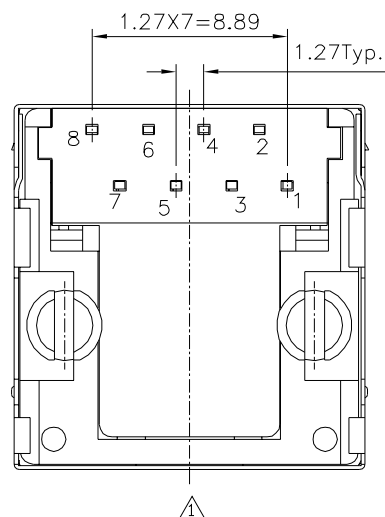

| Contact Finish                                                             | Item No. |
|----------------------------------------------------------------------------|----------|
| Gold Flash On Contact Area,Tin<br>Plated On Solder Tails,Over Nickel       | 22575    |
| Gold Plated 15u" On Contact Area,Tin<br>Plated On Solder Tails,Over Nickel | 20187    |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 20187

APPROVED BY  
 MEI  
 CHECKED BY  
 HZF  
 DRAWING BY  
 CYP

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 0~15 ±0.15  
 15~30 ±0.20  
 30~ ±0.25  
 ANG. ±1°

SCALE NONE REV. C1

UNIT mm

NO. REV. REVISIONS CHK DATE

△ C1 Modify Data HZF 09/06/2023  
 △ C0 NEW RELEASE HZF 08/06/2018