


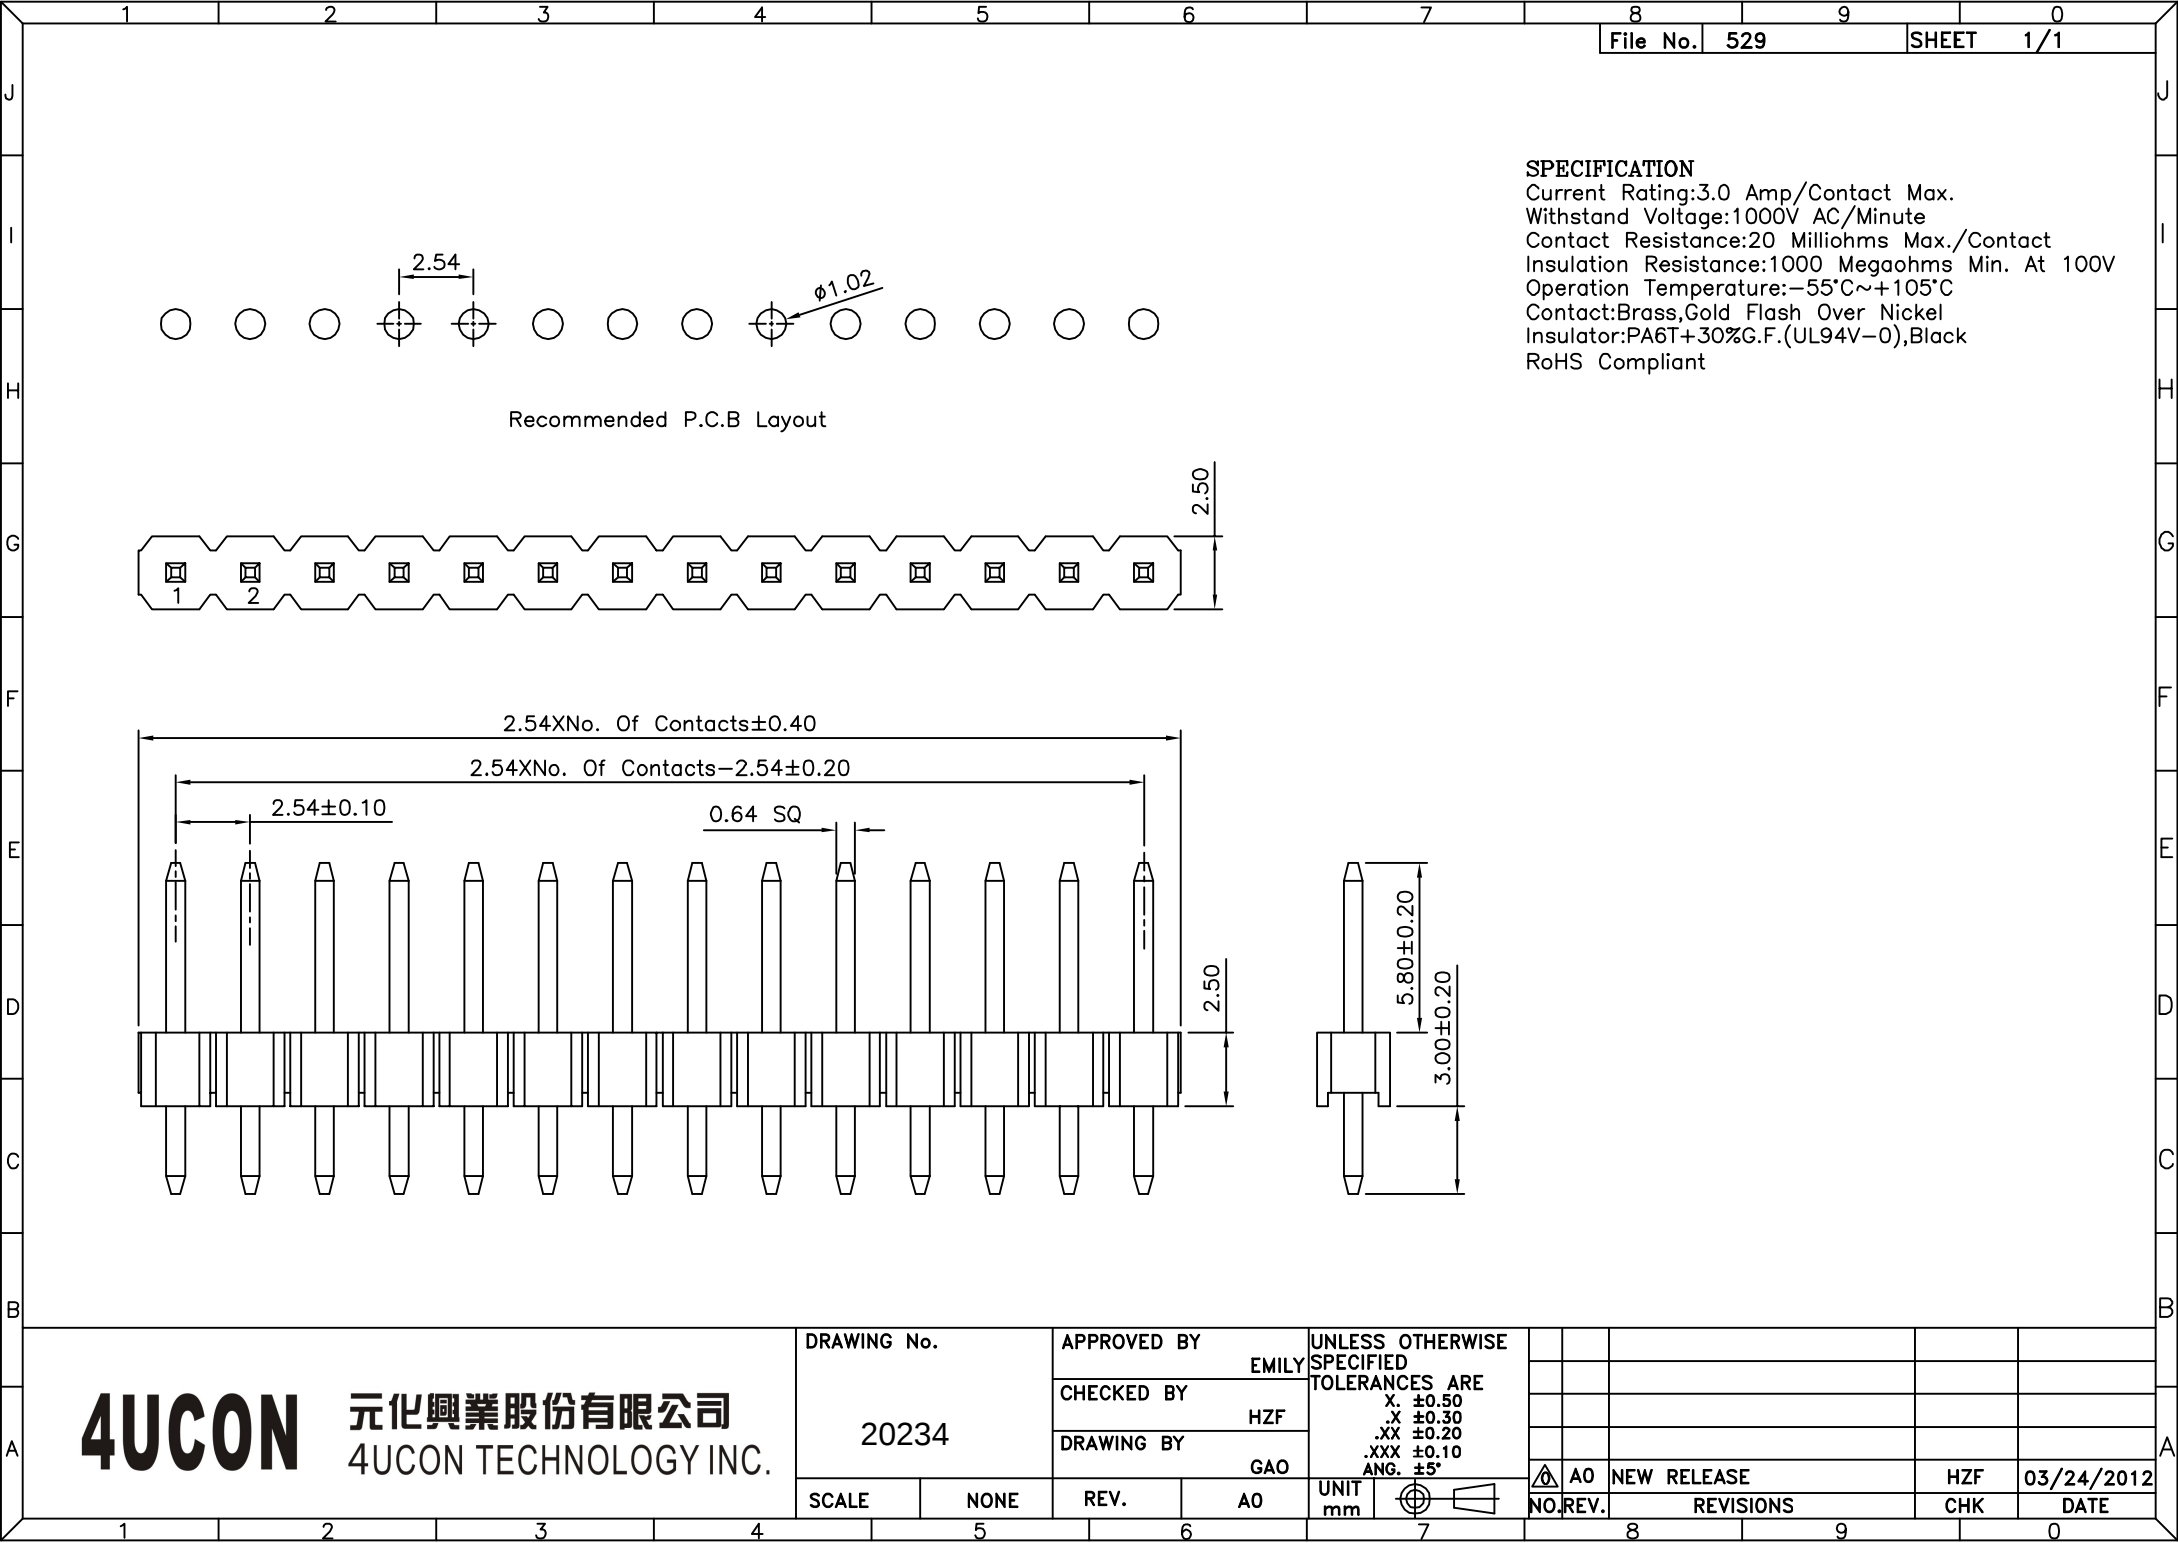

SPECIFICATION
Current Rating:3.0 Amp/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20234		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY GAO	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±5°

UNIT	mm	NO.	REV.	REVISIONS	CHK	DATE
		△ A0		NEW RELEASE	HZF	03/24/2012