





SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C

⚠ Insulator:PBT(UL94V−0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

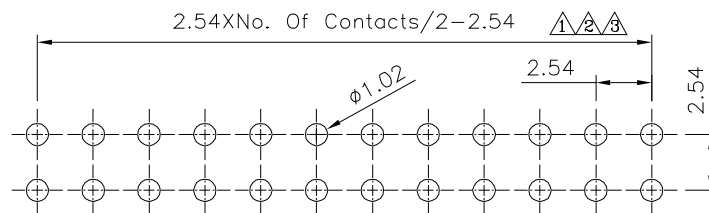

Recommended P.C.B. Layout
 Tolerance:±0.05 (Top View)

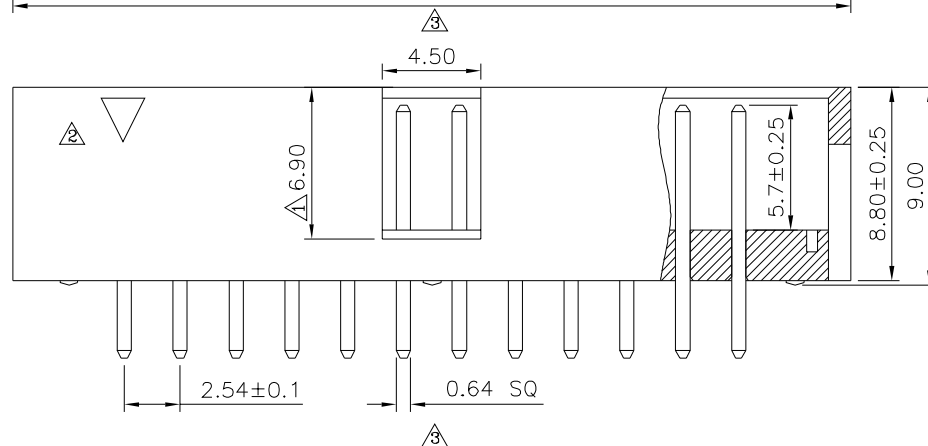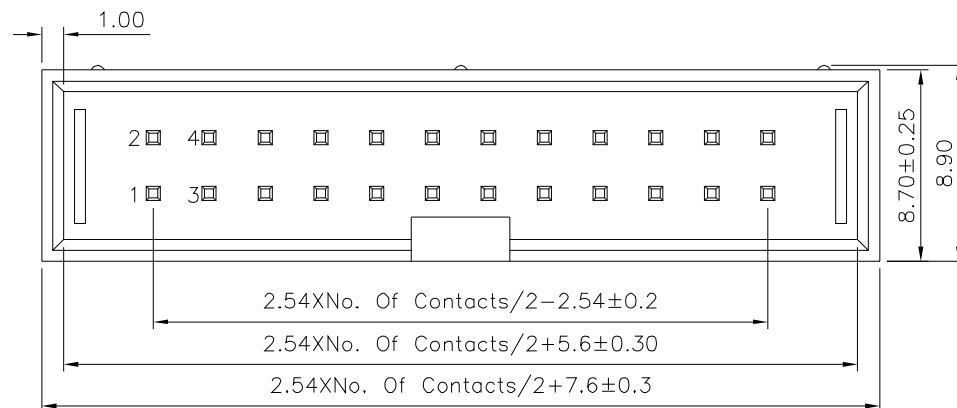

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

20254

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF


DRAWING BY HAO

REV. A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

⚠	X	±0.25	X*	±2*
⚠	.X	±0.20	.X*	±1.5*
⚠	.XX	±0.15	.XX*	±1.0*
⚠	.XXX	±0.1	.XXX*	±0.5*

UNIT mm



⚠	A4	Modify Data	HZF	01/10/2023
⚠	A3	Modify Data	HZF	04/17/2015
⚠	A2	Modify Data	HZF	11/20/2013
⚠	A1	Modify Data	HZF	09/03/2013
⚠	A0	NEW RELEASE	HZF	12/14/2010
NO.	REV.	REVISIONS	CHK	DATE