

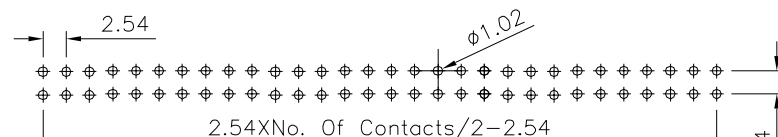



SPECIFICATION

Current Rating:3 Amps
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 ⚠ Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Only 60P~64P With Slot "A"
 Less Than 18 Pin Without Slot "B"
 RoHS Compliant

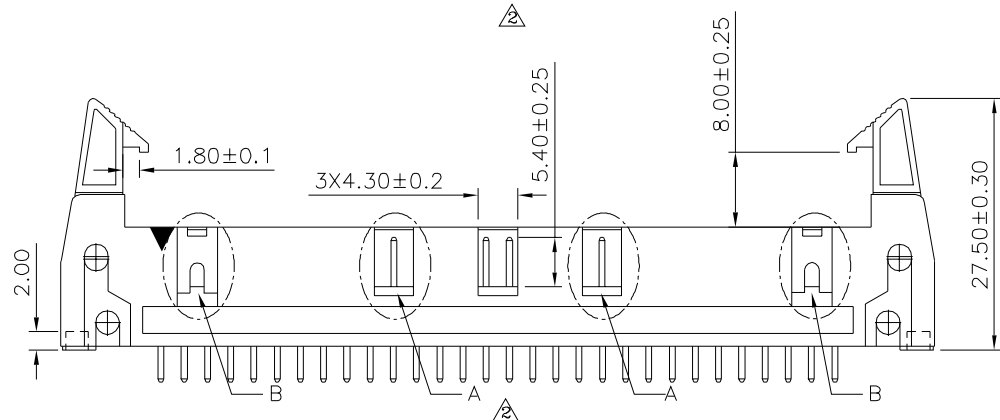

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

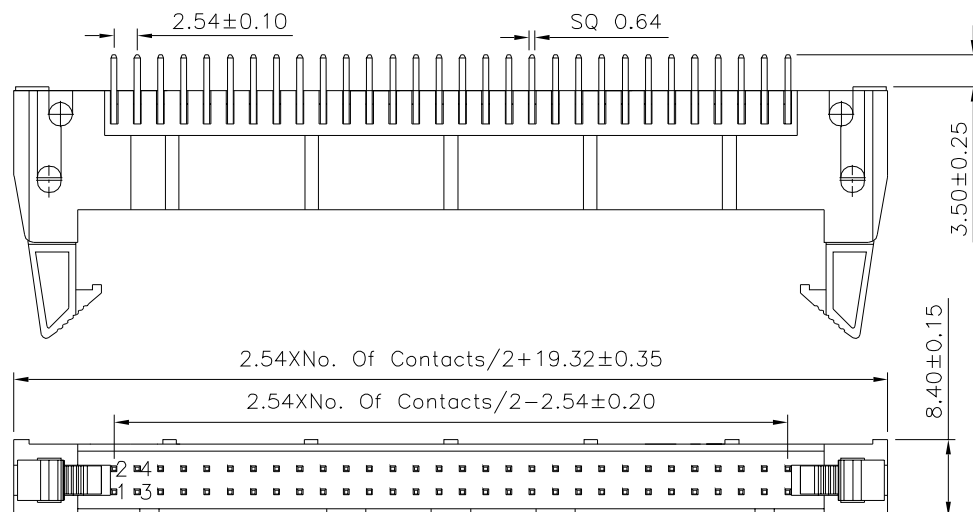

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 1/2

20263

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP


SCALE NONE

REV. B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
1	B2	Modify Data	HZF	10/21/2019
2	B1	Modify Data	HZF	03/21/2016
3	B0	NEW RELEASE	HZF	05/14/2015