









△ SPECIFICATION
Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

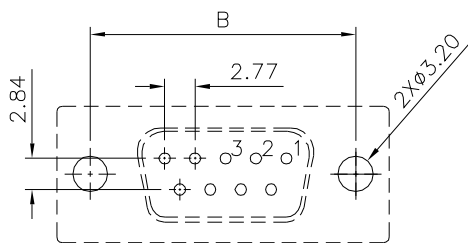

△ Recommended P.C.B. Layout

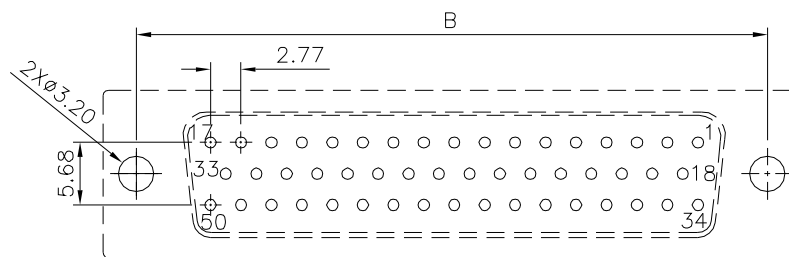

△ Recommended P.C.B. Layout

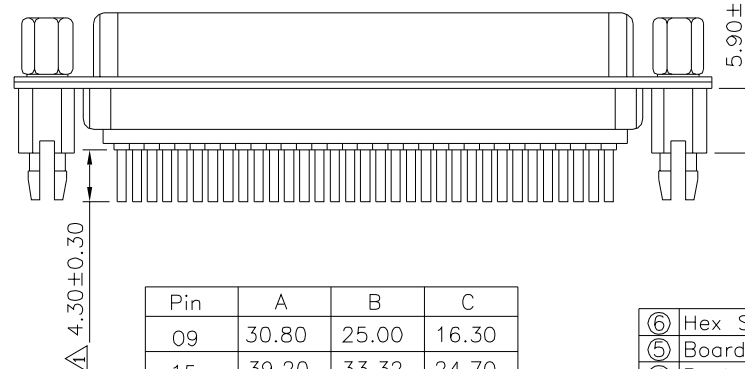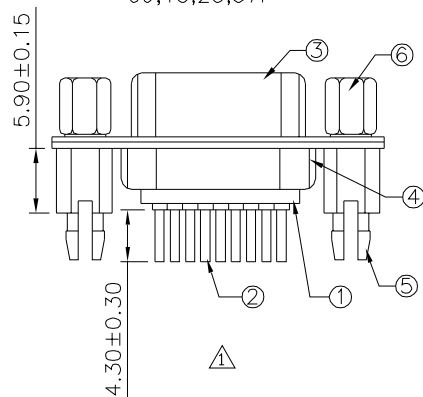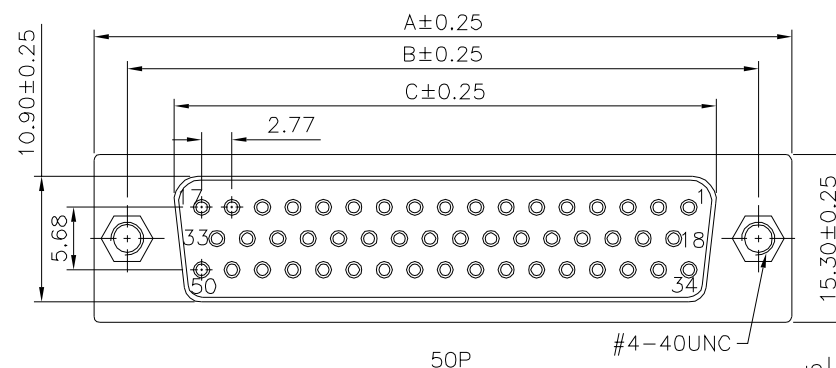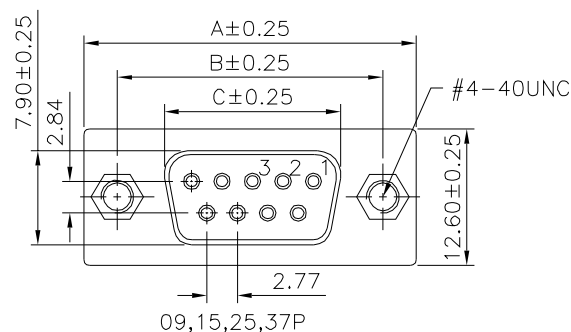

Pin	A	B	C
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80
50	67.10	61.00	52.20

⑥	Hex Screw	2	Brass	Nickel Plated	
⑤	Boardlock	2	Brass	Tin Plated	
④	Back-Shell	1	Cold Rolled Steel	Tin Plated	
③	Front-Shell	1	Cold Rolled Steel	Tin Plated	
②	Contact	2	Brass	Gold Plated Over Nickel	
①	Housing		PBT,UL94V-0	Black	
△	No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20336

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

UNIT
mm



△ A1

Modify Data

HZF

04/02/2015

△ A0

NEW RELEASE

HZF

03/18/2012

NO. REV.

REVISIONS

CHK

DATE