

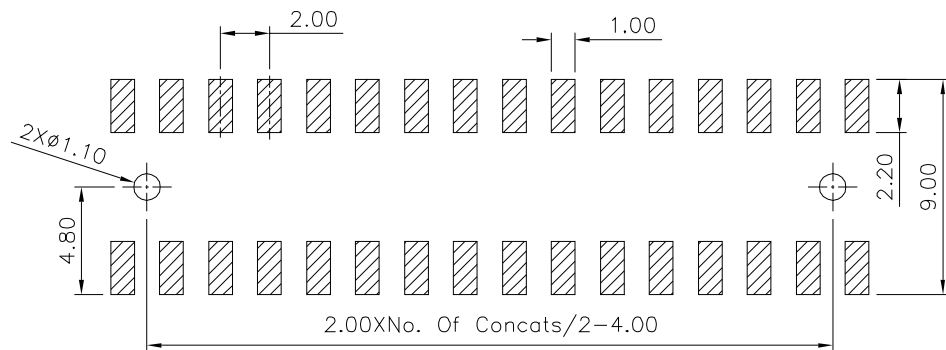
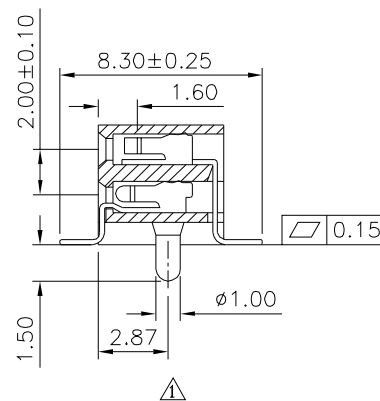


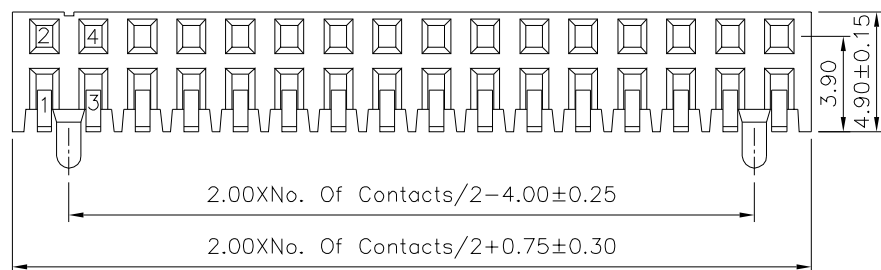

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

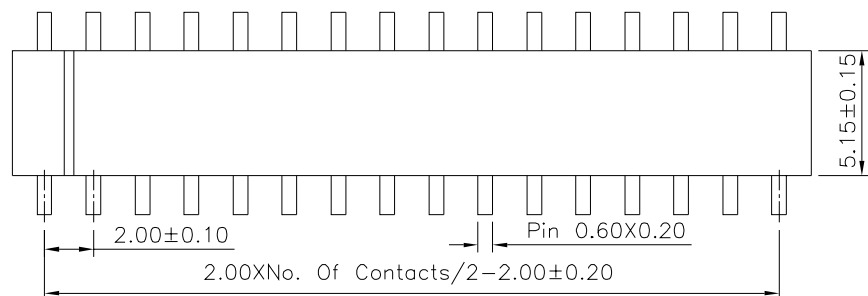

SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
⚠ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20352

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A2	Modify Data	HZF	12/15/2017	
⚠ A1	Modify Data	HZF	07/17/2012	
⚠ A0	NEW RELEASE	HZF	07/15/2009	