




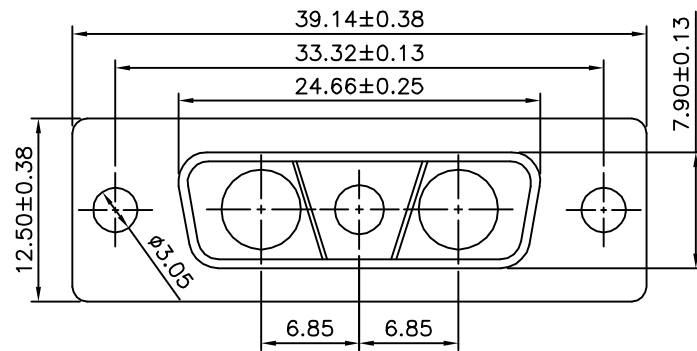


△



△

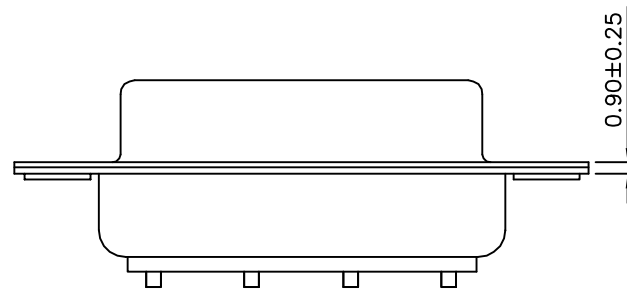


△

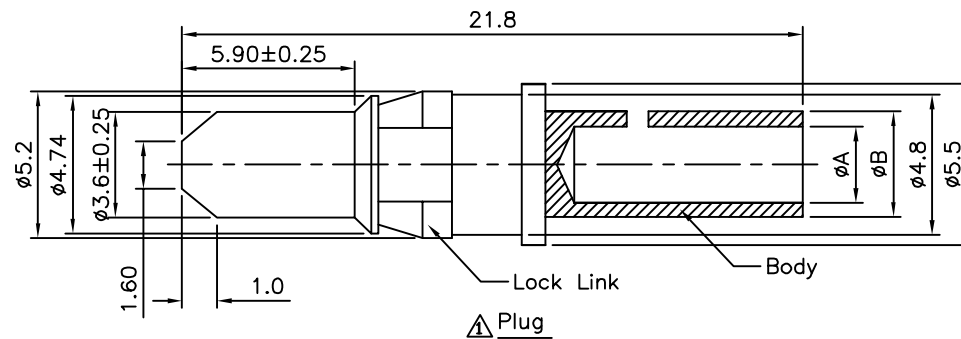

△ Plug

SPECIFICATION

Insulator: PBT+30%G.F.(UL94V-0)
Metal Shell: Steel,Nickel Plated
Terminal Body: Brass,Gold Flash Over Nickel
Terminal Lock Link:Brass,Nickel Plated
RoHS Compliant

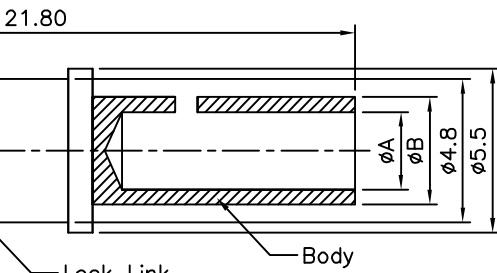

Lock Link

△ Socket

Item No.	Current Rating	Wire Size	φA	φB
20397	30 Amps	AWG #10	3.7	4.6
20282	20 Amps	AWG #12	2.7	3.6

DRAWING No.

20397

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.3

.XX ±0.3

ANG. ±2°

UNIT mm



△ A1

Modify Data

HZF

06/15/2012

△ A0

NEW RELEASE

BECKY

06/16/2005

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.