

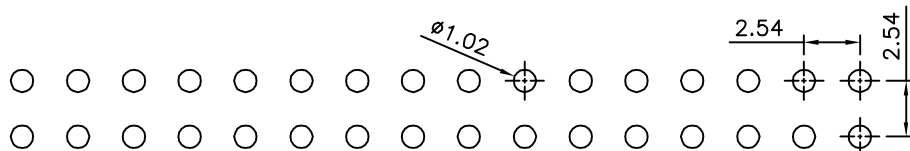
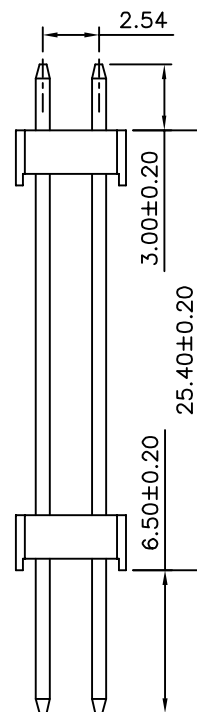


SPECIFICATION

Current Rating:3.0 Amp/Contact Max.
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

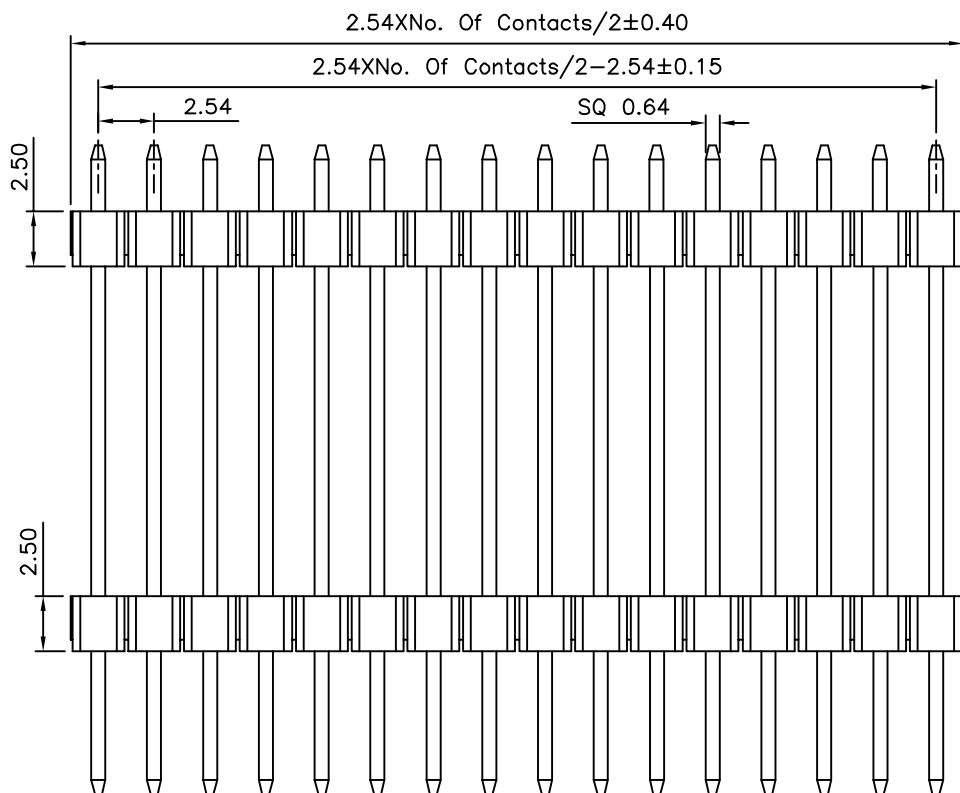

Recommended P.C.B. Layout



4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20425

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

AO

NEW RELEASE

REVISIONS

CHK

DATE

AO

NEW RELEASE

REVISIONS

CHK

DATE