
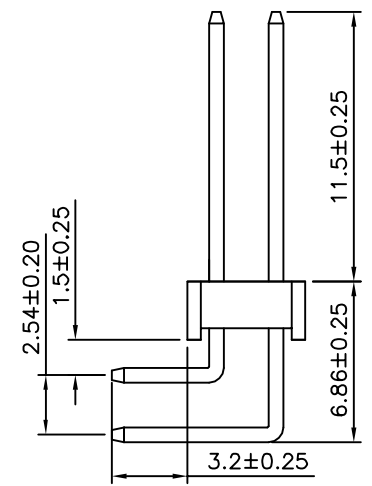
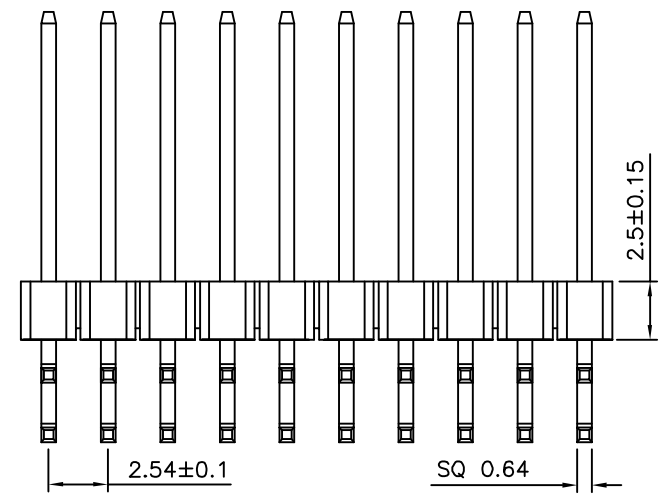


**SPECIFICATION**  
 Current Rating: 3 Amp  
 Withstanding Voltage: 1000V AC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 Contact: Brass, Gold Flash Over Nickel  
 Insulator: PA6T(UL94V-0), Black  
 RoHS Compliant

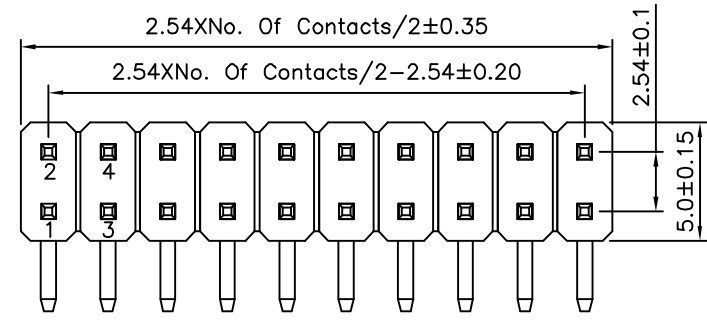

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
20557		MEI			
		HZF			
SCALE		DRAWING BY			
NONE		HAO		X: ±0.25 X.: ±2" .X: ±0.20 .X: ±1.5" .XX: ±0.15 .XX: ±1" .XXX: ±0.10 .XXX: ±0.5"	
UNIT	REV.	A0	UNIT		NO. REV.
mm			mm		

A0		NEW RELEASE		HZF		01/16/2015	
NO. REV.		REVISIONS		CHK		DATE	