

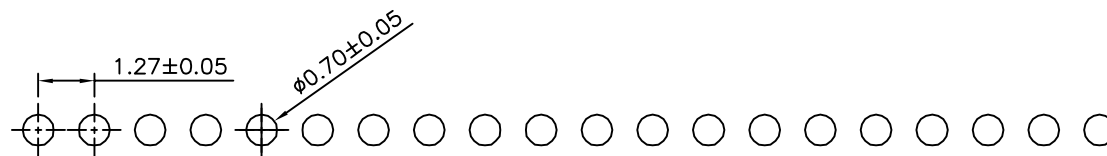



SPECIFICATION

Current Rating:1.0 Amps/Contact Max.
Withstand Voltage:300V AC/Minute
Contact Resistance:20 Milliohms/Contact Max.
Insulation Resistance:500 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

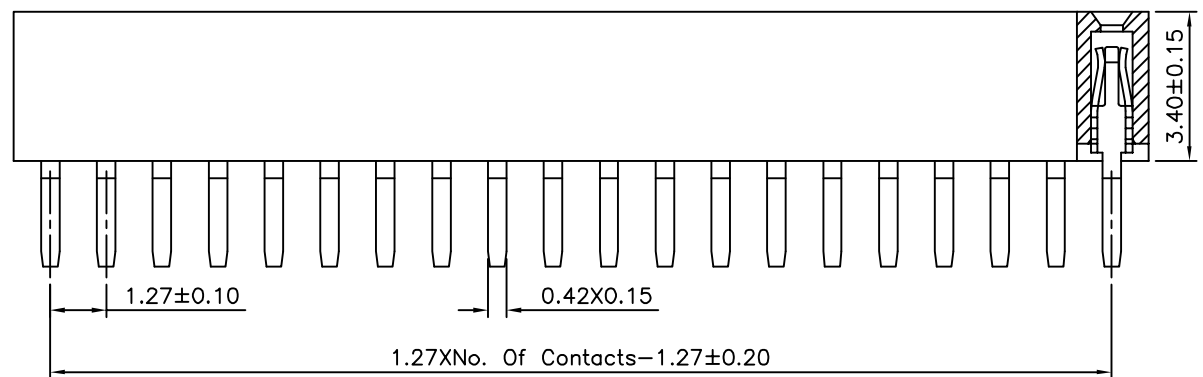

Recommended P.C.B. Layout

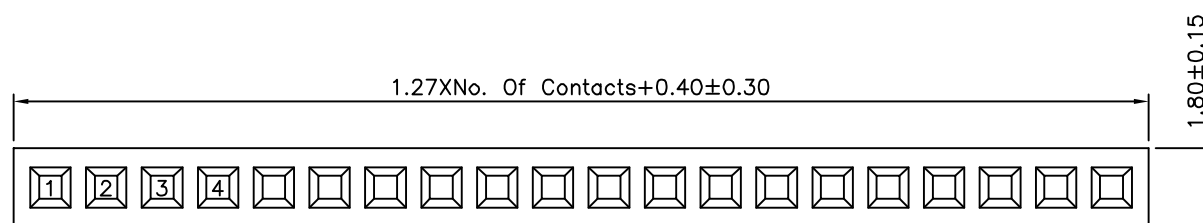

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20579

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±5°

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

07/26/2012

HZF

07/26/2012