
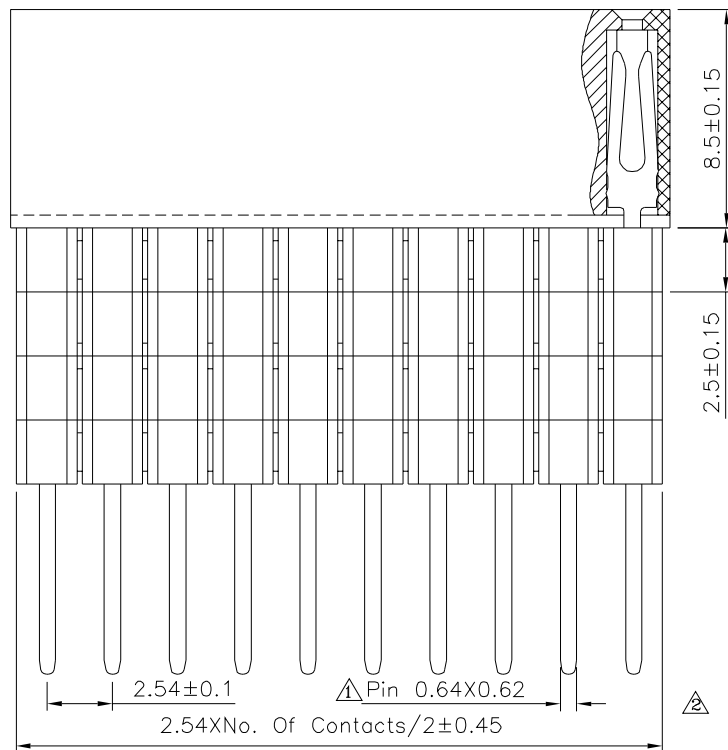


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

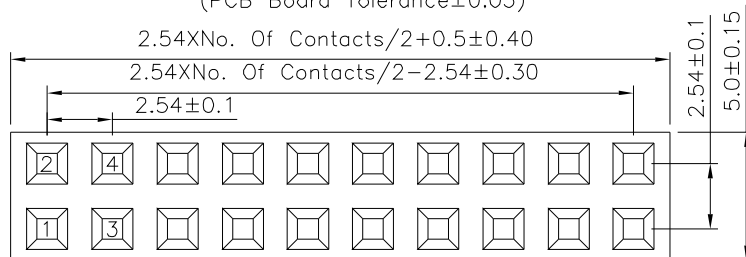


File No. 6970A26806 SHEET 1/1

SPECIFICATION

Current Rating:3A

Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C

Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

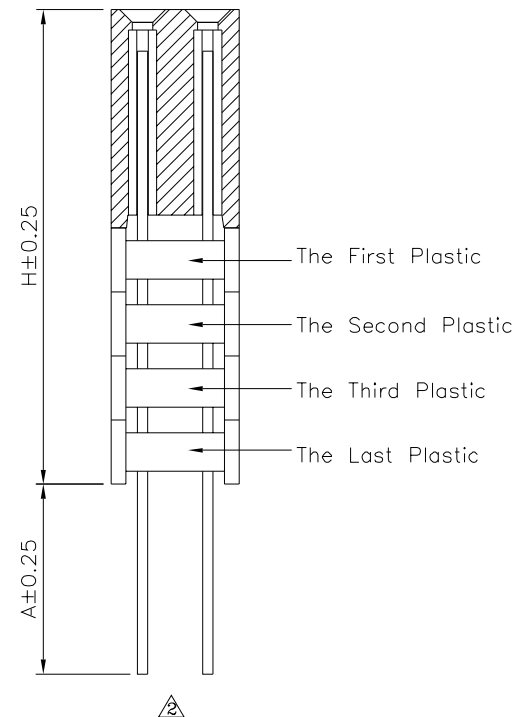

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20622

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30 X. ±2°
.XX ±0.25 .XX ±1.5°
.XXX ±0.15 .XXX ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	01/26/2024
A1		Modify Data	HZF	12/20/2023
A0		NEW RELEASE	HZF	05/03/2014