
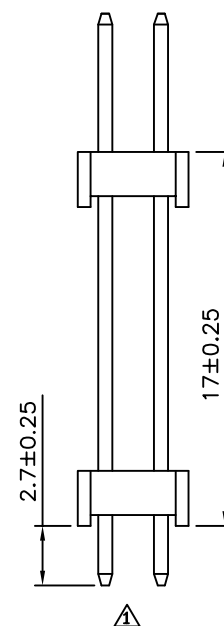
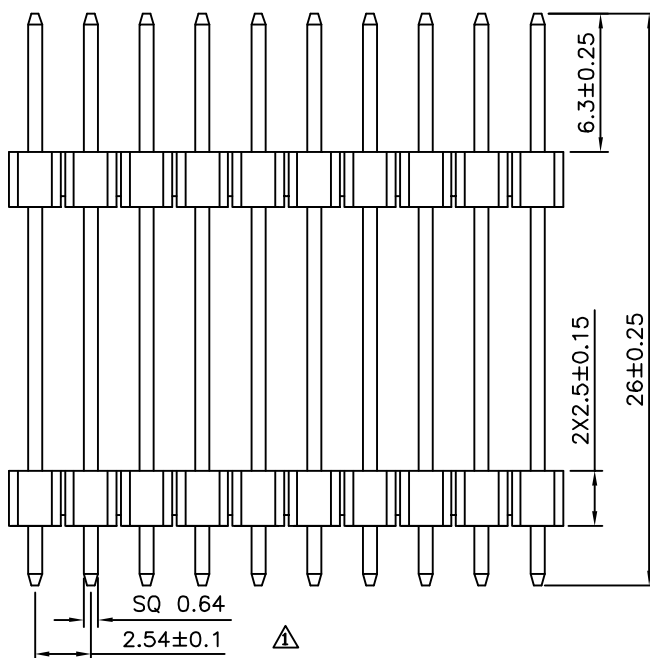
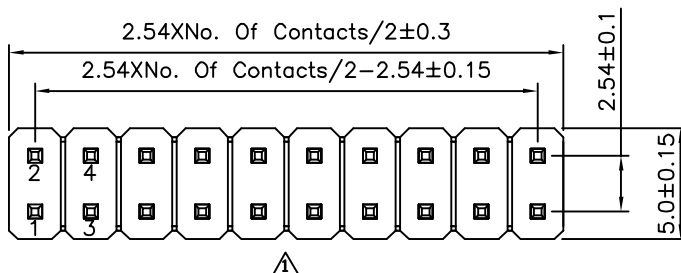


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

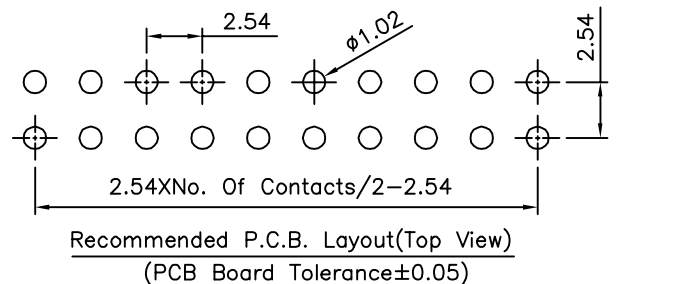

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20670

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.25 X. ±1.5
 .X ±0.20 .X ±1.5
 .XX ±0.15 .XX ±1.5
 .XXX ±0.10 .XXX ±0.5

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	03/23/2015
△	A0	NEW RELEASE	HZF	07/19/2014