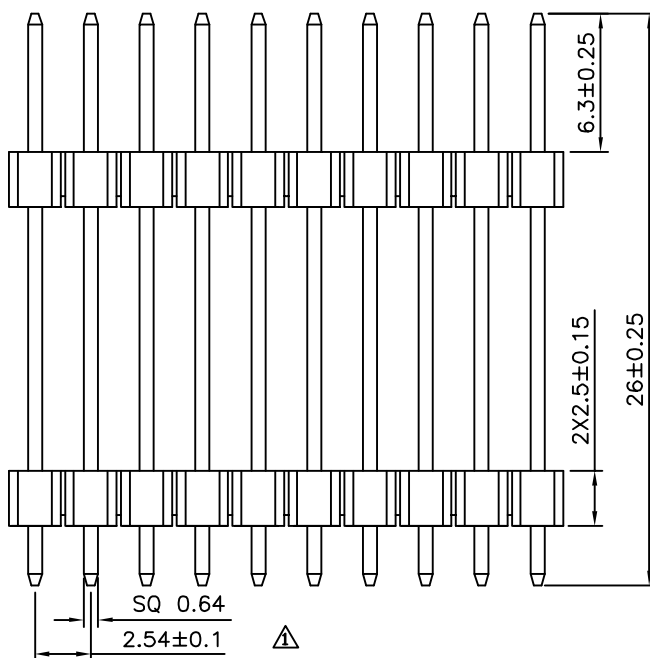
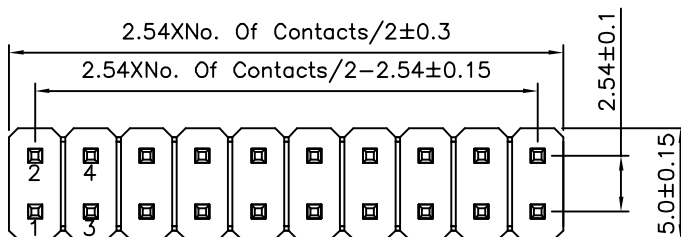
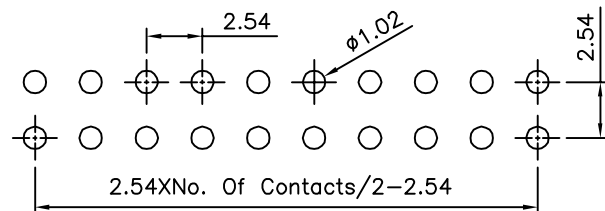


SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20672

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X. ±1.5
.X ±0.20 .X ±1.5
.XX ±0.15 .XX ±1.5
.XXX ±0.10 .XXX ±0.5

UNIT
mm



⚠	A1	Modify Data	HZF	03/23/2015
⚠	A0	NEW RELEASE	HZF	07/19/2014
NO	REV	REVISIONS	CHK	DATE