


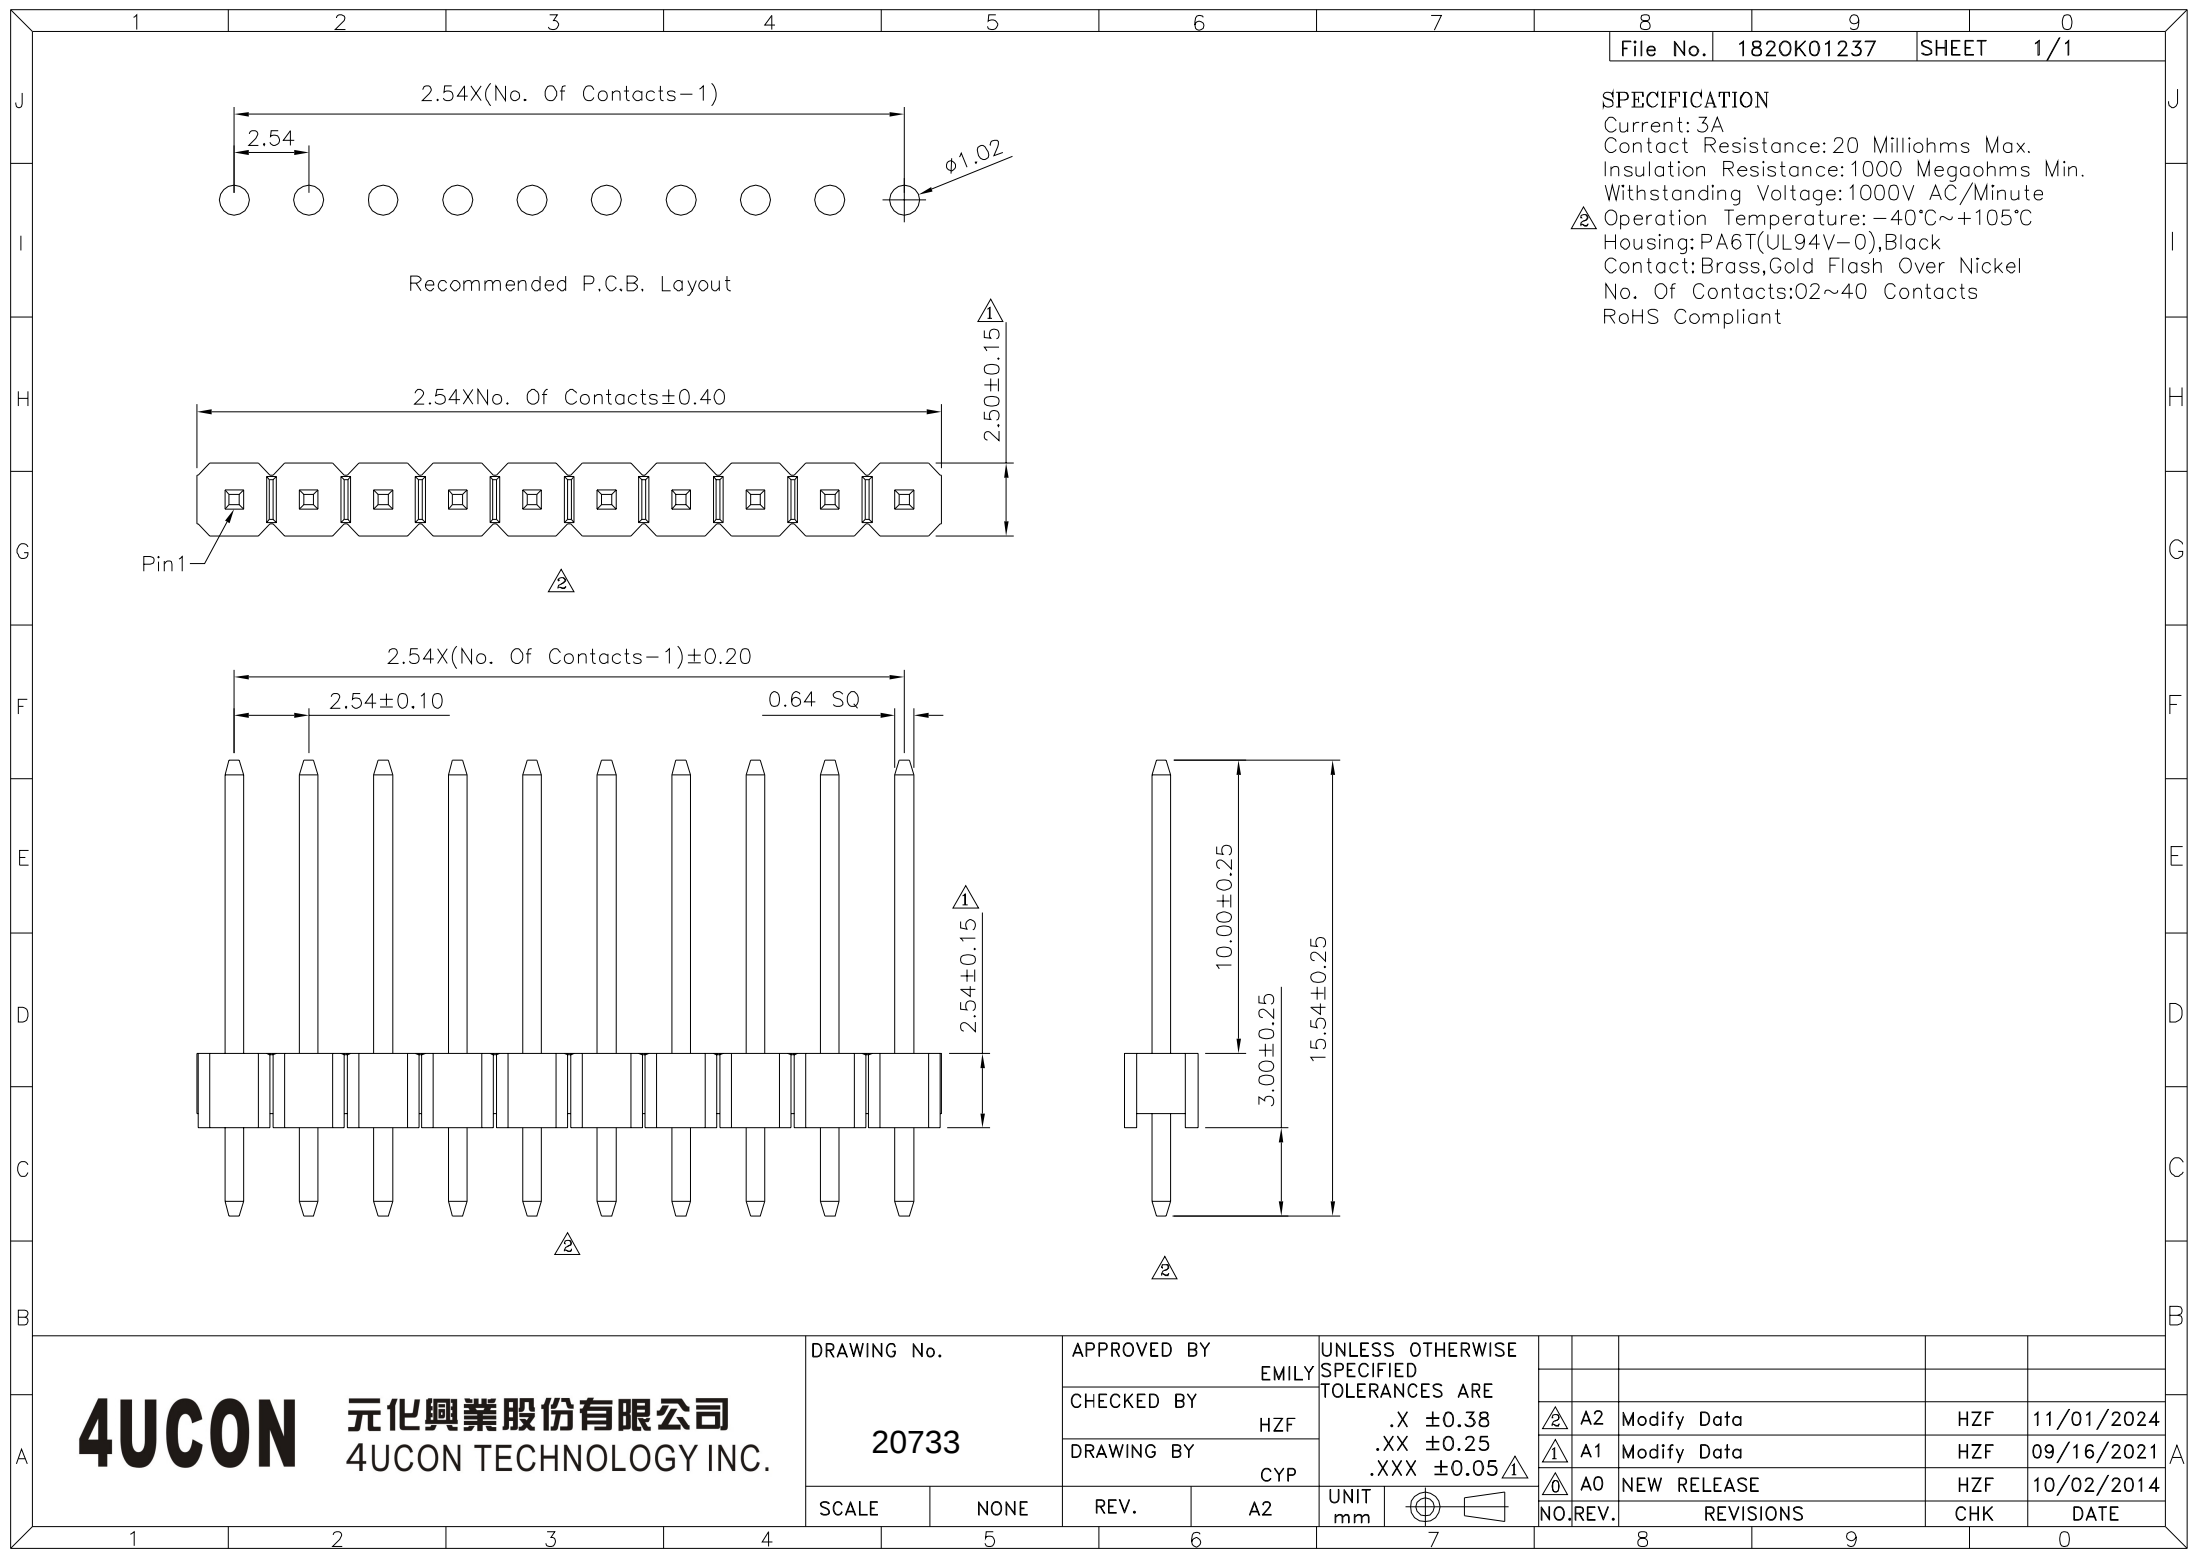

SPECIFICATION
Current: 3A
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: 1000V AC/Minute
⚠ Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Housing: PA6T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
No. Of Contacts: 02~40 Contacts
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20733

APPROVED BY	EMILY
CHECKED BY	HZF
DRAWING BY	CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
.XXX ± 0.05 ⚠

⚠ A2	Modify Data	HZF	11/01/2024	
⚠ A1	Modify Data	HZF	09/16/2021	
⚠ A0	NEW RELEASE	HZF	10/02/2014	
NO. REV.	REVISIONS	CHK	DATE	