
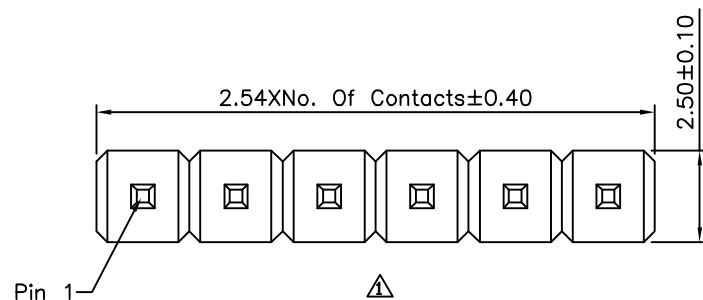
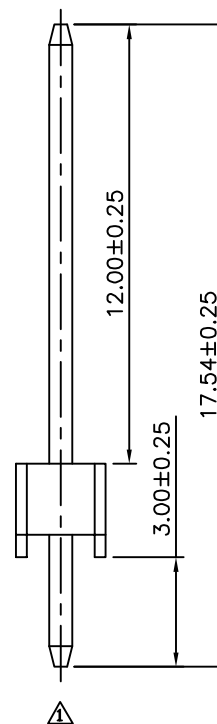


△ Recommended P.C.B. Layout

△ SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

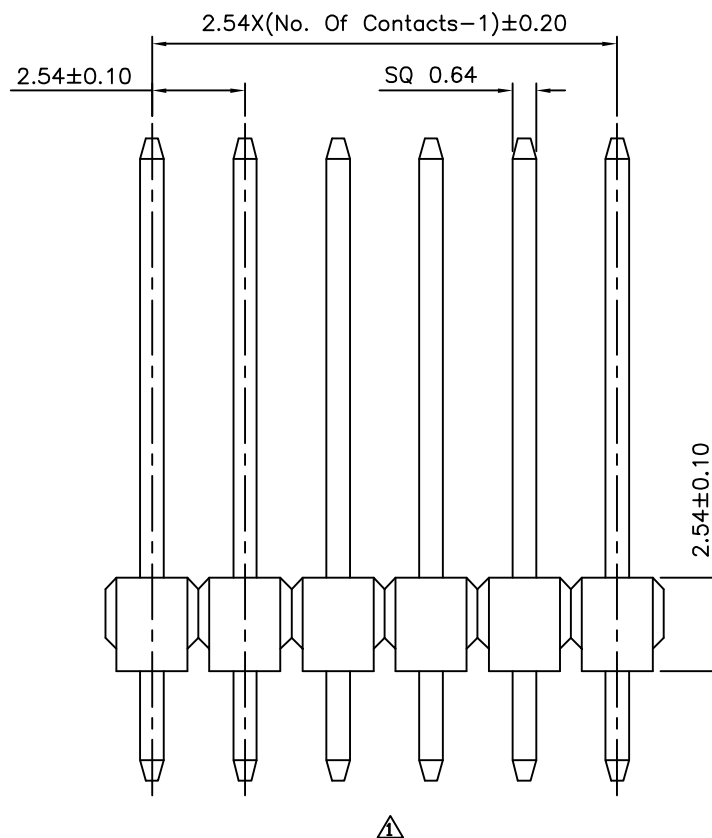

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20736

APPROVED BY
EMILY

CHECKED BY
HZF

DRAWING BY
SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.38
.XX ±0.25
ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	03/02/2013
△ A0		NEW RELEASE		