



SPECIFICATION



Withstand Voltage:1000V AC Per Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+125°C
 ⚠ Insulator:PBT+30%G.F.(UL94V-0)
 Contact:Brass,Gold Flash Over Nickel
 Metal Shell:Steel,Tin Plated
 Metal Bracket:Steel,Nickel Plated
 Boardlock:Brass,Nickel Plated
 RoHS Compliant

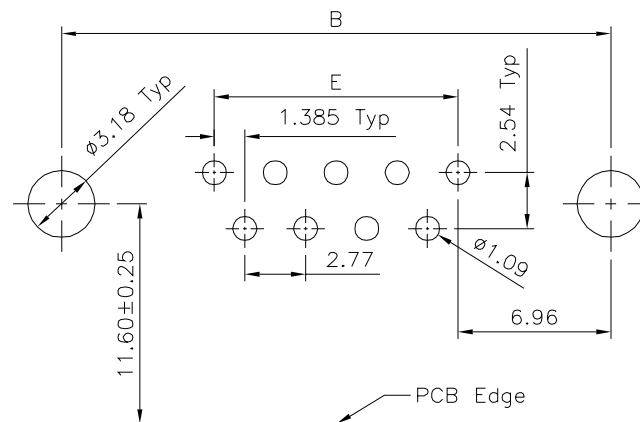

Recommended P.C.B. Layout

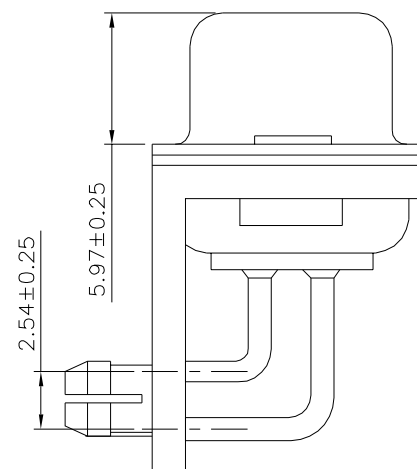

Pin	A±0.25	B±0.13	C±0.38	D±0.25	E±0.25
09	16.92	24.99	30.81	19.28	11.08
15	25.25	33.32	39.14	27.51	19.39
25	38.96	47.04	53.04	41.28	33.24
37	55.42	63.50	69.32	57.71	49.86

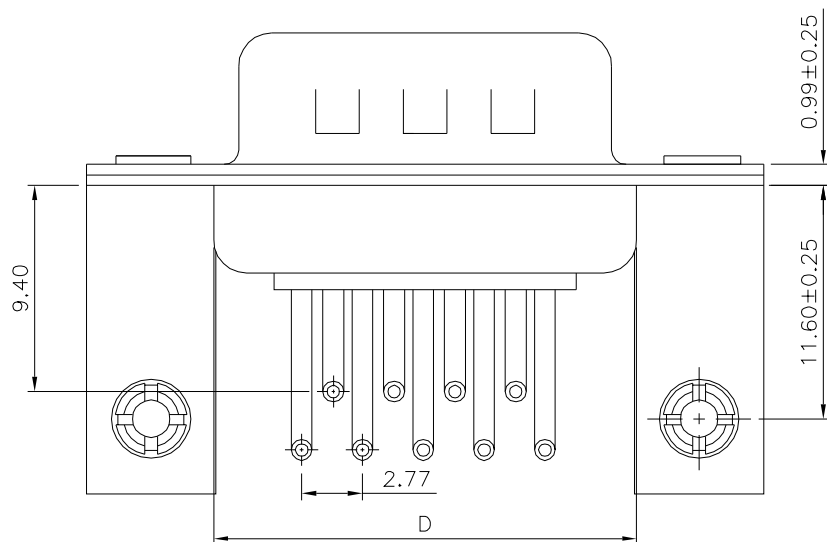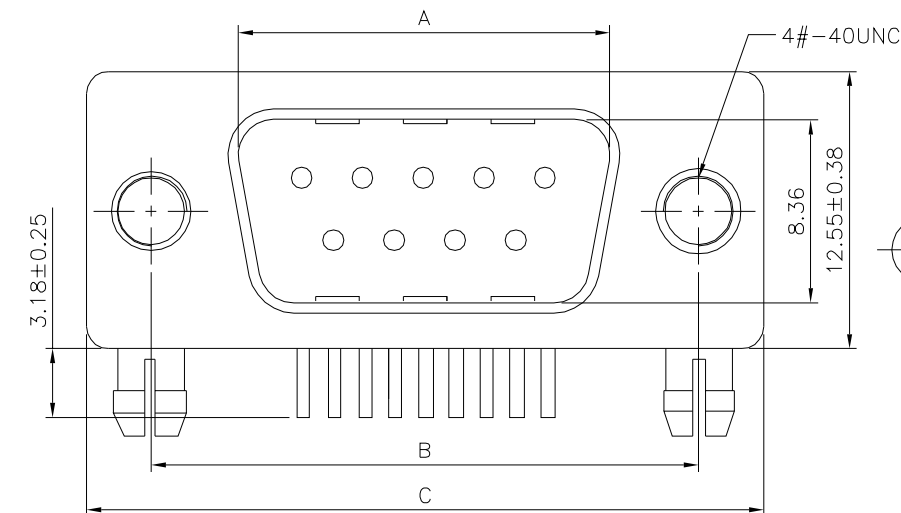

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20802

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.3
 .XX ±0.3
 .XXX ±0.3
 ANG. ±2°

UNIT
 mm



NO.

REV.

REVISIONS

CHK

DATE

A1 Modify Data

A0 NEW RELEASE

HZF

HZF

02/23/2019

12/07/2012