


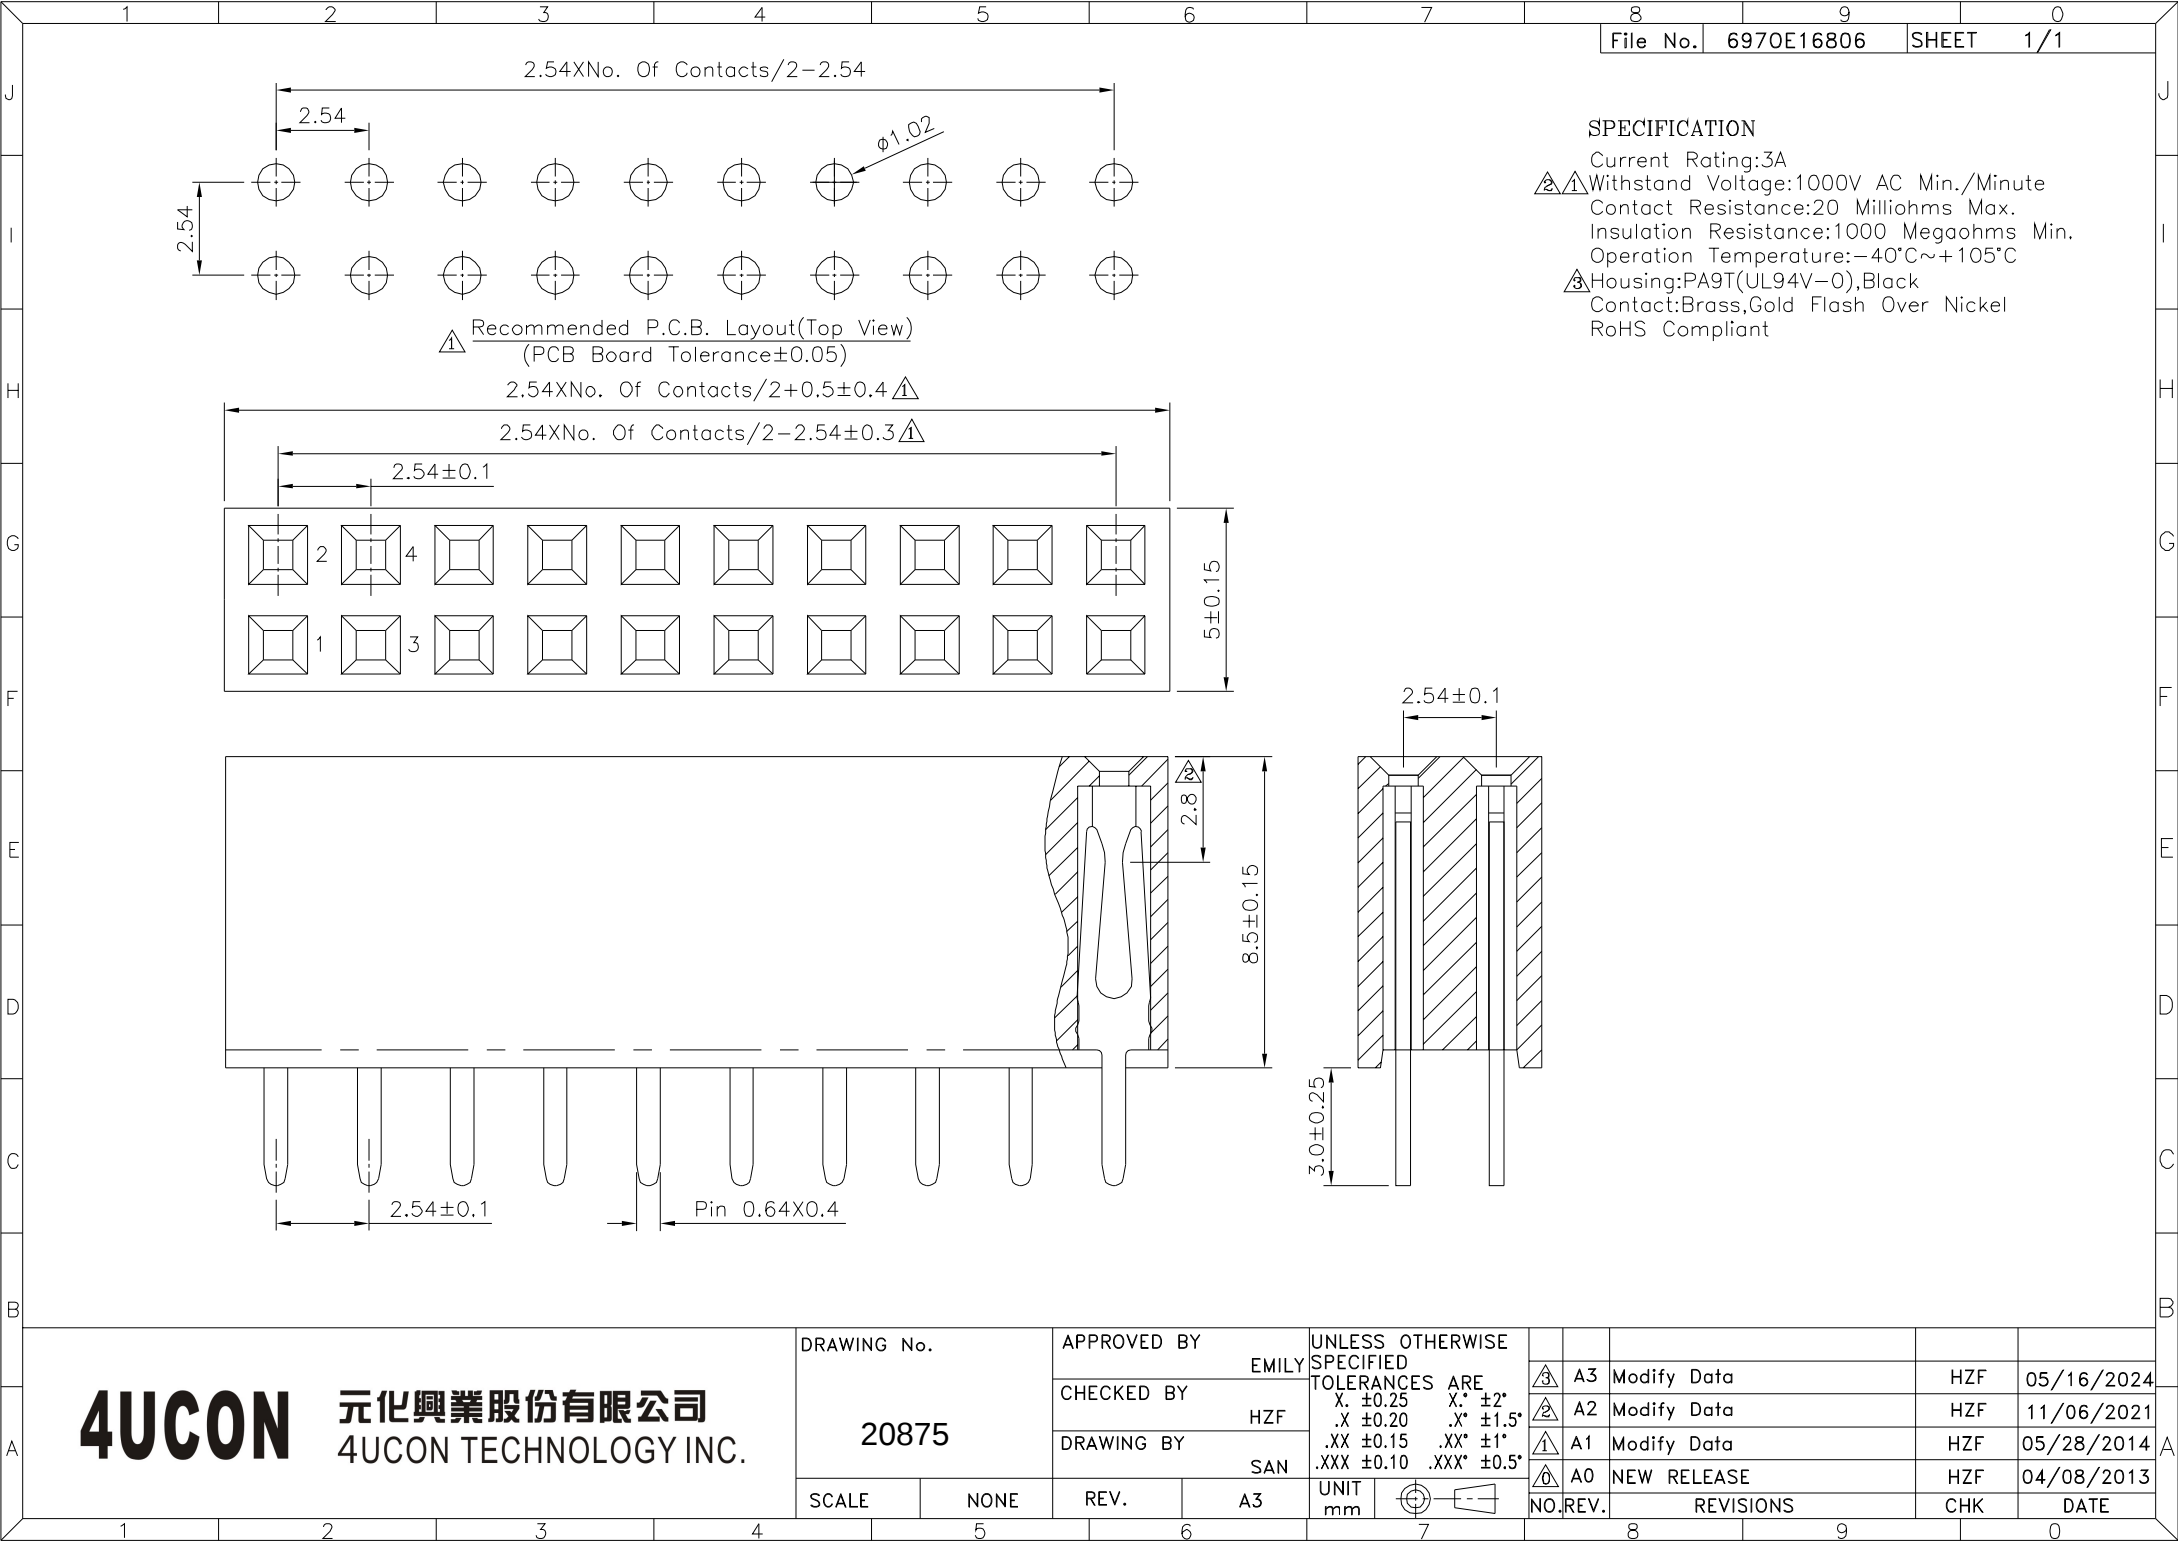

SPECIFICATION

Current Rating:3A

2.1 Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature:-40°C~+105°C

3. Housing:PA9T(UL94V-0),Black

Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

2.54XNo. Of Contacts/2+0.5±0.4

2.54XNo. Of Contacts/2-2.54±0.3

2.54±0.1

5±0.15

8.5±0.15

2.54±0.1

Pin 0.64X0.4

2.54±0.1

3.0±0.25

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

20875

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

A3

UNLESS OTHERWISE  
SPECIFIED

TOLERANCES ARE  
X. ±0.25 X.\* ±2"  
.X ±0.20 .X\* ±1.5"  
.XX ±0.15 .XX\* ±1"  
.XXX ±0.10 .XXX\* ±0.5"

UNIT  
mm



3. A3

Modify Data

HZF

05/16/2024

2. A2

Modify Data

HZF

11/06/2021

1. A1

Modify Data

HZF

05/28/2014

0. A0

NEW RELEASE

HZF

04/08/2013

NO. REV.

REVISIONS

CHK

DATE