

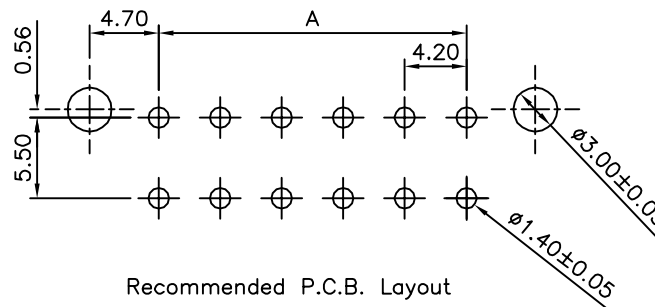
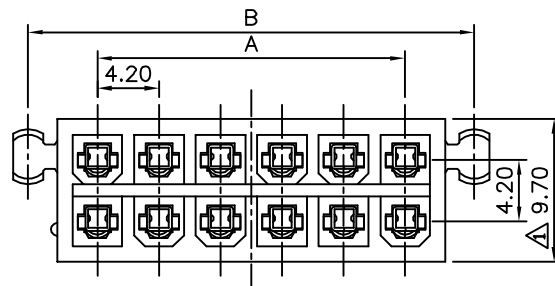
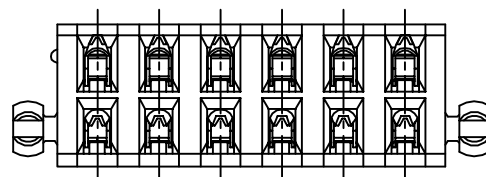
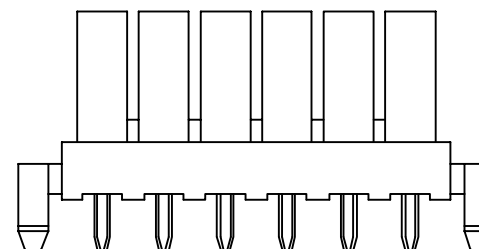


SPECIFICATION

Electrical Rating: C-UL 600V 4A, AC/DC
 Insulator: PA66(UL94V-0), White
 Contact: Brass, Tin Plated Over Nickel
 RoHS Compliant



Recommended P.C.B. Layout

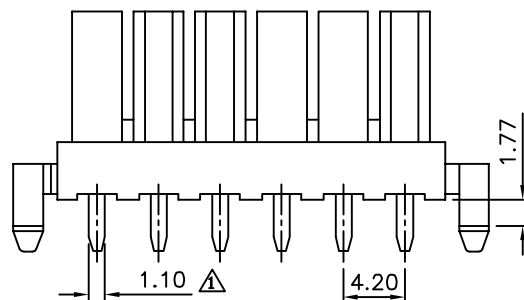

Pin	A	B
2	—	9.40
4	4.20	13.60
6	8.40	17.80
8	12.60	22.00
10	16.80	26.20
12	21.00	30.40
14	25.20	34.60
16	29.40	38.80
18	33.60	43.00
20	37.80	47.20
22	42.00	51.40
24	46.20	55.60
26	50.40	59.80
28	54.60	64.00
30	58.80	68.20
32	63.00	72.40
34	67.20	76.60
36	71.40	80.80
38	75.60	85.00
40	79.80	89.20

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20880

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±2°


SCALE

NONE

REV.

BO

UNIT
 mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

BO

NEW RELEASE

HZF

10/25/2015